

JET SKI® STX-15F

Watercraft

Wasserfahrzeug

Véhicule Nautique à Moteur

OWNER'S MANUAL BETRIEBSANLEITUNG MANUEL DE L'UTILISATEUR

 **Read this manual carefully. It contains safety information.**

 **Anleitung bitte sorgfältig lesen. Sie enthält Informationen zur Sicherheit.**

 **Lire ce manuel attentivement. Il contient des consignes de sécurité.**

Kawasaki

ENGLISH

Watercraft Owner's Manual

Original instructions

⚠ WARNING


To reduce the risk of SEVERE INJURY or DEATH



**WEAR A PERSONAL
FLOTATION DEVICE (PFD)
AND PROTECTIVE CLOTHING**



**NEVER RIDE AFTER
CONSUMING DRUGS
OR ALCOHOL**



- **DO NOT APPLY THROTTLE WHEN ANYONE IS AT REAR OF PWC.** Water and/or debris exiting jet thrust nozzle can cause severe injury.
- **KEEP AWAY FROM INTAKE GRATE** while engine is on. Certain items can become entangled resulting in severe injury or drowning.

READ OWNER'S MANUAL FIRST!

- **TO AVOID COLLISIONS** resulting in INJURY or DEATH: **SCAN CONSTANTLY, OPERATE DEFENSIVELY, TAKE EARLY ACTION.** PWCs and other boats do not have brakes.



- **DO NOT RELEASE THROTTLE WHEN TRYING TO STEER.** You need throttle to steer.

- **OPEN ENGINE COMPARTMENT BEFORE STARTING ENGINE.** A concentration of gasoline fumes can cause a fire or explosion.
- **ATTACH ENGINE SHUT-OFF CORD (LANYARD)** to wrist and keep it free from handlebars so that engine stops if operator falls off.
- **RIDE WITHIN YOUR LIMITS AND AVOID AGGRESSIVE MANEUVERS.** Sharp turns or jumping wakes or waves can increase the risk of back/spinal or other injuries.
- **KNOW BOATING LAWS.**

Read This First!

Congratulations on purchasing a new Kawasaki JET SKI watercraft.

Your safety and the safety of other people is very important. The operator of the JET SKI watercraft is responsible for operating it safely.

This Owner's Manual explains how to operate the JET SKI watercraft properly to protect you and other people from injury. **The first part of this manual,**

and the instructions under " DANGER" and

" WARNING" in the main text are particularly important for ensuring safety. Please read them carefully and be sure to follow the warnings and instructions.

Safety alert symbols



These safety symbols alert the user to a possible human risk.

Be sure to follow all safety instructions that follow these symbols to avoid accidents that could result in personal injury or death.

Precautionary statements

These warnings indicate situations that could result in death or serious injury of the rider or other persons involved, or damage to the watercraft, and instructions on how to avoid them. The following symbols are used to indicate the seriousness of the danger.

DANGER

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

WARNING

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

NOTICE

NOTICE is used to address practices not related to personal injury.

NOTE

○ *NOTE indicates information that may help or guide you in the operation or service of the vehicle.*

About This Manual

Please keep this Owner's Manual for future reference. If you resell or transfer your JET SKI watercraft, be sure to provide this manual with the product.

Keep this Owner's Manual aboard your JET SKI watercraft in a waterproof bag at all times so that you can refer to it whenever necessary.

The information in this Owner's Manual may not completely match the actual product due to changes in the specifications.

Design Category

This watercraft belongs to # Category C and is designed to operate in winds up to Beaufort force 6 and the associated wave heights (significant wave height up to 2 m, see Note 1 below). Such conditions may also be encountered in exposed inland waters, in estuaries, and in coastal waters in moderate weather conditions.

Note 1

The significant wave height is the mean height of the highest one-third of the waves, which corresponds to the wave height estimated by an experienced observer. Some waves will be double this height.



is a trademark of Kawasaki Heavy Industries, Ltd. registered in U.S.A., Japan, Austria, Benelux, Sweden, Denmark, Switzerland, France, Canada, Finland, Norway, Greece, Italy, U.K., Portugal, Thailand, and Taiwan.

KAWASAKI JET SKI is a trademark of Kawasaki Heavy Industries, Ltd. registered in Australia.

All rights reserved. No part of this publication may be reproduced without our prior written permission.

© 2017 Kawasaki Heavy Industries, Ltd.

Mar. 1, 2017. (1)

Quick Reference Guide

This Quick Reference Guide will assist you in finding the information you're looking for.

 **SAFETY INFORMATION**

PREVENT MAJOR DAMAGE

GENERAL INFORMATION

PRE-RIDE CHECK

OPERATING INSTRUCTIONS

TRANSPORTING AND STORAGE

MAINTENANCE AND ADJUSTMENTS

 **IN AN EMERGENCY**

APPENDIX

MAINTENANCE RECORD

A Table of Contents is included after the Foreword.

TABLE OF CONTENTS

⚠ SAFETY INFORMATION	11	GENERAL INFORMATION	33
Read Owner's Manual Thoroughly before		Parts Location	33
Operation	11	Multifunction Meter	35
Wear PFD, Protective Clothing and Gear	11	Speedometer	37
Personal Flotation Device (PFD)	11	Tachometer	37
Wet Suit Bottoms or Other Protective		Multifunction Displays	37
Clothing	12	Fuel Level Gauge/"FUEL" Character/Red	
Other Protective Gear	12	Warning Indicator Light	41
Know Boating Laws	13	Engine Oil Indicator/"OILP" Character/Red	
Occupants and Load Limit	13	Warning Indicator Light	42
Attach Engine Shut-Off Cord (Lanyard)	14	Engine Cooling Water Temperature	
Ride within Your Limits	14	Indicator/"HEAT" character/Red Warning	
Do not Jump Wakes or Waves	15	Indicator Light	42
Never Ride after Consuming Drugs or Alcohol	15	Low Battery Voltage Indicator/"bAt"	
Do not Apply Throttle when Anyone is Behind	16	Character/Red Warning Indicator Light	43
Keep Away from Intake Grate	16	Engine Oil Temperature Indicator/"OILt"	
Avoid Collision	17	Character/Red Warning Indicator Light	43
Ventilate Engine Compartment	18	Engine Oil Overheat Indicator/"OILH"	
Keep Your Watercraft in Safe Condition	19	Character/Red Warning Indicator Light	44
Pre-Ride Check	19	Engine Warning Indicator/"FI" Character/Red	
Regular Maintenance / Modification	19	Warning Indicator Light	44
Never Operate after Dark	20	Immobilizer Amplifier Indicator/"Innb"	
Follow Rules	20	Character/Red Warning Indicator Light	45
Label Location	22	Immobilizer Key Matching Indicator/"Inl"	
PREVENT MAJOR DAMAGE	29	Character/Red Warning Indicator Light	45
Tilting the Watercraft	29	Communication Trouble Indicator/"Err"	
Righting Capsized Watercraft	30	Character/Red Warning Indicator Light	46
Shallow Water	30	Fuel	47
Wave Jumping	31	Fuel Requirements:	47
After daily riding	31	Filling the Tank:	48
Jet Pump and Seals Periodic Maintenance	32	Ignition Switch	49

SLO/FPO Modes	49	Operator Swimming Ability	72
Smart Learning Operation mode (SLO)	51	Maximum Number of Persons	72
How to use the Immobilizer-function keys	51	Safe Riding Rules	72
Lost Keys	52	Personal Flotation Device and Safety Gear ...	73
EC Directive Compliance	53	Watercraft Helmet..... Something You Should	
Controls	53	Know	74
Kawasaki Smart Steering™ (KSS™)	53	Fire Extinguisher	74
Important Information	54	Weather condition	76
Important Information for Handlebar Cover ...	54	Basic Operating and Riding	77
Stop Button	54	Posture on the Seats	77
Engine Shut-off Lanyard Key	55	Operation with Passengers	77
Start Button	55	Boarding from Water	77
Throttle Lever	56	Break-In	78
Shift Lever	56	Stopping the Engine	78
Seat Latches	58	Starting the Engine	79
Storage Compartment	59	Launching	82
Center and Rear Storage Cases	60	Launching/Start	82
Tool Kit	61	Stopping the JET SKI Watercraft	84
Bilge Systems	61	Turning the JET SKI Watercraft	85
Drain Screws	62	Operating the JET SKI Watercraft in Reverse	88
Handrail	62	Docking the JET SKI Watercraft	89
Reboarding Step	63	Fall Recovery	89
Loading/Accessories/Modifications	64	Righting the Capsized Watercraft	90
Maximum load	64	After Submerging	92
Towing (a wakeboarder, water skier, tuber,		End of the Day Checklist	97
etc.)	66	Drain the Exhaust System	97
Towing a wakeboarder/water skier/tuber	66	Clean the Engine Compartment	97
Roles of the watercraft operator	67	Clearing Clogged Impeller	98
Roles of the observer	67	TRANSPORTING AND STORAGE	100
Towing a personal watercraft	67	Transporting	100
PRE-RIDE CHECK	69	STORAGE	101
OPERATING INSTRUCTIONS	72	Preparation for Storage	101
Basic Knowledge for Operation	72	Removal from Storage	107
Operation by unskilled riders	72	MAINTENANCE AND ADJUSTMENTS	110

EMISSION CONTROL INFORMATION	111
Periodic Maintenance Chart	113
Control Cables	116
Fuel System	122
Throttle Adjustments	122
Fuel Vent Check Valve	122
Fuel Pump Screen	122
Fuel Hose	122
Engine Oil	123
Oil Requirements	123
Oil Level Inspection	124
Oil and/or Oil Filter Changes	125
Valve Clearance	129
Spark Plugs	129
Battery	131
Lubrication	144
Cooling System Flushing	146
Bilge System Flushing	148
Jet Pump Bearings/Seals	149
Fuses	149
 IN AN EMERGENCY	151
Troubleshooting Guide	151
In the Case of Emergency	155
Towing the JET SKI watercraft	155
Jump Starting	155
APPENDIX	157
ENVIRONMENTAL PROTECTION	157
SPECIFICATIONS	158
Serial Numbers	161
Registration Numbers	162
MAINTENANCE RECORD	164

 Important. Read this carefully.

 **SAFETY INFORMATION 11**


SAFETY INFORMATION

WARNING

Read Owner's Manual Thoroughly before Operation

- Carefully read the instructions in every WARNING message in the owner's manual and on every warning label on your JET SKI watercraft before operating. Be sure to observe these instructions.
- The owner's manual and the warning labels provide important safety information.

Wear PFD, Protective Clothing and Gear

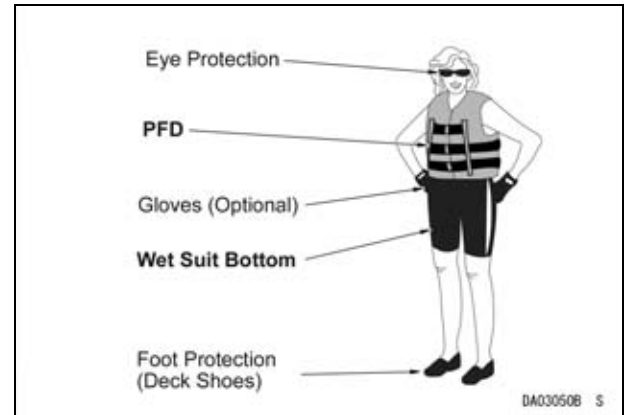

Personal Flotation Device (PFD)

- All riders must wear a personal flotation device (PFD) that is suitable for personal watercraft (PWC) use. Kawasaki recommends a vest-type PFD.

Hard impact with the water can result in loss of consciousness and drowning.

- Make sure that your PFD fits correctly so that it does not come off in the water. Never use an adult size PFD for children.


12 SAFETY INFORMATION

Wet Suit Bottoms or Other Protective Clothing

- All riders must wear wet suit bottoms (neoprene shorts) or clothing that provides equivalent protection against possible injury to body cavities.
- Normal swimwear will not provide adequate protection.

Injury from Forced Injection of Water into Body Cavities (Rectum or Vagina)

- As a result of falling into water or being near the jet thrust nozzle, water can be forced into body cavities such as the rectum or vagina. This could cause damage to abdominal organs, possibly resulting in death or severe injury.

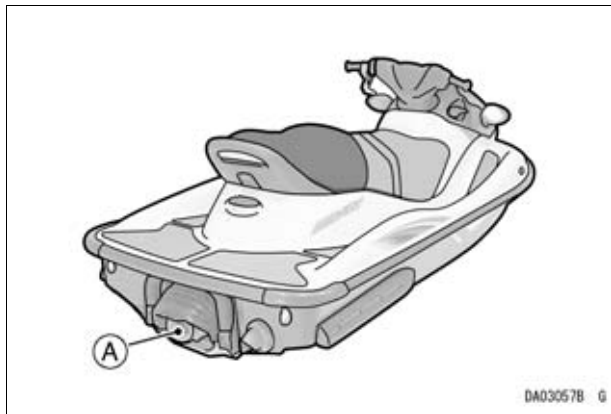

A. Jet Thrust Nozzle

- Wet suit bottoms are made of a thick material (neoprene) that significantly retards the velocity of water passing through it.

 Important. Read this carefully.

- In addition to wet suit bottoms, some other aquatic wear may protect against body cavity injuries.
- If wet suit bottoms are not available, you should select clothing that will maximize your protection. Materials that are thicker, have a tighter weave, are water repellent, or that are tighter fitting tend to provide more protection.
- Clothing that may be displaced by the force of water will not provide adequate protection.

Other Protective Gear

- Wear protective footwear, gloves and goggles (glasses).
- Wear suitable eye protection such as goggles while operating the watercraft. Water spray can damage your eyes, or momentarily interfere with your vision, which may lead to an accident. Floatable goggles are recommended.
- Wear foot protection such as deck shoes or tennis shoes. Submerged shells, rocks or other objects can injure your feet.

 Important. Read this carefully.

Know Boating Laws

Kawasaki recommends a minimum operator age of 16 years old. Know the operator age and training requirements for your state or region. A boating safety course is recommended and may be required in your state or region.

 SAFETY INFORMATION 13

Occupants and Load Limit

Occu- pants limit	3 persons (1 operator and 2 passengers)
	2 persons (1 operator and 1 observer) when towing a water skier, wakeboarder, or tuber
Load limit	225 kg (496 lb) including riders and cargo


- Exceeding the maximum number of occupants or the load limit can adversely affect the handling and stability of this watercraft, which can lead to an accident. Do not exceed the maximum capacity.
- All passengers must ride on the designated seats.

14 SAFETY INFORMATION

 Important. Read this carefully.

Attach Engine Shut-Off Cord (Lanyard)

- Attach the engine shut-off cord (lanyard) to your wrist whenever operating this watercraft so that the engine stops if the operator falls off.
- Keep the lanyard free from the handlebars or other objects.
- After riding, remove the lanyard from the watercraft to avoid unauthorized use by children or others.

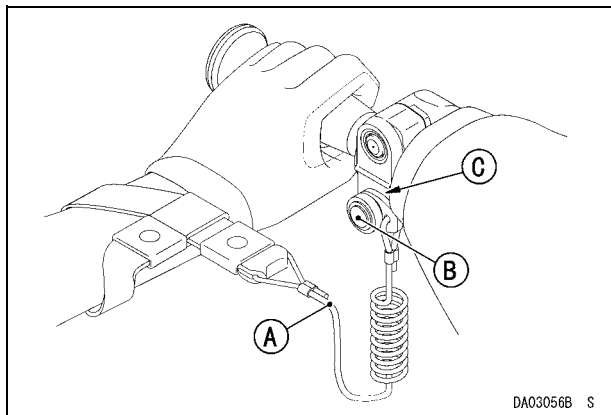

- A. Engine Shut-Off Cord
- B. Engine Stop Button
- C. Lanyard Key

Ride within Your Limits

- Ride within your limits and avoid aggressive maneuvers to reduce the risk of loss of control, ejection, and collision.
 - The JET SKI watercraft is a high-performance boat - not a toy.
- Do not operate the watercraft with any passengers on board until you have enough operating experience alone. Operating the watercraft with passengers requires good operating skills. Be accustomed to the handling characteristics of the watercraft and do practice well before operating with a passenger.



Important. Read this carefully.

Do not Jump Wakes or Waves

- Sharp turns or jumping wakes or waves can increase the risk of back/spinal injury (paralysis), facial injuries, and broken legs, ankles and other bones.



SAFETY INFORMATION 15

Never Ride after Consuming Drugs or Alcohol

- Never ride under the influence of or after consuming drugs or alcohol. Ensure your passengers are also free from drugs or alcohol.

16 SAFETY INFORMATION


Do not Apply Throttle when Anyone is Behind

- Do not apply throttle when anyone is behind the JET SKI watercraft.
- Turn the engine off or keep it at idle. Water and/or debris ejected from the jet thrust nozzle can cause severe injury.

 Important. Read this carefully.

Keep Away from Intake Grate

- Keep away from the intake grate while the engine is on.
- Items such as long hair, loose clothing, or PFD (personal flotation device) straps can become entangled in moving parts, resulting in severe injury or drowning.

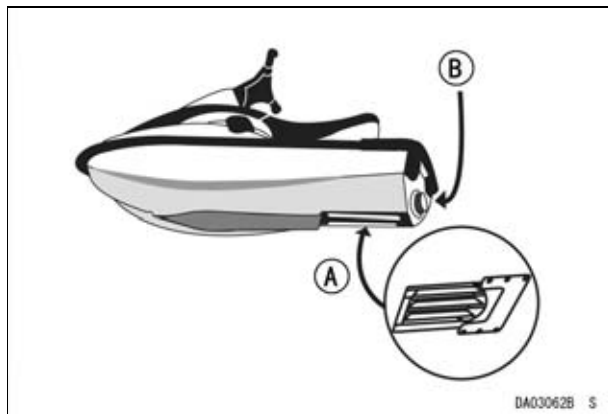

- A. Intake Grate
- B. Jet Thrust Nozzle


 Important. Read this carefully.

Avoid Collision

Collisions cause more injuries and deaths than any other type of personal watercraft accident.

To avoid collisions, know the characteristics of your watercraft and observe all warnings.

- Scan constantly for people, objects, and other watercraft.
- Be alert for conditions that limit your visibility or block your vision of others.

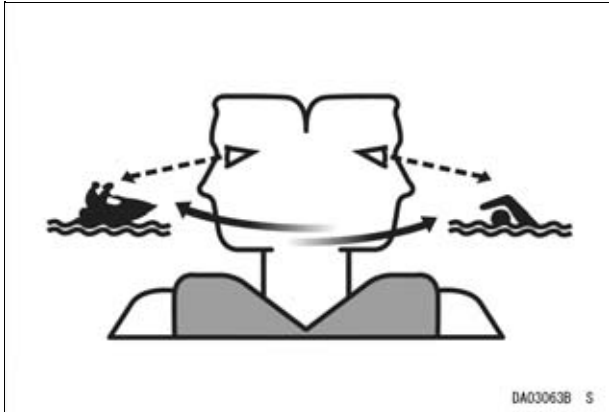


- Ride in safe water areas.
Operate defensively at safe speeds and keep a safe distance away from people, objects and other watercraft.
- Do not follow directly behind other watercraft or boats.
- Do not go near people or others to spray or splash them with water.

SAFETY INFORMATION 17


- Avoid sharp turns or other maneuvers that make it hard for others to avoid you or understand where you are going.
- Avoid areas with submerged objects or shallow waters.
- Take early action to avoid collisions. Remember personal watercraft and other boats do not have brakes.
- Do not release the throttle when trying to steer away from objects. You need throttle to steer.
- To avoid collisions you must have thrust to turn.

Turn with Thrust

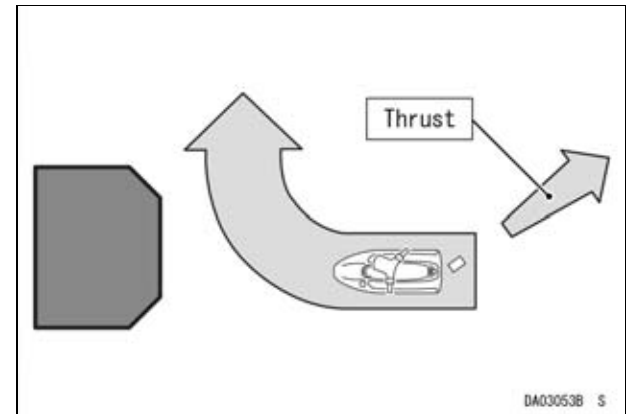

18 SAFETY INFORMATION

No Thrust = No Turn

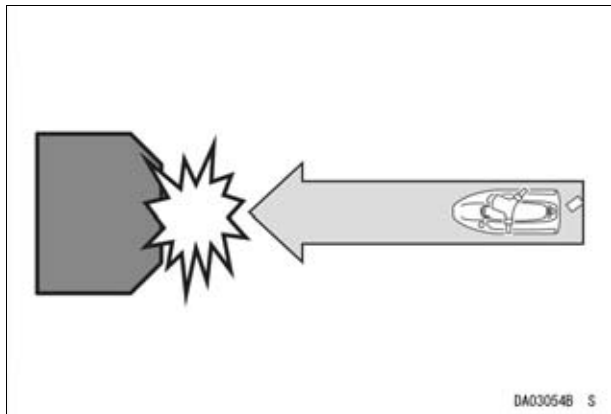


- Do not stop the engine to avoid a collision.
- If you push the stop button or remove the engine shut-off cord (lanyard) key and the engine stops, you will no longer be able to steer the watercraft.
- Ride within your skill limits. Riding too fast for your skills is one of the major causes of collisions.
- Overspeed is one of the major causes of collisions.
- Unskilled operators should use the Smart Learning Operation (SLO) mode, which reduces the maximum watercraft speed.

 Important. Read this carefully.

Ventilate Engine Compartment

- Open the engine compartment to ventilate it before starting the engine. A concentration of gasoline fumes can cause a fire or explosion. Do not start the engine if there is a fuel leak or gasoline fumes.
- Before each ride, and after refueling or transportation, ventilate the engine compartment for several minutes with the storage compartment lid open and the seats removed.

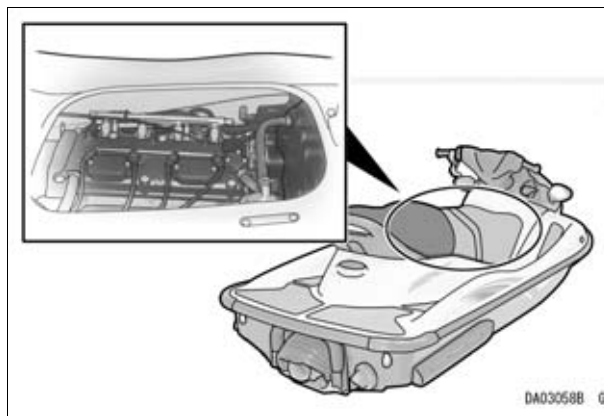


 Important. Read this carefully.

Keep Your Watercraft in Safe Condition

Pre-Ride Check

- Check the throttle lever and steering system for proper operation before riding the watercraft.

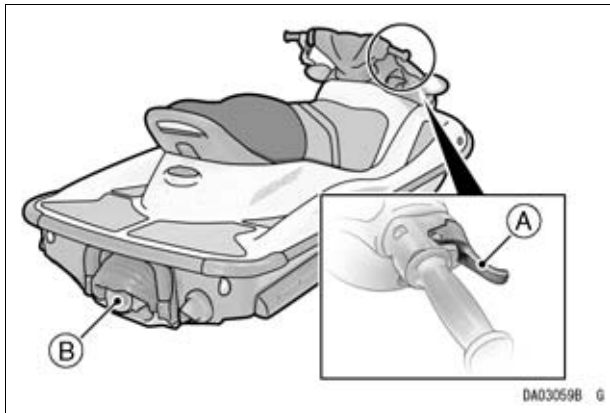

A. Throttle Lever

B. Steering (Steering Nozzle, Jet Nozzle)

- Check the battery, fuel, oil and other items in the Pre-Ride Checklist of this owner's manual.

Regular Maintenance / Modification

- Maintain your watercraft for safe operation by carrying out all maintenance items in the MAINTENANCE AND ADJUSTMENTS section of this owner's manual.
- Modifications to your watercraft may affect its stability or handling, and result in an unsafe riding

SAFETY INFORMATION 19

condition or illegal condition for use. Do not use non-Kawasaki Parts and Accessories on your watercraft.

Never Operate after Dark

- Do not operate the watercraft after dark. It is not designed for night use, and has no lighting equipment.

 Important. Read this carefully.

Follow Rules

- Follow all navigation rules and state and local laws that apply to PWCs.

 Important. Read this carefully.

This page intentionally left blank.

22 SAFETY INFORMATION


Label Location

All warning labels on the vehicle are repeated here. Read the labels and understand them thoroughly. They contain information that is important for your safety and the safety of anyone else who may operate your vehicle. Therefore, it is very important that all warning labels be on your vehicle in the locations shown. If any label is missing, damaged, or worn, get a replacement from your Kawasaki dealer and install it in the correct position.


NOTE

○ *The sample warning labels in this section have part numbers to help you obtain the correct replacement.*

 Important. Read this carefully.

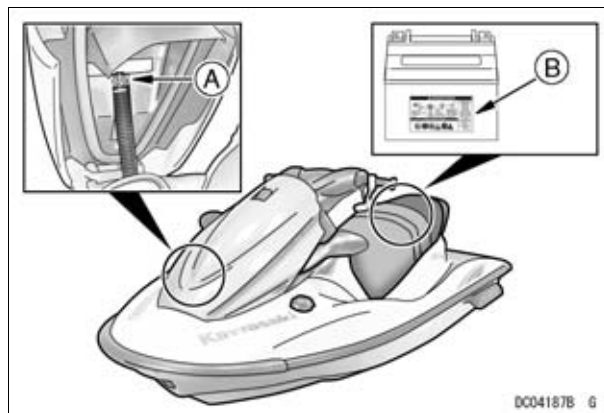

(A) WARNING - Contains pressurized gas. Do not incinerate, puncture or open.

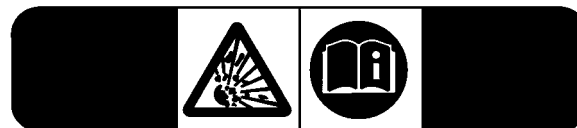

56071-0370

DC05739B S


 Important. Read this carefully.

(B) Battery Danger/Poison

 DANGER/POISON				
 SHIELD EYES EXPLOSIVE GASES CAN CAUSE BLINDNESS OR INJURY.	 NO • SPARKS • FLAMES • SMOKING	 SULFURIC ACID CAN CAUSE BLINDNESS OR SEVERE BURNS.	 FLUSH EYES IMMEDIATELY WITH WATER. GET MEDICAL HELP FAST.	PROPOSITION 65 WARNING BATTERY POSTS, TERMINALS, AND RELATED ACCESSORIES CONTAIN LEAD AND LEAD COMPOUNDS, CHEMICALS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND REPRODUCTIVE HARM. BATTERIES ALSO CONTAIN OTHER CHEMICALS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER. WASH HANDS AFTER HANDLING. SPSYMBWPD
KEEP OUT OF REACH OF CHILDREN				
      				


BD03107C S

24 SAFETY INFORMATION

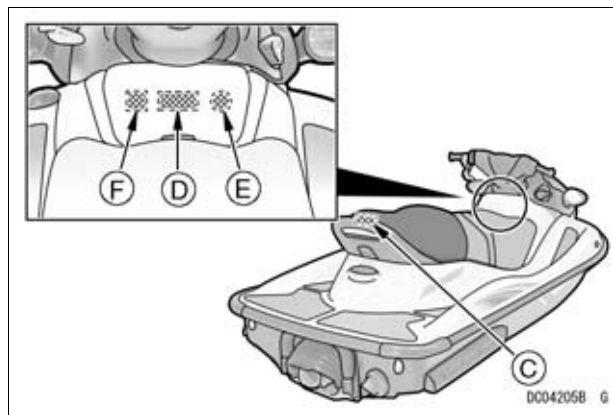

 Important. Read this carefully.


(C)

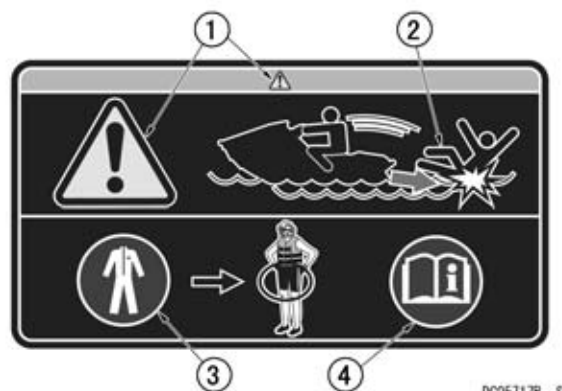

1. Safety alert symbols
2. Severe internal injuries can occur if water is forced into body cavities as a result of falling into water or being near jet thrust nozzle.
3. Wear protective clothing
 - Normal swimwear does not adequately protect against forceful water entry into rectum or vagina.
 - All riders must wear a wet suit bottom or clothing that provides equivalent protection.
4. Read Owner's Manual.

 Important. Read this carefully.

(D) WARNING - Read Owner's manual



56071-0371

DC05622B S

Read owner's manual before operating this watercraft.

It contains important information on safe operation of this watercraft.

(E) Instruction - Wear swimvest



56070-3796

DC05629B S

Swimvest must be worn by operator and passenger.

 SAFETY INFORMATION 25

(F) Instruction - Attatch lanyard




56070-3798


DC05630B S

Keep the engine shut-off lanyard attached to the operator at all times while operating the boat. If operator falls off boat with engine shut-off lanyard unattached, the boat will not stop. This could cause the operator to become stranded in the water, and/or the boat to hit another boat or person.

26 SAFETY INFORMATION

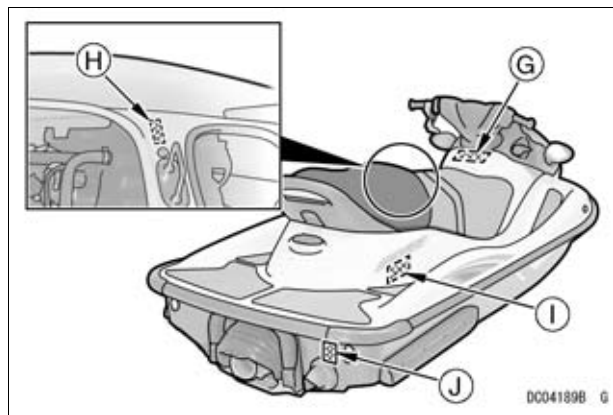

(G)

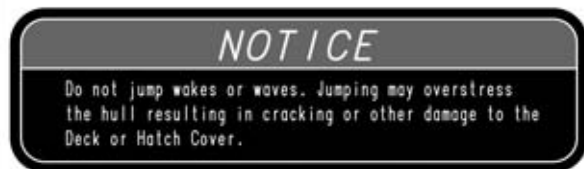

56071-0395

DC05709B S


 Important. Read this carefully.

(H) Manufacture

MFD. BY KAWASAKI MOTORS MFG. CORP., U.S.A.

DC05525BN6 G

(I)

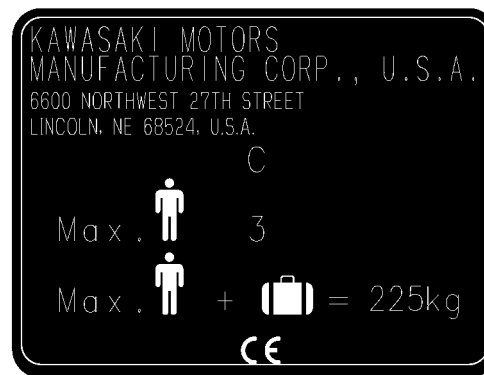


DC04209B S

- Manufacturer's Name
- Boat Design Category
- Maximum Number of Persons
- Maximum Load Capacity (including riders and cargo)
- Model Name
- CE Marking

 Important. Read this carefully.


(J) Righting the Capsized Watercraft, see page 90

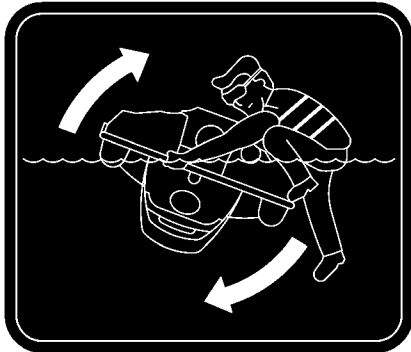

56070-3987


DC05718B S

28 SAFETY INFORMATION

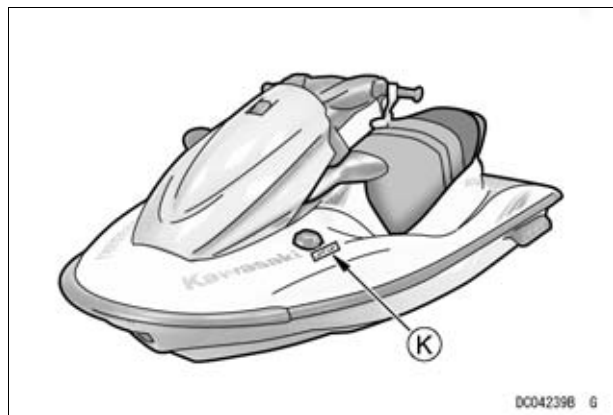

 Important. Read this carefully.

(K)

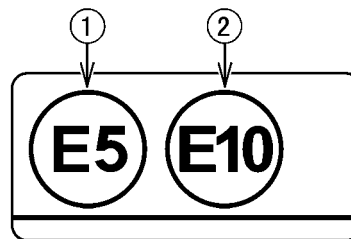

56033-0986 DC05760B S

Use fuel identified by either of the above symbols.

1. Gasoline containing up to 5% ethanol by volume
2. Gasoline containing up to 10% ethanol by volume

See page 47.


PREVENT MAJOR DAMAGE

NOTICE

Certain conditions can cause major damage to your watercraft that is costly to repair. To avoid these conditions carefully read the following section and follow the recommendations to help prevent major damage to your watercraft.

Tilting the Watercraft


- Tilting the watercraft to its STARBOARD side can cause water in the exhaust system to run into the engine, with possible engine damage. Always tilt the boat on its PORT side if it is necessary to inspect the bottom of the craft .

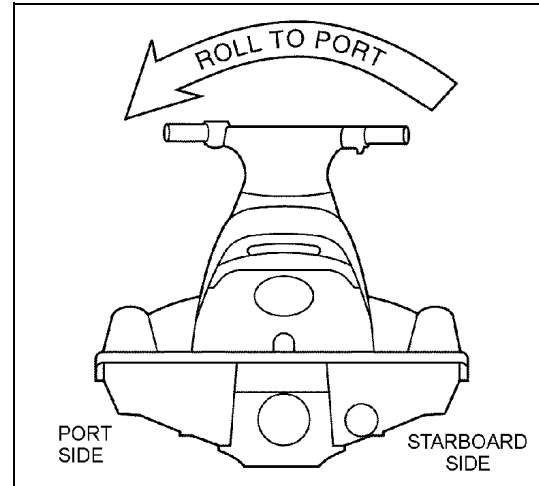

30 PREVENT MAJOR DAMAGE


Righting Capsized Watercraft

- Rolling the capsized watercraft counterclockwise (to its STARBOARD side) can cause water in the exhaust system to run into the engine, with possible engine damage. Always turn the capsized boat clockwise so that the PORT side always faces downward.
- For details on righting, refer to Righting the Capsized Watercraft section in the OPERATING INSTRUCTIONS chapter.

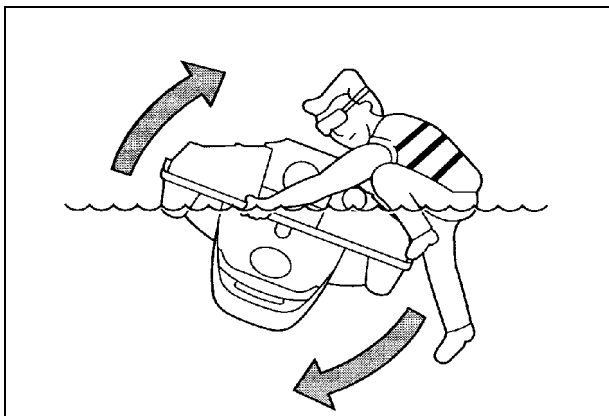

Shallow Water

- When starting the engine or riding, the watercraft must be in water at least 0.8 m (2.6 ft) deep. Sand or debris from the bottom may be drawn into the jet pump and damage the pump and impeller, and possibly clog cooling lines.

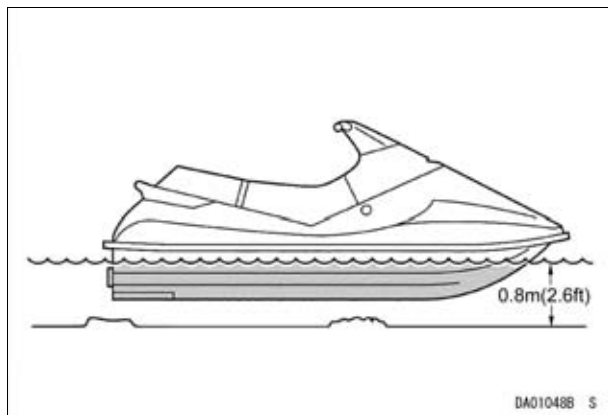

- If operating in shallow or debris-laden water, objects or sand from the bottom can get sucked in damaging the impeller and possibly clogging cooling hoses which can cause severe engine damage from overheating.
- Avoid beaching the watercraft. Stones and sand can scratch the hull and be drawn into the jet pump, causing damage to the impeller.

Wave Jumping

- Jumping waves can overstress the watercraft hull and cause it to crack. To prevent hull cracks, do not jump waves.

After daily riding

- Since JET SKI watercraft are not designed to be docked in water for extended periods, prolonged immersion will cause the hull paint to bubble and peel, as well as electrolytic erosion of some metal parts in the jet pump. To prevent this damage and electrolytic erosion, remove your JET SKI watercraft from the water at the end of each day's use; do not leave it in the water overnight. Your JET SKI watercraft will last longer and look better if you do this.


32 PREVENT MAJOR DAMAGE

Jet Pump and Seals Periodic Maintenance


- The jet pump bearings and seals require periodic service. Major engine damage can occur if the jet pump bearings fail due to lack of maintenance. Have your Kawasaki dealer inspect the jet pump bearings and seals after the first 25 hours of use or after one year, whichever comes first; and then every 50 hours or every year, whichever comes first. The jet pump bearings should also be serviced before any prolonged storage to prevent any water that may be left in the pump from corroding the bearings and causing premature failure.

GENERAL INFORMATION

Parts Location

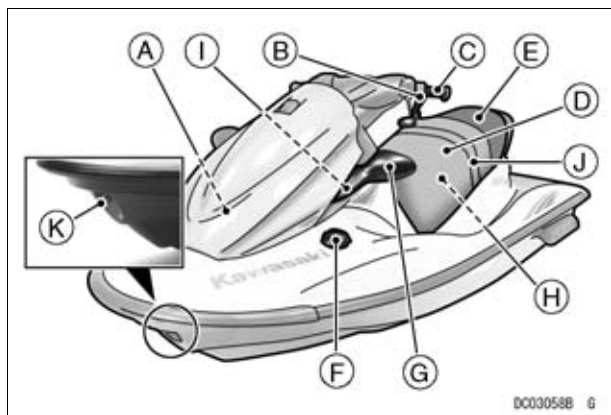


- A. Front Storage Case
- B. Engine Shut-off Lanyard
- C. Handlebars
- D. Front Seat
- E. Rear Seat
- F. Fuel Filler Cap
- G. Rear View Mirrors
- H. Engine Compartment
- I. Water Supply Inlet Fitting (inside hatch cover)
- J. Hand Strap
- K. Bow Eye

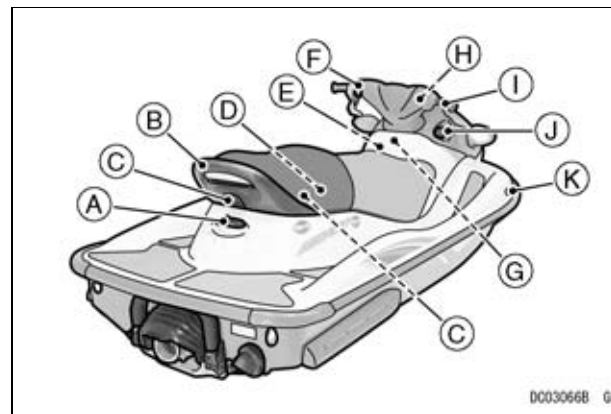


- A. Ski Tow Hook
- B. Handrail
- C. Seat Latch
- D. Rear Storage Case
- E. Center Storage Case
- F. Engine Start/Stop Button
- G. Ignition Switch
- H. Multifunction Meter
- I. Throttle Lever
- J. Shift Lever
- K. Bypass Outlet


34 GENERAL INFORMATION

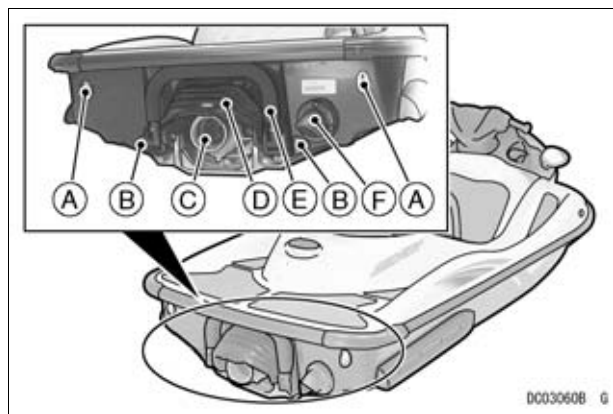

- A. Stern Eyes
- B. Drain Screws
- C. Steering Nozzle
- D. Reverse Bucket
- E. Reboarding Step
- F. Exhaust Outlet

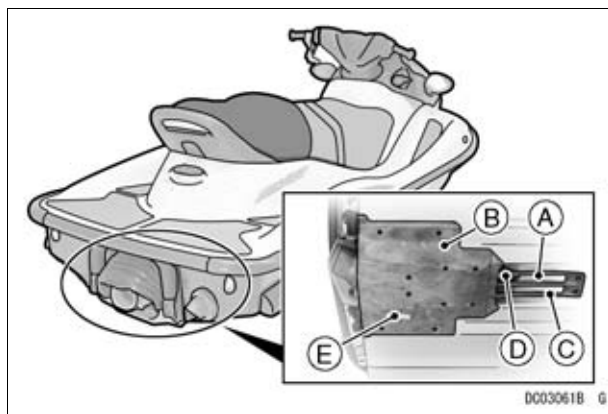

- A. Water Intake
- B. Jet Pump Cover
- C. Grate
- D. Drive Shaft
- E. Speed Sensor

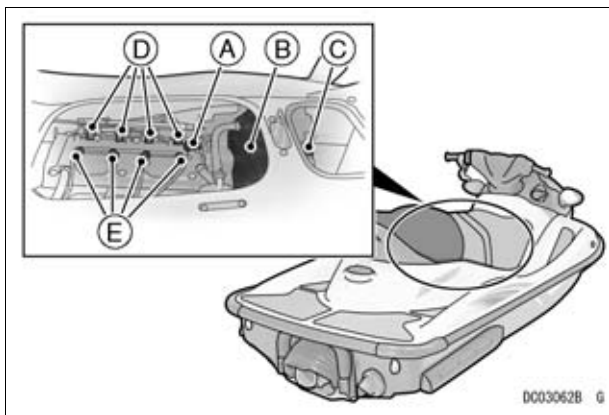

- A. Throttle Assembly
- B. Air Filter
- C. Battery
- D. Fuel Injectors
- E. Spark Plugs


Multifunction Meter

In front of the handlebars is a multifunction meter. When the ignition switch is turned on, all displays on the panel are shown; the warning indicator light is on and a buzzer will sound twice. After this self-check procedure, the meter display shows the normal readings.

NOTE

- The display will go off 3 minutes after stopping the engine using the engine stop lanyard or stop button.
- The "MODE" button operates when the engine is running slower than 3 000 rpm and the indicator (s) is not blinking.
- When the warning indicator light goes on, an intermittent buzzer sounds. This buzzer sound can be stopped by pushing either "SET" or "MODE" button.
- To turn off the blinking indicator(s), hold down either "SET" or "MODE" button for more than one second.
- Then the "MODE" button can be operated normally.

36 GENERAL INFORMATION

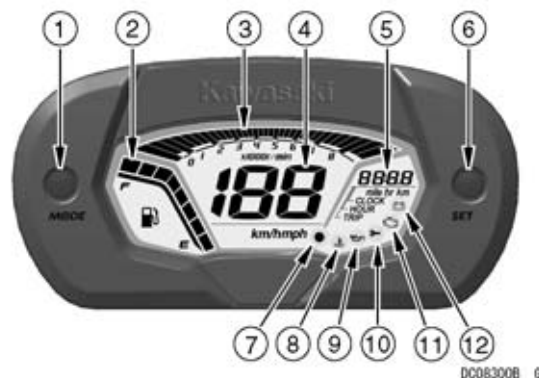

- | | |
|--------------------------|---|
| 1. "MODE" Button | 7. Red Warning Indicator Light |
| 2. Fuel Level Gauge | 8. Engine Cooling Water Temperature Indicator |
| 3. Tachometer | 9. Engine Oil Indicator |
| 4. Speedometer | 10. Immobilizer Indicator |
| 5. Multifunction Display | 11. Engine Warning Indicator |
| Clock | 12. Low Battery Voltage Indicator |
| Time/Trip/Hour Meters | |
| 6. "SET" Button | |

Speedometer

The speedometer shows the watercraft speed. During a sharp turn the speed shown can be slightly higher or lower than the actual speed by turning direction.



A. Speedometer

NOTE

- You can change the speedometer display from km/h to mph and vice-versa, see the Hour Meter section for details.
- The display range of the speed is 0 to 108 km/h (0 to 67 mph).
- If the speed exceeds 108 km/h (67 mph), the display is stopped and locked.
- When the speed is less than 3 km/h or 3 mph, the meter displays 0 km/h or 0 mph.

Tachometer

The tachometer shows the engine speed in revolutions per minute (rpm); increasing or decreasing every 500 rpm within the range of 0 – 1 000 rpm and every 250 rpm over 1 000 up to 8 500 rpm.



A. Tachometer

Multifunction Displays

The Clock, Time, Trip and Hour Meters will be displayed right side of the speedometer. Pushing the "MODE" button, shifts the display. These modes will shift in series if the "MODE" button is pressed for 2 seconds or more.


38 GENERAL INFORMATION

Clock



To adjust the clock:

1. Push the “SET” button for 2 seconds or more. The hour display starts blinking.
2. Push the “MODE” button to advance the hours.
3. Push the “SET” button. The hour display stops blinking and the minutes display starts blinking.
4. Push the “MODE” button to advance the minutes.
5. Push the “SET” button. The minutes display stops blinking and the clock starts working.

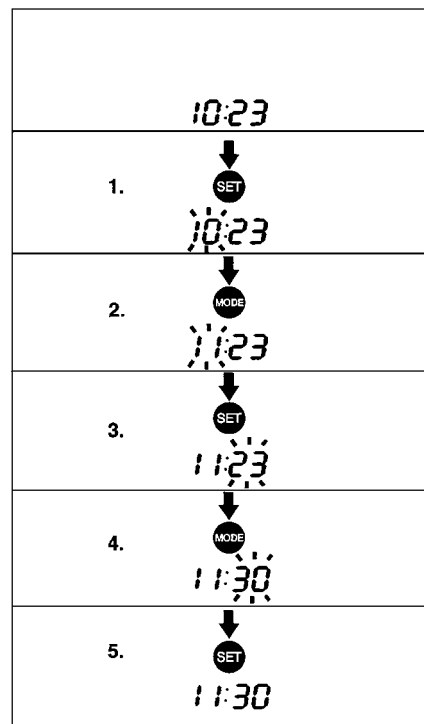

DC08008B S

NOTE

- Briefly pushing the “MODE” button advances the hours or minutes step by step. Holding the button down advances the hours or minutes continuously.

- *The clock works normally from the back-up power while the ignition switch is turned off.*
- *When the battery is disconnected, the clock resets to 12:00, and starts working again when a battery is connected.*

Time Meter

The time meter shows the time elapsed since it was last reset to zero.

To reset the time meter:

1. Push the “SET” button and hold it in. All the displays in this mode start blinking.
2. After two seconds the displays stop blinking and the hour and minute display turns back to 00:00, and then starts working, if the engine is running. The meter operates until it is reset.

NOTE

- *The data is maintained by the back-up power if the ignition switch is turned off and when the craft is operated next time, it will begin to move from there again.*
- *When the time reaches 99:59, it turns back to 00:00 and starts counting again.*
- *When the battery is disconnected, the time display resets to 00:00.*



40 GENERAL INFORMATION

Trip Meter

The trip meter shows the distance traveled since it was last reset to zero.

To reset the trip meter:

1. Push the "SET" button and hold it in. All the displays in this mode start blinking. The trip meter can be reset when the craft is stopped.
2. After two seconds the displays stop blinking and the trip meter turns to 000.0, and then starts counting when the craft is operated. The meter operates until it is reset.

NOTE

- The trip meter can be reset when the craft is stopped, it starts counting as soon as the craft starts moving.
- If the meter reaches 999.9 when the craft is running, it will reset to 000.0 and start counting again.
- When the battery is disconnected, the meter display resets to 000.0.



Hour Meter


The hour meter shows the total hours that the watercraft has been operated. This meter cannot be reset.



NOTE

- *The data is maintained even if the battery is disconnected.*
- *When the figures reach 9999, they reset to 0000 and start counting upward again when the craft is operated.*


You can change the meter unit setting by pushing the “SET” button for more than 3 seconds. The units change in the following order.

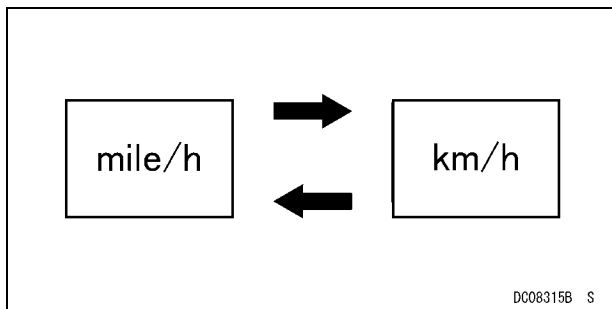

Fuel Level Gauge/“FUEL” Character/Red Warning Indicator Light

The fuel level is shown in segments. All fuel segments are displayed when the fuel tank is full. As the fuel is consumed, the segments go out accordingly. When the last segment is reached, it begins blinking. The warning indicator light goes on, “FUEL” blinks and a buzzer sounds. To stop the buzzer, press any button for more than a second. When the low fuel indicator begins blinking, 16 liters (4.2 U.S. gal) of fuel remain. Reduce speed to less than half-throttle and fill the fuel tank as soon as possible because there is no reserve tank in this watercraft (See the Fuel and Controls sections).

42 GENERAL INFORMATION

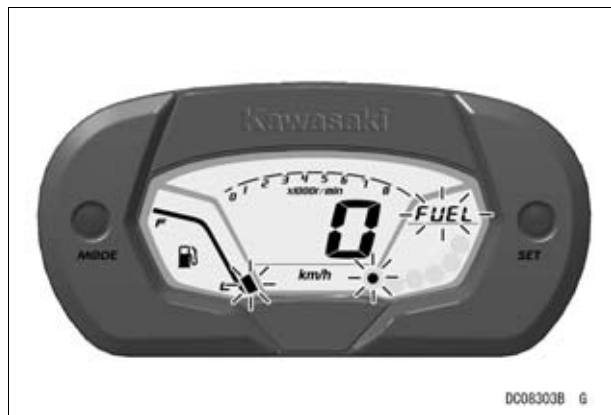


Engine Oil Indicator/"OILP" Character/Red Warning Indicator Light

The warning indicator light goes on, the engine oil indicator and "OILP" blink, and a buzzer sounds whenever the oil pressure is dangerously low. The engine speed will automatically be limited to 3 000 rpm. Return to shore immediately and fill the oil as soon as possible (See the Engine Oil section in the MAINTENANCE AND ADJUSTMENTS chapter). To stop the buzzer, press any button for more than a second.

NOTE

- The warning indicator light will remain on after the watercraft is capsized and righted if the ignition key is on.

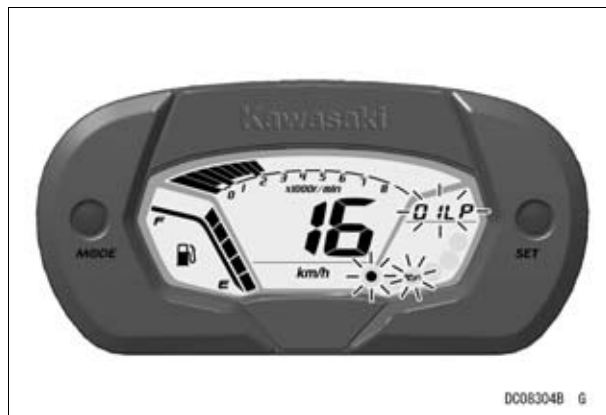


Engine Cooling Water Temperature Indicator/"HEAT" character/Red Warning Indicator Light

If the engine cooling water temperature gets too high, the warning indicator light goes on, the engine cooling water temperature indicator and "HEAT" blink, and a buzzer sounds to warn the operator. The engine speed will automatically be limited to 3 000 rpm. Return to shore immediately and check the cooling system for clogging (see the End of the Day Checklist section in the OPERATING INSTRUCTIONS chapter). To stop the buzzer, press any button for more than a second.

NOTICE

To prevent engine damage, do not operate the craft until the cause of overheating is corrected.

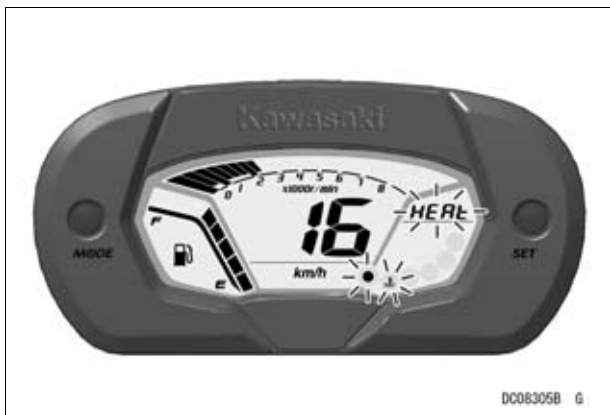

Low Battery Voltage Indicator/“bAt” Character/Red Warning Indicator Light

The warning light goes on, the low battery voltage indicator and “bAt” blink, and a buzzer sounds to warn the operator when the battery voltage is less than 11.5 volts. If the low battery voltage indicator blinks, return to shore immediately.

Remove your watercraft's battery and charge it. To stop the buzzer, press any button for more than a second.




Engine Oil Temperature Indicator/ “OILt” Character/Red Warning Indicator Light

If the engine oil temperature sensor malfunctions, the warning indicator light goes on, the engine oil indicator and “OILt” blink, and a buzzer sounds. The engine speed will automatically be limited to 3 000 rpm.

Return to shore immediately and have your authorized Kawasaki JET SKI watercraft dealer check your boat to determine the problem. To stop the buzzer, press any button for more than a second.

44 GENERAL INFORMATION

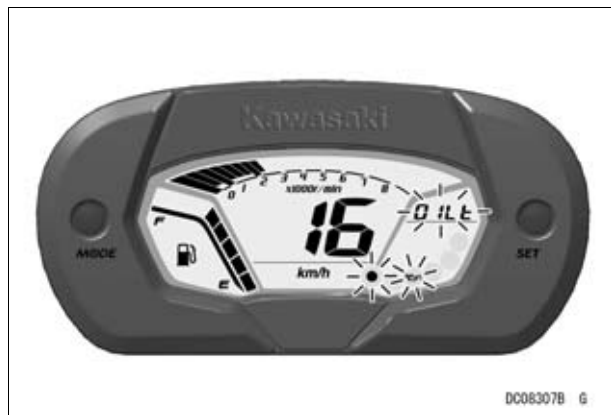


Engine Oil Overheat Indicator/“OILH” Character/Red Warning Indicator Light

If the engine oil temperature gets too high, the warning indicator light goes on and the engine oil indicator and “OILH” blink, and a buzzer sound to warn the operator.

The engine speed will automatically be limited to 3 000 rpm. Return to shore immediately and check the cooling system for clogging and engine oil level. If the cause is other than a clogged cooling system or low oil level, have your authorized Kawasaki JET SKI watercraft dealer check your boat to determine the problem (see the Troubleshooting Guide section for instances when the engine speed will automatically be limited to 3 000 rpm).

To stop the buzzer, press any button for more than a second.

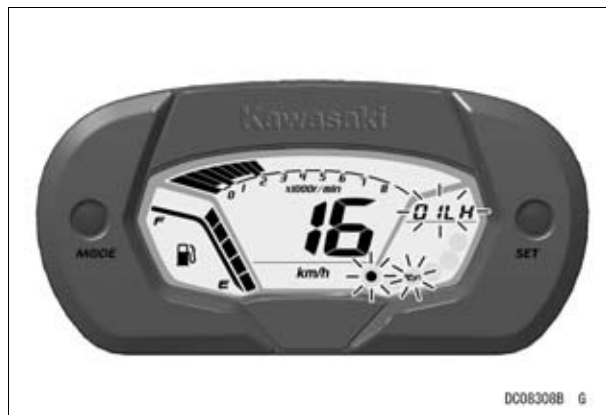


Engine Warning Indicator/“FI” Character/Red Warning Indicator Light

If the fuel-injection-related parts malfunction, the warning indicator light goes on, the engine warning indicator and “FI” blink, and a buzzer sounds to warn the operator.

Return to shore immediately and have your authorized Kawasaki JET SKI watercraft dealer check your boat to determine the problem. To stop the buzzer, press any button for more than a second.


Depending on the problem the engine speed will automatically be limited to 3 000 rpm.

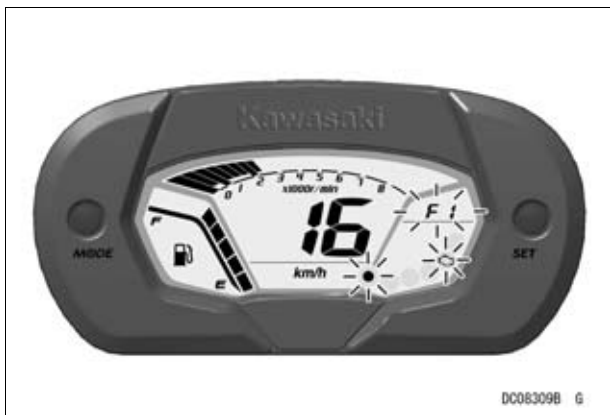

Immobilizer Amplifier Indicator/“Innb” Character/Red Warning Indicator Light

If the amplifier for the immobilizer system malfunctions, the warning indicator light, the immobilizer indicator and “Innb” blink, and a buzzer sounds. Have your authorized Kawasaki JET SKI watercraft dealer check your boat.



To stop the buzzer, press any button for more than a second.

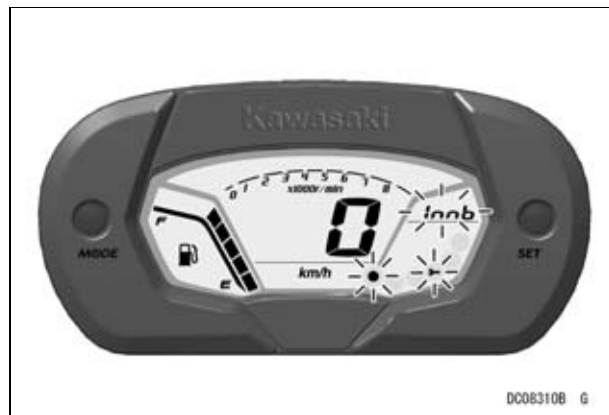

Immobilizer Key Matching Indicator/“I9nI” Character/Red Warning Indicator Light

If a key other than that registered to your watercraft is tried, the warning indicator light, the immobilizer indicator and “I9nI” blink, and a buzzer sound.

46 GENERAL INFORMATION

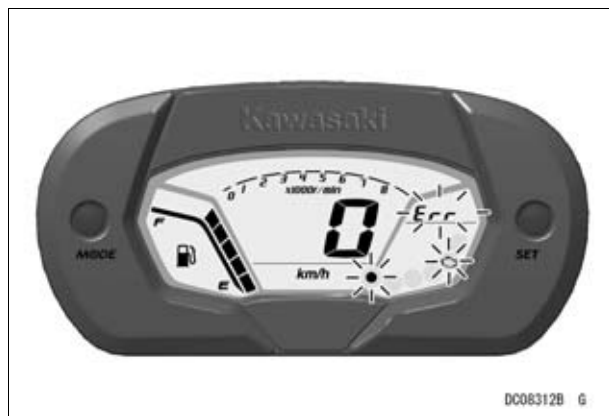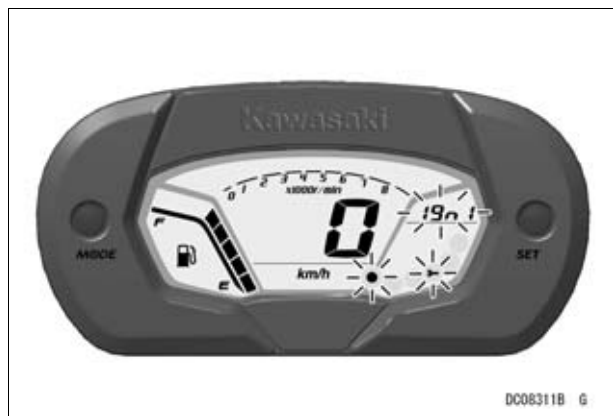

Communication Trouble Indicator/"Err" Character/Red Warning Indicator Light

If there is a communication problem between the multifunction meter and the Electronic Control Unit (ECU), the warning indicator light goes on, the engine warning indicator and "Err" blink, and a buzzer sounds. Have your authorized Kawasaki JET SKI watercraft dealer check your boat.

To stop the buzzer, press any button for more than a second.

Fuel

NOTICE

This watercraft has not been tested and certified for use with racing fuels or fuel additives. Their use may damage the engine and fuel system. Do not use race gas or fuel additives.

Fuel Requirements:

Your Kawasaki engine is designed to use only unleaded gasoline with a minimum octane rating shown below. Never use gasoline with an octane rating lower than the minimum specified by Kawasaki to prevent severe engine damage.

The octane rating of a gasoline is a measure of its resistance to detonation or "knocking". The term commonly used to describe a gasoline's octane rating is the Research Octane Number (RON).

NOTICE

Engine "knocking" or "pinging" can lead to severe engine damage. If engine "knocking" or "pinging" occurs, use a different brand of gasoline of a higher octane rating. Gasoline quality is important. Fuels of low quality or not meeting standard industry specifications may result in unsatisfactory performance. Operating problems that result from the use of poor quality or nonrecommended fuel may not be covered under your warranty.

Fuel Type and Octane Rating

Use clean, fresh unleaded gasoline and an octane rating equal to or higher than that shown in the table.

Fuel Type	Unleaded Gasoline
Ethanol Content	E10 or less
Minimum Octane Rating	Research Octane Number (RON) 91

48 GENERAL INFORMATION


NOTICE

Damage to the engine and fuel system, or engine starting and/or performance problems may result from the use of improper fuel. Do not use any fuel that contains more ethanol or other oxygenates than specified for E10 fuel* in this vehicle.

*E10 means fuel containing up to 10% ethanol as specified by European directive.

Filling the Tank:

Avoid filling the tank in the rain or where heavy dust is blowing so that the fuel does not get contaminated.

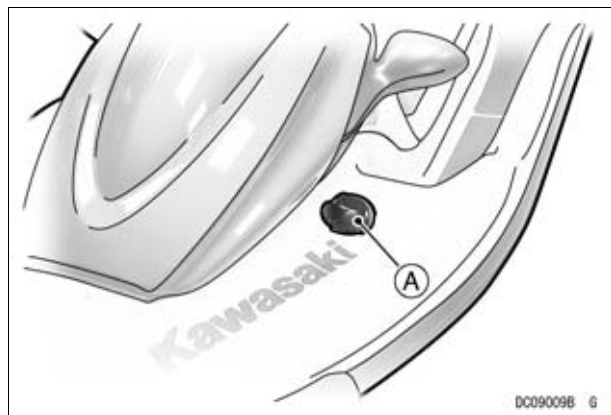

A. Fuel Filler Cap

Open the storage compartment lid to observe the fuel level in the fuel tank.

Fill the tank with the recommended octane rating gasoline. The use of a small diameter pour spout (or funnel) will make filling easier. Pour slowly to avoid "spit back" and allow air to escape from the tank.

⚠ WARNING


Gasoline is extremely flammable and can be explosive under certain conditions. Pull the lanyard key off the stop button. Do not smoke. Make sure the area is well ventilated and free from any source of flame or sparks; this includes any appliance with a pilot light. Never fill the tank so the fuel level rises into the filler neck. If the tank is overfilled, heat may cause the fuel to expand and overflow through the vents in the tank cap. After refueling, make sure the fuel tank cap is closed securely. If gasoline is spilled on the fuel tank, wipe it off immediately.

⚠ WARNING

Gasoline is extremely flammable and can be explosive under certain conditions. To avoid a possible fire or explosion never fill the tank completely to the top. As the fuel expands in a warm tank, it may overflow from the vent tube. After refueling, make sure the filler cap is closed securely.

NOTICE

Gasoline spilled on the watercraft may cause paint fading or damage. To prevent damaging the finish, be extra careful not to spill fuel during refueling.

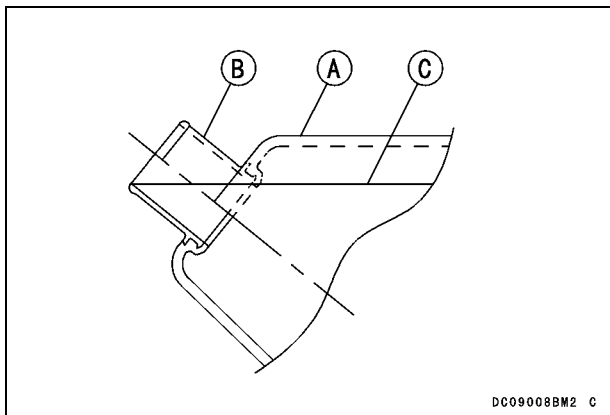

- A. Fuel Tank**
- B. Filler Neck**
- C. Top Level**

After transporting or refueling and before starting the engine, open the storage compartment lid, remove the seats (see the Seat Latch section) and take out the storage pocket for several minutes to ventilate the engine compartment.

Ignition Switch

The ignition switch is located in the center storage case.

This watercraft is equipped with two kinds of ignition keys, one of that controls the watercraft speed for the unskilled (Smart Learning Operation Mode (SLO)) and the other for normal operation (Full Power Operation Mode (FPO)).

These keys are equipped with an immobilizer system to protect your watercraft from theft.

SLO/FPO Modes


Depending on his/her skill, the rider can choose either Smart Learning Operation Mode (SLO), which reduces the maximum watercraft speed, or ordinary Full Power Operation Mode (FPO).

50 GENERAL INFORMATION

Keys are color-coded.

FPO is green.

SLO is yellow and marked SLO.

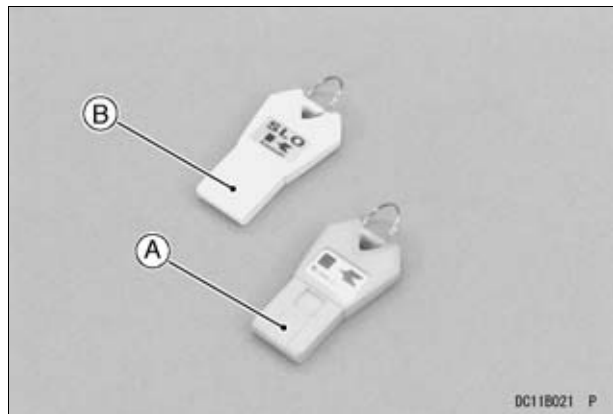


A. FPO Key (Full Power Operation Mode: green-colored)

B. SLO Key (Smart Learning Operation Mode: yellow-colored and marked SLO)


NOTE

- The ignition key is buoyant but if attached to an accessory or accessories that are heavier than water, it could sink. Do not attach an accessory or accessories to the ignition key that will not float in water.

When FPO key is inserted, the multifunction meter will show the following display.

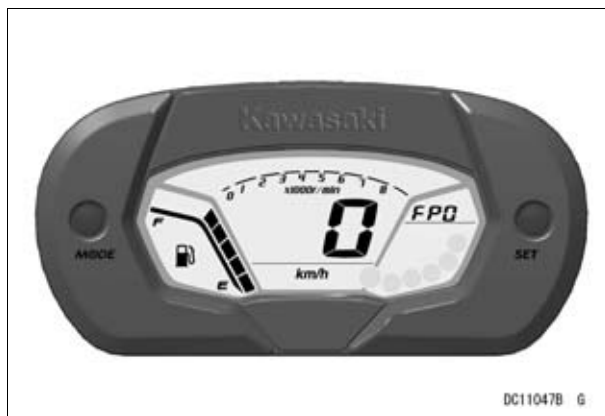

And when SLO key is inserted:

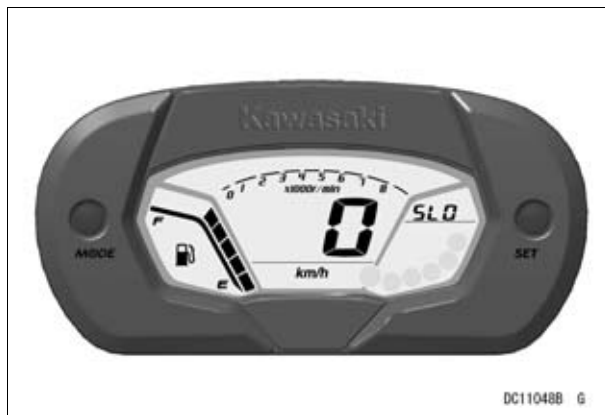

Smart Learning Operation mode (SLO)

This watercraft is equipped with SLO, which reduces the maximum watercraft speed by approximately 30 percent.

SLO mode is displayed on the meter as SLO, whereas the non-restricted ordinary mode is displayed as FPO.

In SLO mode, all the functions of the multifunction meter remain the same as the ordinary FPO mode.

To switch from FPO mode to SLO and vice versa, stop the engine and replace the ignition key from FPO to SLO and vice versa.

You should become familiar with the SLO mode so that you can assist others in understanding how it works.


NOTE

- When shifted to the SLO mode, the initial display, as shown when the ignition switch is turned on, is shown and a buzzer sounds.
- Then, "SLO" blinks every three seconds.
- When shifting to the normal operation mode (FPO), the same initial display is shown and a buzzer sounds followed by "FPO" for two seconds. However, "FPO" is shown only once and is not displayed thereafter.
- Under the SLO mode, all the meter displays and other functions work in the same manner as the normal operation (Full Power Operation, FPO) mode.

How to use the Immobilizer-function keys

Insert either the SLO or FPO key into the key slot in the center storage case and press the key further in. The ECU (electronic control unit) verifies the code of the immobilizer key and if the ECU recognizes the key, the warning indicator light goes on and a buzzer sounds and the initial display will be shown on the multifunction meter.

You can now start the engine.

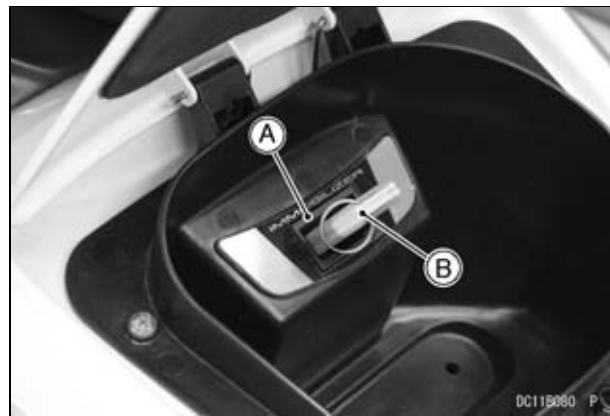

A. Key Slot
B. Immobilizer Key

NOTE

- When shifting the mode from SLO to FPO and vice versa, be sure to stop the engine. If the engine is on, the mode cannot be shifted.
- Three minutes after the engine stops, the meter display disappears and the ignition switch is

52 GENERAL INFORMATION

turned off. When turning on the ignition switch again, press the ignition key further in.



A. Push

Be sure the key remains in the slot while riding the watercraft. If you lose the keys at sea you will be unable to start the engine again and may end up stranded.

Observe the following precautions to protect your immobilizer keys.

NOTICE

The keys can be damaged by excessive heat, magnetic fields, heavy objects, shocks and if the plastic cover is damaged. To prevent key damage, do not expose the keys to excessively high temperatures, place them close to magnets or under heavy items, and avoid damaging the plastic covers.

If an unregistered key is tried, an alarm sounds and a warning indicator light blinks on the multifunction meter. An alarm also sounds if the immobilizer system malfunctions. See Multifunction Meter section in this chapter.

NOTE

○ Since the immobilizer system uses an electric wave for communication, keep away from other sources of electricity to prevent key identification errors.

Whenever the watercraft is not in use, be sure to remove the key from the key slot to prevent unauthorized use.

Lost Keys

If you lose a key, contact a Kawasaki dealer to obtain a new one. Take the watercraft to the dealer to have the new key registered to the ECU. You need at least one registered key to have a new key registered to the ECU. If you lose both registered keys,

you have to replace the ECU, so always keep a spare key in a safe place.

NOTE


- *There is a limit to the number of keys that can be registered to the ECU.*

EC Directive Compliance

This Immobilizer system is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC

Controls

Handlebars

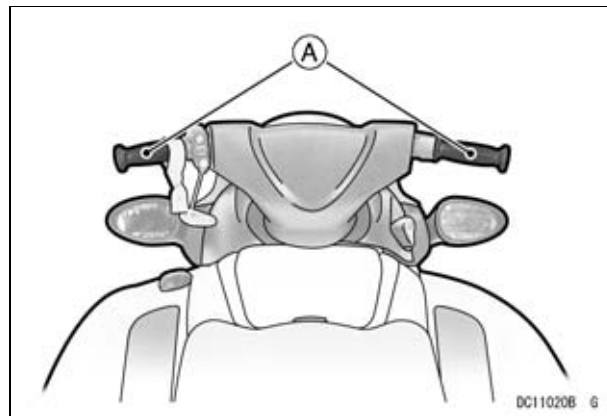

A. Handlebars

The handlebar allow the rider to steer the watercraft. It will turn **ONLY WHEN THE ENGINE IS RUNNING AND ONLY WHEN THE THROTTLE IS APPLIED**. The handlebars are connected by a control cable to the jet pump steering nozzle at the rear of the boat.


Kawasaki Smart Steering™ (KSS™)

Your JET SKI watercraft can turn under certain conditions when the throttle is released. There must be thrust at the jet nozzle to initiate and complete turns. This is a supplemental steering system which

54 GENERAL INFORMATION

assists operators in learning to negotiate turns and maneuver.

Your JET SKI watercraft continuously detects the operator's steering input as well as boat speed. When the throttle is released while boat speed is high and a turn is initiated, your JET SKI watercraft automatically increases engine speed to provide additional thrust. The system does not work when the engine is off or boat speed is low.

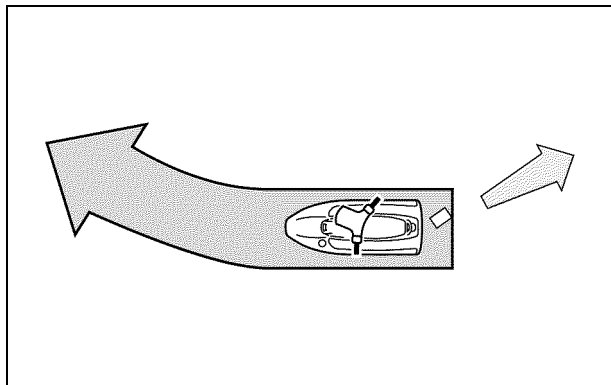

Important Information

When you make an emergency maneuver YOU MUST HAVE THRUST TO TURN, so keep the throttle on or apply throttle as needed to maintain thrust.

You can turn quicker by applying the throttle as needed and not relying upon KSS. The system functions when all of these conditions are present:

- engine speed averages more than 3 000 RPM for a specified time

- the throttle is released completely
- and the handlebars are held fully to the left or right.

Important Information for Handlebar Cover

The fuel tank vent hose is routed in the handlebar cover and improper installation of the handlebar cover can allow the vent hose to be kinked, pinched or plugged creating the possibility of a fuel leak resulting in fire or explosion.

WARNING

Gasoline is extremely flammable and can be explosive under certain conditions. Improper installation of the handlebar cover can allow the fuel tank vent hose to be kinked, pinched, or plugged creating the possibility of a fuel leak resulting in fire or explosion. To avoid a possible fire or explosion, See your authorized Kawasaki JET SKI watercraft dealer, if you must remove/install the handlebar or handlebar cover.

Stop Button


The stop button is in the case on the left hand side of the handlebars. It is red and marked “STOP.” Pushing the stop button turns off the engine.

The engine is also stopped by pulling the engine shut-off lanyard key off the stop button.

After riding, remove the engine shut-off lanyard key from the watercraft to avoid unauthorized use by children or others.

Engine Shut-off Lanyard Key

- Keep the engine shut-off lanyard key attached to the operator's left wrist.
- Insert the engine shut-off lanyard key to the stop button before starting the engine.
- The engine stops automatically when the lanyard is removed.

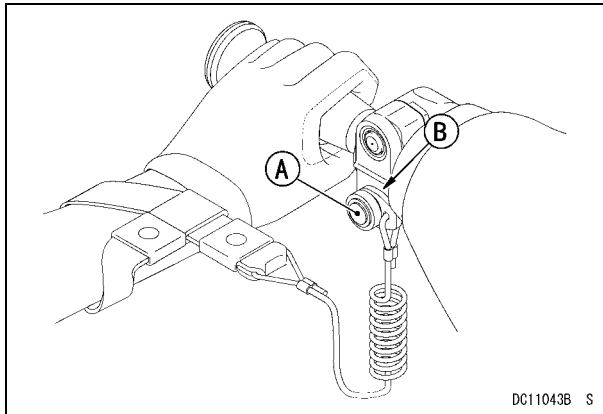

A. Stop Button
B. Lanyard Key

- After riding, remove the engine shut-off lanyard key from PWC to avoid unauthorized use by children or others.

NOTE

- For the engine to start, the ignition key must be inserted and the engine shut-off lanyard key must be pushed under the stop button.

Start Button

The start button is in the case on the left hand side of the handlebars. It is green and is marked "START." Pushing the start button with the engine shut-off lanyard key pushed under the stop button starts the engine. Release it when the engine starts.


NOTICE

Do not push the "START" button while the engine is running or while the starter is still spinning as this causes premature starter wear and may cause it to jam.

NOTE

- For the engine to start, the ignition key must be inserted and the engine shut-off lanyard key must be pushed under the stop button.
- Refer to the Starting the Engine section in the Operating Instructions chapter.


56 GENERAL INFORMATION

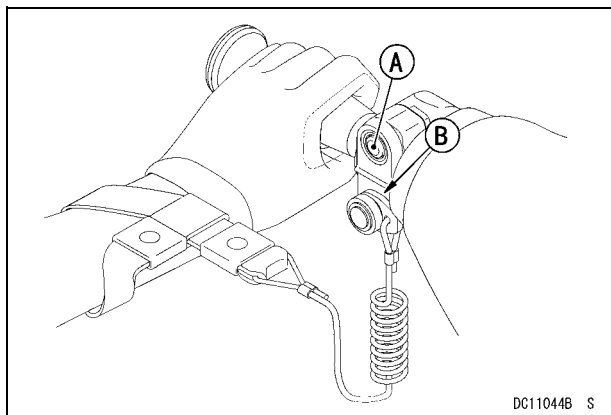

A. Start Button
B. Lanyard Key

Throttle Lever


The throttle lever is located on the right handlebar grip. Squeezing the lever towards the handlebar grip increases engine speed. When released, spring pressure returns the lever to the idle position. Always check that the throttle lever returns normally before starting the engine. In addition, there must be adequate throttle cable play. Refer to the MAINTENANCE AND ADJUSTMENTS chapter for the throttle cable adjustment procedure.

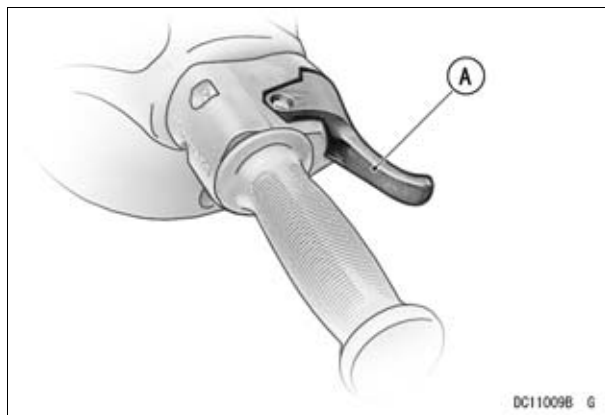

A. Throttle Lever

Shift Lever

The shift lever is located on the right side of the deck under the handlebars and has two positions: "F" (Forward) and "R" (Reverse).

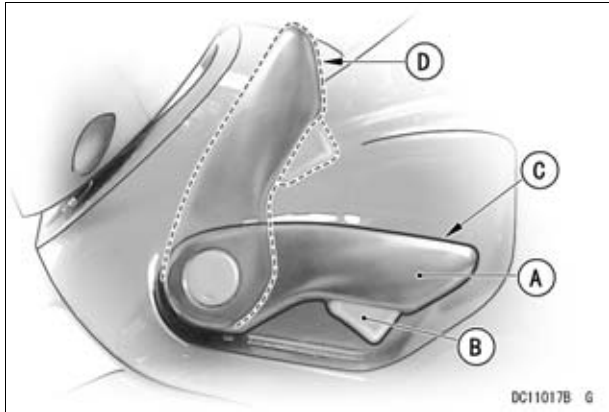

- A. Shift Lever**
- B. Trigger**
- C. "F" (Forward) position**
- D. "R" (Reverse) position**

To shift into Reverse from Forward, squeeze the trigger on the lever while pulling the lever all the way up.

To shift into Forward, squeeze the trigger while pushing the lever all the way down.

Be sure to allow the watercraft to slow down before shifting from Forward to Reverse.

⚠ WARNING

Suddenly shifting into reverse at high speed can cause the bow to suddenly dive into the water, throwing the occupants forward which can cause severe injury. Do not shift into reverse while going forward and do not use reverse as a brake. Slow the watercraft to a stop and alert any passengers before shifting to reverse.

Refer to the Operating the JET SKI Watercraft in Reverse section in the OPERATING INSTRUCTIONS chapter.

58 GENERAL INFORMATION


Seat Latches

There are two individual seats that can be unlocked using the latch under the rear of each seat. Remove the rear seat first.


The procedure to open and close is the same for both seats.

To Open: Pull the latch handle and pull the seat up and to the rear.

To Close: Position the front of the seat in place, slide it all the way forward and then push down on the rear of the seat to lock it.

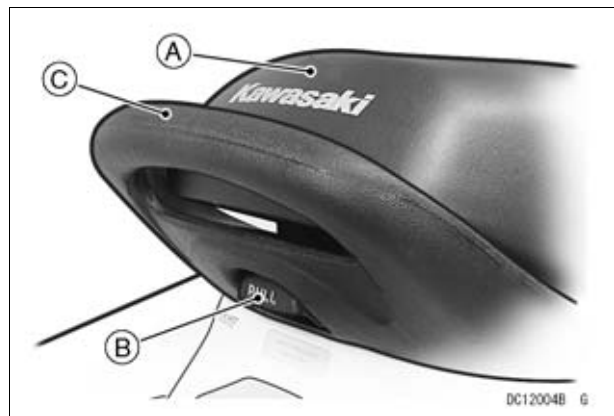

- A. Rear Seat
- B. Latch Handle
- C. Handrail

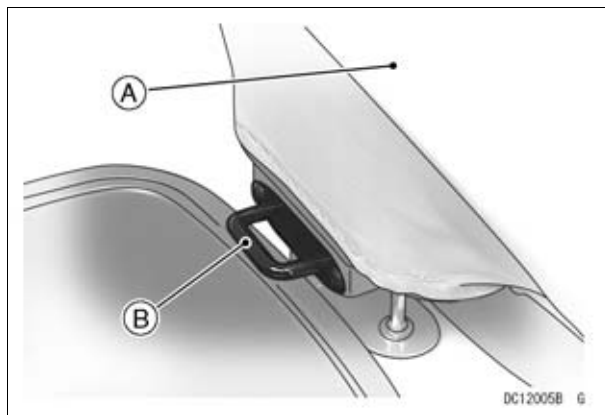

- A. Front Seat
- B. Latch Handle

- When transporting the watercraft, make sure the seats are secured to prevent them from becoming dislodged and damaged or lost.

NOTE


- Check that the seat latch is locked securely before you board the watercraft.

Storage Compartment


The box type storage case is located in the bow. Store this Owner's Manual there in a plastic bag.

To open the lid, pull the knob and raise the lid all the way up.

To close the lid, push on it near the knob until it latches.

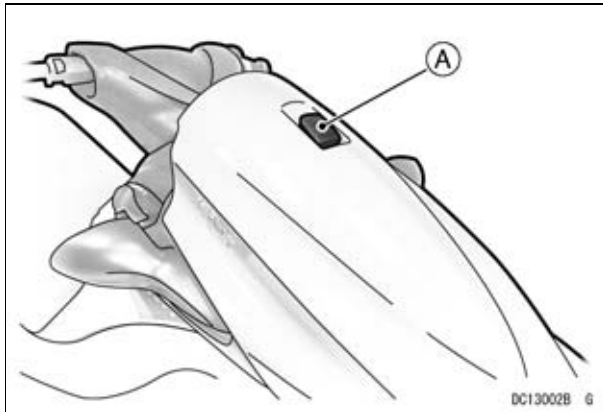

A. Knob

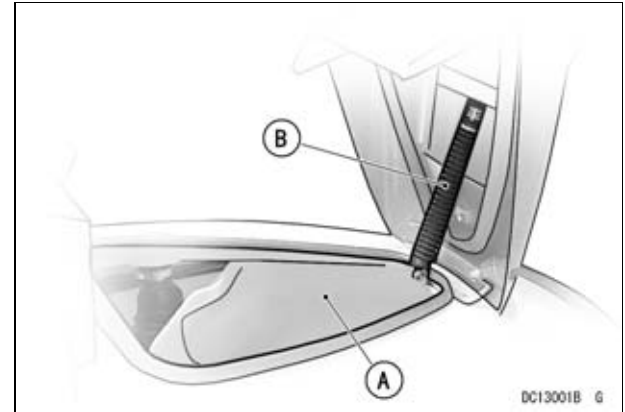

A. Front Storage Case
B. Damper

⚠ WARNING

Storing fuel in the front storage compartment can cause a fire or explosion that can result in injury or death. Do not store fuel or other flammable liquids in this unventilated compartment.


NOTE

- *Make sure the storage compartment lid is properly secured before riding the watercraft.*

60 GENERAL INFORMATION

Center and Rear Storage Cases


There is a center storage case in front of the seat. The ignition switch is inside this case. To open the lid, pull the knob. To close the lid, push the knob until it latches.

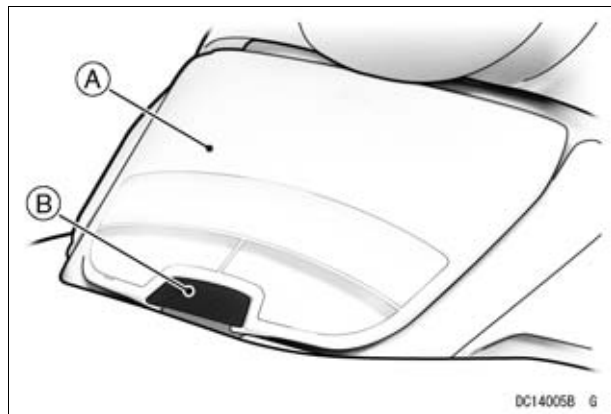

A. Center Storage Case
B. Knob

The box type rear storage case is located under the rear seat. Only keep light items in these storage cases.


A container for a fire extinguisher is attached to the storage case. (A fire extinguisher is not standard equipment with this watercraft.)

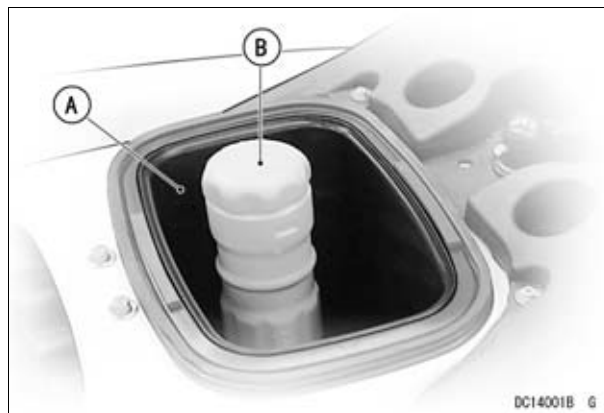

A. Rear Storage Case
B. Fire Extinguisher

Tool Kit

The tool kit container is stored at the back of the rear seat. Unhook the rubber straps to remove the tool kit.

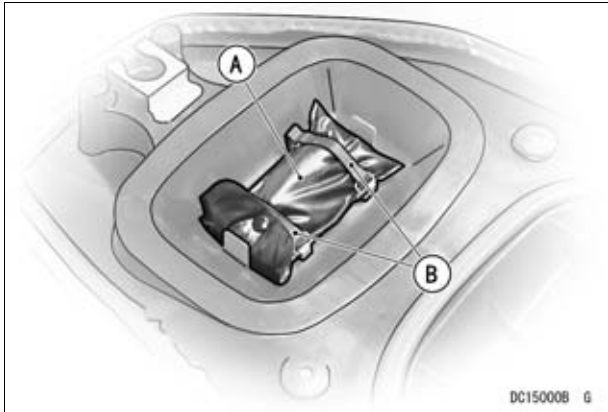

- A. Tool Kit
- B. Rubber Straps

Bilge Systems

This watercraft has a jet vacuum drainage system at the rear end of the engine compartment. This system utilizes the water jet for propulsion to drain the bilge in the engine compartment. This system only works when the engine is running on water.

NOTICE

Check that the bilge system is working at regular intervals according to the Periodic Maintenance Chart. Refer to the **MAINTENANCE AND ADJUSTMENTS** chapter. Clear debris from the pump intakes.

⚠ WARNING

Damage to the hull may cause a leak and the capacity of the bilge pumping system is not designed to drain the hull in such instances. To avoid sinking the watercraft, immediately return to shore if the hull is damaged in any way.

NOTE

- To drain any water remaining in the bilge, remove the drain screws at the rear end when the craft is out of the water.


62 GENERAL INFORMATION

Drain Screws

There are two drain screws in the stern to drain water accumulated in the engine compartment. Open them only when the craft is out of the water.

NOTICE

If the screws come loose the craft may flood or become swamped, with the possibility of sinking or severe engine damage. To prevent swamping, be sure the screws are securely tightened before launching.

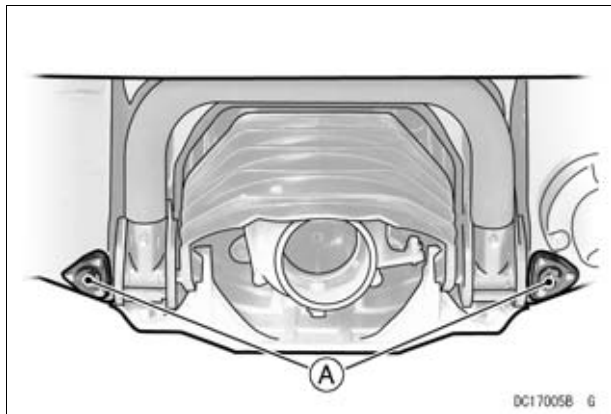

A. Drain Screws

Handrail

The handrail behind the seat is for boarding from deep water. Also, when towing a water skier, wakeboarder, or tuber, the handrail should be held by the observer who faces rearward to watch the water skier, wakeboarder, or tuber. It is not designed for any other purpose.

See the Towing (a wakeboarder, water skier, tuber, etc.) section in this chapter.

⚠ WARNING

Do not lift the watercraft using the handrail. The watercraft could fall and result in severe injury.

NOTICE

To prevent damage to the handrail and/or hull, do not use the handrail behind the seat for towing or attaching tie-downs.


Reboarding Step

The watercraft is equipped with a folding type reboarding step at the stern. When reboarding from the rear of the craft, pull the step down. It automatically raises back to the original position when released. You can reboard more easily from the water by using this step and the handrail behind the rear end of the seat (see the Launching section in the OPERATING INSTRUCTIONS chapter).

This step is designed only for reboarding from deep water, do not use it for pulling other craft.

WARNING

- Do not use the reboarding step while the engine is running.
 - Do not use the reboarding step to pull anyone or anything.
- Improper use can result in serious injury.

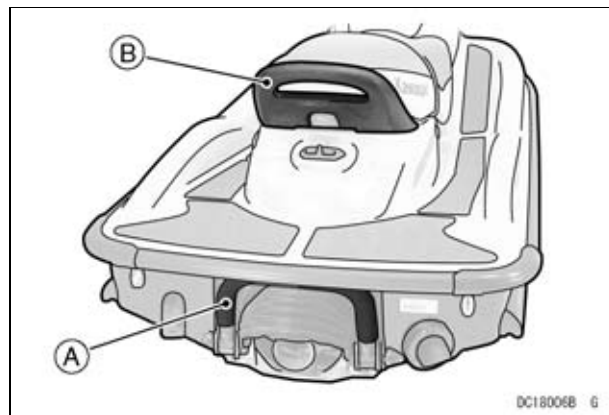

A. Reboarding Step
B. Handrail

64 GENERAL INFORMATION

Loading/Accessories/Modifications

WARNING

Incorrect loading, overloading, use of accessories and/or modification of your watercraft may affect its stability and handling and result in an unsafe riding condition. Before you ride the watercraft, make sure that it is not overloaded and that you have followed these instructions.

Maximum load

Maximum load: 225 kg (496 lb)

- Ensure the total weight of riders and luggage aboard the watercraft does not exceed the maximum load.
- Ensure the storage spaces are not overloaded.

Storage space	Load limit
Rear deck	23 kg (50 lb)
Storage pocket (front)	1.0 kg (2.2 lb)
Storage pocket (rear)	4.0 kg (8.8 lb)

Important Information

Accessories: Kawasaki has no control over the design or application of accessories. In some cases, improper installation or use of accessories, or watercraft modification, will void the warranty. Using non-

genuine accessories or modifying your watercraft may threaten your own safety and the safety of others.

NOTE

- *Kawasaki Parts and Accessories have been specially designed for use on Kawasaki watercraft. We strongly recommend that all parts and accessories you add to your watercraft be genuine Kawasaki components.*

Because a personal watercraft is sensitive to changes in weight distribution, you must take extreme care in carrying cargo, passengers and in the fitting of additional accessories. Use the following guidelines when carrying passengers and cargo.


- Passengers can affect control of the watercraft by improper positioning or sudden movements. It is important that passengers sit still while the watercraft is in motion and not interfere with its operation. Do not carry animals on your watercraft.
- Instruct any passengers before riding to hold on to the person in front of them or hand strap, and keep both feet on the deck for balance.
- Use the open storage area behind the seat for carrying cargo. Be sure that any loose items are packed in a buoyant container to prevent them from falling overboard and sinking. Loose articles or rope could fall overboard and become lodged in the intake grate or pump.
- Use a cargo net (not standard equipment with this watercraft) or other suitable tie-down straps to secure cargo on the open storage area. The hook

under the rear end of the seat and the stern eyes are also available. Do not overload the storage area, maximum cargo weight must not exceed 23 kg (50 lb).

- Make sure that the cargo will not move around while you are riding. Recheck cargo security as often as possible and adjust as necessary.
- Do not carry large or bulky items that affect visibility or your ability to control the watercraft. Do not install accessories or carry cargo that impairs the performance of the watercraft.

⚠ WARNING

**Cargo in the open storage area could interfere with reboarding by causing a loss of balance and possible injury.
Do not stack cargo in such a way that it interferes with reboarding.**

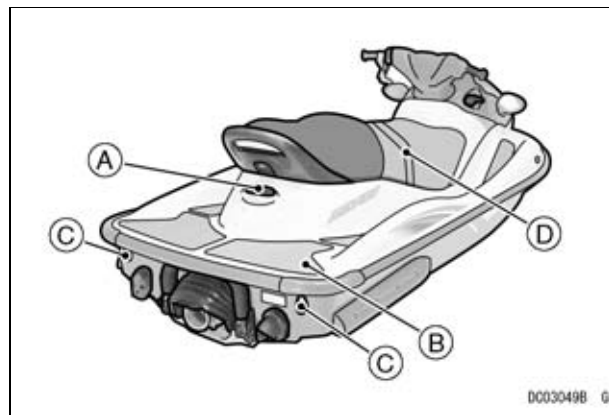

- A. Ski Tow Hook
- B. Open Storage Area
- C. Stern Eyes
- D. Hand Strap

Towing (a wakeboarder, water skier, tuber, etc.)


Towing a wakeboarder/water skier/tuber

Towing a wakeboarder, water skier, or tuber is a three-person team sport involving the watercraft operator, the backward-facing observer and the wakeboarder/skier/tuber. Everyone must know their equipment, boating laws and regulations, respective responsibilities, communication signals and the fundamentals of the sport.

WARNING

- **All riders and wakeboarders/skiers/tubers must wear a vest-type PFD (personal flotation device) and wetsuit bottom or equivalent to protect against possible injury to body cavities from forced injection of water. Normal swimwear will not provide adequate protection, possibly leading to severe injury.**
 - **Avoid collisions with other boats, fixed objects or swimmers by staying out of congested areas. Keep your watercraft at least 2.5 times the length of the tow rope away from the shore, shallow water, obstacles, etc. (at least 50 m if the tow rope is 20 m long).**
 - **To avoid serious injury, such as amputation to body parts, do not wrap the tow rope around body parts.**
 - **Your watercraft is not designed to tow any object that may float in the air while being towed. Do not use your watercraft for any such applications, or injuries may result.**
-
- Before towing, ensure that all members of the team understand the meaning of every communication signal.
 - Observe the local rules and regulations in the area where you are using the watercraft.
 - Tie the tow rope only to the ski tow hook under the rear end of the seat. Be extra careful when

towing; towing can affect the steering of your watercraft and create a hazardous situation.

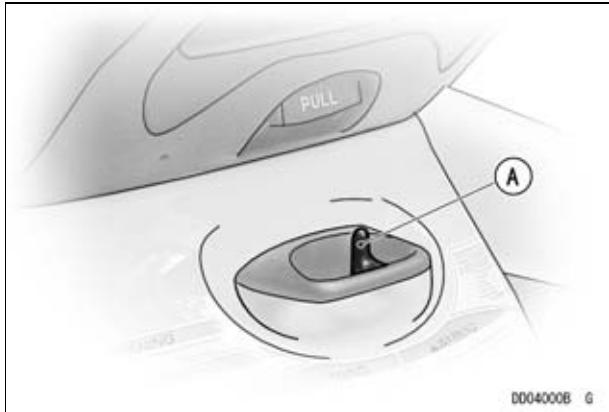

A. Ski Tow Hook

Roles of the watercraft operator

The operator is responsible for the behaviour and safety of the team.

- Towing requires good operating skills. Do not attempt to tow before you have become proficient at controlling your watercraft.
- Start off by idling ahead until the tow rope is tight. When the wakeboarder/skier/tuber signals he or she is ready, be sure the water around the watercraft is clear and gradually increase the speed to raise the wakeboarder/skier/tuber. Maintain a speed that matches the skill of the wakeboarder/skier/tuber. Avoid rapid acceleration and abrupt turns.

- If the wakeboarder/skier falls, cautiously return to him/her.
- Stop towing when any part of the body of the observer and/or wakeboarder/skier/tuber is in contact with the tow rope or when they are not in a stable position.
- Be extremely observant when towing a wakeboarder/skier/tuber. Other boat operators may not be expecting your watercraft to be pulling anything behind it. Coordinate with the observer to ensure utmost safety when towing.

Roles of the observer

The observer must keep an eye on the wakeboarder/skier/tuber, relay all signals from him/her to the operator and inform the operator immediately if he/she falls, and display the ski flag.

- The observer should firmly hold the handrail behind the seat while facing rearward to watch the wakeboarder/skier/tuber being towed.
- Before towing, check that the tow rope is not wrapped around the wakeboarder/skier/tuber, or riders.
- The observer must look after the tow rope to prevent it from entering the water intake.

Towing a personal watercraft

If your watercraft runs out of fuel, develops engine problems, or needs to be towed by another watercraft, or if your watercraft needs to tow another watercraft in similar situations, tie a tow rope to the following location(s). Use a rope which is long enough to keep 6 m or more distance between

68 GENERAL INFORMATION


towing and towed boats. Towing must be slow, not exceeding 8 km/h. Be extra careful when towing; towing can affect the steering of your watercraft and create a hazardous situation.

⚠ WARNING

Towing heavy items can make the watercraft difficult to control and result in an accident.

Towing a watercraft

- Attach the tow rope to the stern eyes.

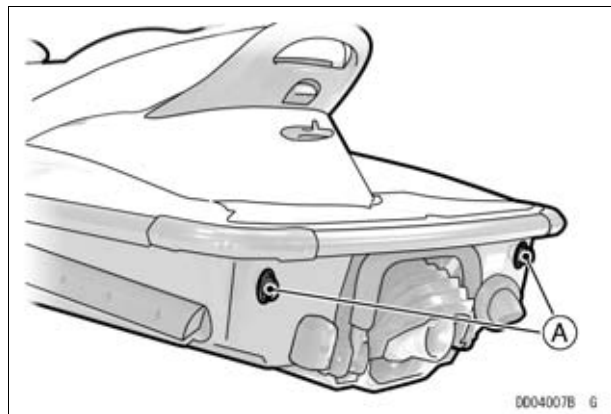

A. Stern Eyes

Being towed by a watercraft

- Attach the tow rope to the bow eye.

NOTICE

When your watercraft is being towed by another watercraft, ensure that at least one person is on board your watercraft. If it is towed with no one on board, it can tip over sideways when hit by waves, or the lighter stern can cause the heavier bow to enter waves, resulting in water entering the engine compartment and causing part of the watercraft to submerge. The rider(s) must keep the balance of the watercraft while being towed.



A. Bow Eye

- After towing, drain any water in the engine compartment and check that no water enters the engine following the procedure described in the After Submerging section.

PRE-RIDE CHECK

Each day before using the watercraft, check the following items:

WARNING

BE SURE TO PERFORM A PRE-RIDE CHECK each day before using watercraft for safety.

Check Outside Craft

- ☐ CLEAN PUMP - Clear the water intake, jet pump, and drive shaft of foreign objects.
- ☐ PUMP COVER TIGHT - Check the jet pump cover and intake grate for looseness. Tighten the mounting bolts if necessary.
- ☐ HULL DAMAGE - Inspect the hull for damage.
- ☐ DRAIN SCREWS - Check that the drain screws in the stern are securely installed.

Check Inside Craft

- ☐ STEERING - Check the operation of the steering for binding, rough spots, or excessive play. Adjust the cable if needed (see the Control Cables section in the MAINTENANCE AND ADJUSTMENTS chapter). The steering cable is sealed at both ends and does not need lubrication. If the seals are damaged, the cable must be replaced.
- ☐ SHIFT LEVER - Check the operation of the shift lever for binding, rough spots or excessive play. Adjust the cable if needed (see the Control

Cables section in the MAINTENANCE AND ADJUSTMENTS chapter).

- ☐ THROTTLE CONTROL - Check the operation of the throttle for binding, rough spots or excessive play. Adjust the cable if needed (see the Control Cables section in the MAINTENANCE AND ADJUSTMENTS chapter). The throttle lever must return to the fully closed position when released.

WARNING

A stuck throttle can cause loss of control and an accident resulting in injury or death. If the throttle does not return freely and completely, do not ride and have it inspected by your Kawasaki dealer.

- ☐ VENTILATE ENGINE COMPARTMENT - Open the front storage case lid, remove the seats and keep open for several minutes to purge gasoline fumes from the engine compartment.

WARNING

A concentration of gasoline fumes in the engine compartment can cause a fire or explosion. To prevent a fire or explosion, remove the seat to vent the engine compartment.

70 PRE-RIDE CHECK

- ❑ BATTERY TERMINALS - Check the battery terminal screws for tightness, and make sure terminal covers are in place.

WARNING

Loose battery cables can create sparks which can cause a fire or explosion resulting in injury or death. Make sure the battery terminal screws are tightened securely and the covers are installed over the terminals.

- ❑ FIRE EXTINGUISHER - Check the fire extinguisher is fully charged.
- ❑ FUEL PRESSURE - Loosen the fuel tank cap to relieve any pressure, then tighten the cap securely.
- ❑ FUEL LEVEL - Check the fuel level. Refill if necessary.
- ❑ ENGINE OIL LEVEL - Check the oil level in the engine. Refill if necessary. Refer to GENERAL INFORMATION chapter, Engine Oil section.
- ❑ FUEL LEAKS - Check the engine compartment for fuel leaks.
- ❑ OIL LEAKS - Check the engine compartment for oil leaks.
- ❑ FASTENERS - Check and tighten any loose bolts, nuts, or clamps.
- ❑ HOSE CONNECTIONS - Be sure all hose connections are secure and that all hose clamps are tight. Check all hoses for cracks or deterioration and replace if necessary.

- ❑ DRAIN BILGE - Drain any water out of the engine compartment by removing the drain screws. Install the drain screws securely when all the water has been drained.
- ❑ ENGINE SHUT-OFF LANYARD KEY - Start the engine and run it for a few seconds (see the Starting the Engine section). Pull the lanyard key off the stop button to check that the engine stops immediately.

DANGER

Exhaust gas contains carbon monoxide, a colorless, odorless poisonous gas. Inhaling carbon monoxide can cause serious brain injury or death. DO NOT run the engine in enclosed areas. Operate only in a well-ventilated area.

NOTICE

To prevent overheating resulting in engine and exhaust system damage, do not run the engine with the watercraft out of the water for more than 15 seconds at a time. Never operate the engine at maximum speed out of the water.

- ❑ STOP BUTTON - Again start the engine, run it for a few seconds, and then check that the engine "STOP" button works.
- ❑ SEATS - Check that the seat latches are secure.

- ❑ STORAGE COMPARTMENT - Check that the lid is secure.
- ❑ RIDER PROTECTION - Always wear the proper flotation device and protective gear.
- ❑ MULTIFUNCTION METER - Check the operation of the multifunction meter. See GENERAL INFORMATION chapter for details.

OPERATING INSTRUCTIONS

Basic Knowledge for Operation

Read “SAFETY INFORMATION” and “PREVENT MAJOR DAMAGE” without fail. Please be sure to conduct the PRE-RIDE CHECK before boarding.

Operation by unskilled riders

- This watercraft is equipped with the Smart Learning Operation mode (SLO), which reduces the maximum watercraft speed by approximately 30 percent.

Unskilled operators should practice operation of the craft using the SLO mode until they become more familiar with its operation.

See the Ignition Switch in the GENERAL INFORMATION chapter.

- On your first ride, familiarize yourself with the handling of the craft. Vary the engine speed with the throttle lever to get the feel of throttle influence on steering.

Operator Swimming Ability

- Riders of personal watercraft can fall into the water and experience exposure. Operator and passengers must be competent swimmers and never travel farther from shore than they can swim.

Maximum Number of Persons

This watercraft is designed to carry the operator and up to 2 passengers. Never exceed the maximum load limit 225 kg (496 lb) or allow more than 3 persons (or 2 persons if a water-skier is being towed) to ride the watercraft at a time (See the Loading/Accessories/Modifications section in the GENERAL INFORMATION chapter).

WARNING

Overloading this watercraft can adversely affect handling and stability which can lead to an accident. To reduce the risk of having an accident, do not exceed the maximum recommended number of people.

Regardless of the number of people on board, the total weight including cargo must never exceed the load capacity limit. Passengers should always use the seats.

Safe Riding Rules


- Always follow these rules when operating your watercraft, for your own safety and that of others.
- Always comply with any Navigation Rules in effect in your area. The Coast Guard office or state boating authority nearest you can usually furnish you with the applicable rules. Check local and state regulations before operating. Kawasaki

recommends that all operators complete an approved boating safety course.

Personal Flotation Device and Safety Gear

U.S. federal regulations require that one U.S. Coast Guard approved personal flotation device (PFD) be carried for each person aboard when operating on water under Coast Guard jurisdiction. In some state waters not under federal jurisdiction, other flotation devices are permissible in addition to those specified by federal law. Other countries may have their own standards and regulations; be sure to follow them. As a rule, waist-type ski belts do not qualify as adequate flotation devices. The full vest type is recommended. Check local regulations to see what type of personal flotation device may be required in your area.

Drowning Hazard: a personal flotation device (PFD) must be worn by the operator and passengers. Kawasaki recommends that the operator and passengers wear a vest-type PFD (type 1, 2 or 3) at all times.

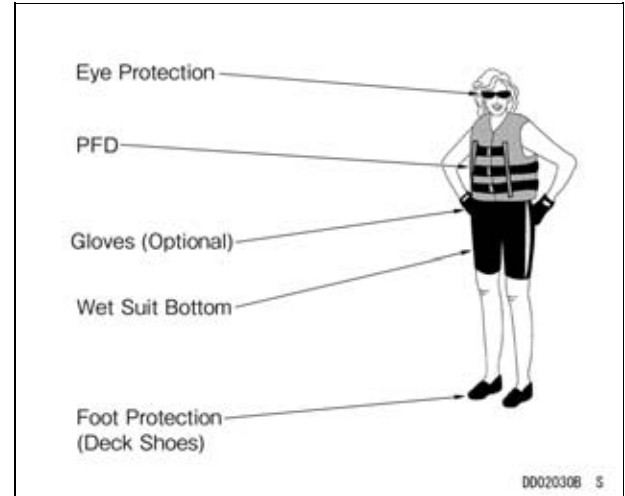

74 OPERATING INSTRUCTIONS

WARNING

- All riders must wear a Coast Guard approved personal flotation device (PFD) that is suitable for personal watercraft (PWC) use. Kawasaki recommends a vest-type PFD.

Hard impact with the water can result in unconsciousness and/or drowning. Make sure that your PFD fits correctly and tightly so that it does not come off in the water. Never use an adult size PFD for children.

Severe internal injuries can occur if water is forced into body cavities as a result of falling into water or being near the jet thrust nozzle. Normal swimwear does not adequately protect against forceful water entry into the rectum or vagina. All riders must wear a wet suit bottom or clothing that provides equivalent protection. Wet suits are made of a thick material (neoprene) that significantly retards the velocity of water passing through it. Normal swimwear will not adequately protect you but some other aquatic wear may protect against this injury. Swimsuits that may be displaced by the force of the water will not provide that protection. Materials that are thicker, materials that are a tighter weave, materials that are water repellent, and materials that are closer fitting will tend to provide more protection. In the absence of wearing a wet suit bottom, you should select a clothing design that will maximize your protection.

- Wear protective footwear, gloves and goggles (glasses).

Watercraft Helmet..... Something You Should Know

A helmet helps protect your head, but could contribute to neck injuries.

Before wearing a helmet on a personal watercraft you must weigh the benefits and risks.

Benefits: Helmets offer some head protection from impacts with hard objects.

Risks: Helmets could reduce peripheral vision and increase fatigue; both of which could lead to a collision. Helmets could also increase loads on the neck and throat if you fall into the water, which could result in severe injuries.

You must decide.

If you plan to ride under conditions in which you believe there is a higher chance that your head may be hit by a hard object, such as falling during a race, you may choose to wear a helmet and accept the risks. On the other hand, if head impact with the water is more likely, you may choose to not wear a helmet.

Fire Extinguisher

A charged and functional fire extinguisher must be carried on board, and may be stored in the storage compartment (see the Center and Rear Storage Cases section in the GENERAL INFORMATION chapter). Be sure to install the fire extinguisher securely.

Because the watercraft is an inboard boat less than 4.8 m (16 ft) in length, federal regulations require that a fire extinguisher rated "B-1" (minimum 1

kg or 2 pound capacity) be aboard when operating on navigable waters under Coast Guard Jurisdiction. In addition, most states, parks, and wildlife departments require that a U.S.C.G. approved fire extinguisher be carried aboard, even on waters not under federal jurisdiction.

Other countries may have their own standards and regulations; be sure to follow them.

⚠ WARNING

A fire aboard the watercraft may cause burns, melt the hull and cause it to sink, leaving the operator and passengers stranded. To prevent any fire from consuming the watercraft, always carry a fire extinguisher.

Standard equipment does not include a fire extinguisher. Many owners prefer to provide their own fire extinguishers. If you wish, your dealer can furnish you with an approved Kawasaki accessory fire extinguisher (P/N. W99997-101A).



76 OPERATING INSTRUCTIONS

Weather condition

- Before operating your watercraft, check with local weather reports.

NOTE

- *Generally, weather can change more suddenly over the sea than over the land, so pay close attention to the weather when using the watercraft. If you notice any signs of strong wind or fog, immediately return to shore.*

WARNING

- **Do not operate the watercraft in adverse weather condition or in wild waves. It could lead marine peril.**
 - **Slow down before crossing waves. Crossing wild waves at high speeds could increase the risk of back/spinal injury (paralysis), facial injuries, and broken legs, ankles, and other bones.**
- The operator must judge what is a safe speed taking into consideration visibility, traffic, weather conditions, waves, etc. Water conditions such as converging waves can have considerable influence on the ride characteristics of a personal watercraft and can cause the operator and passengers to fall off. Additionally, attempting to achieve maximum speed in adverse conditions

can cause abrupt movement of the boat causing possible injury to the riders.

Basic Operating and Riding

Posture on the Seats

When riding the watercraft, sit astride the seat.

WARNING

Rough water can cause the watercraft to suddenly rise, creating the potential for the handlebar to strike and injure a rider who is positioned too close. To avoid injury, never ride with any part of your body immediately above the handlebar.

If porpoising occurs, that is, the front of the craft rises and falls rapidly, move your body weight further forward.

Operation with Passengers

- Before starting, the operator should ensure passengers are sitting properly astride the seats. They should hold on to the person in front of them or a hand strap while keeping both feet on the deck for balance when travelling or they could fall and injure themselves. The driver should warn passengers before opening the throttle and should not try to throw passengers off.



- Never allow the passenger to ride in front of the operator. Do not carry children unless both feet are able to reach the deck.

Boarding from Water

Solo Operation

- Move to the rear of the watercraft.
- Make sure the engine is stopped.
- Grasp the handrail on the rear of the seat, pull the reboarding step down, and while placing one knee and then one foot or both feet on the step, pull yourself up onto the deck. Place one knee on the deck rear end, then the other. Be careful not to slip on the step or boat as you reboard.
- Grasp the hand strap and while balancing the craft place your feet on the deck.
- Sit astride the seat.

78 OPERATING INSTRUCTIONS

Operator and Passengers

- While the operator is balancing the craft, the passengers climb aboard from the rear of the craft in the same way as in Solo Operation.

WARNING

The reboarding step is adjacent to the jet pump nozzle, and water and/or debris ejected from the jet thrust nozzle can cause severe injury. To avoid injury, The operator should always stop the engine and pull the engine shut-off lanyard key before a passenger uses the reboarding step. The passenger should not use the reboarding step while the engine is running.

Boarding from a Dock

- Do not jump onto the watercraft from the dock.
- First place one foot on the deck near the dock, then while holding the handlebar and balancing the craft by transferring body weight straddle the craft and sit down on the seat.

Break-In

A new watercraft should be ridden with care during the break-in period to allow mechanical components to “bed-in” and produce smooth, long wearing surfaces.

Do not exceed the engine speeds listed below during the break-in period.

During the first five minutes: Maximum 2 500 rpm
During the next hour: Maximum 4 000 rpm
During the next 30 minutes: Maximum 6 000 rpm

Careful treatment of the craft during the break-in period will result in more efficient, reliable performance and a longer life for the craft.

In addition to the break-in described above, we recommend that the owner take his watercraft to an authorized Kawasaki JET SKI watercraft dealer after the first ten hours of operation for initial maintenance service. See the Periodic Maintenance Chart in the MAINTENANCE AND ADJUSTMENTS chapter.

Stopping the Engine


The engine can be stopped in one of the following two ways.

- Push the red “STOP” button. It is not necessary to hold the button in to stop the engine. After the engine stops, the “STOP” button resets itself and the engine is ready to start.
- Pull the engine shut-off lanyard key off the stop button. To start the engine the lanyard key must be pushed under the stop button.

Remove the ignition switch key after stopping the engine in either case.

⚠ WARNING

A JET SKI watercraft requires throttle (thrust) to steer and help you to avoid objects - you have no directional control when the engine is stopped. To avoid objects the engine must be running and throttle applied to steer away from objects. Always check the throttle and steering controls for proper operation before starting the watercraft.

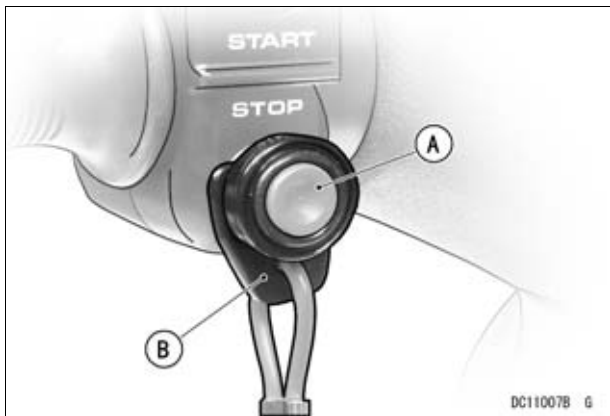

A. Stop Button
B. Lanyard Key

If the engine must be stopped immediately in an emergency, push the red "STOP" button or pull the engine shut-off lanyard key off the stop button.

Some possible "EMERGENCY" situations are:

- The engine speeds out of control.

- The throttle lever does not release completely.

⚠ WARNING

A JET SKI watercraft requires throttle (thrust) to steer and help you to avoid objects - you have no directional control when the engine is stopped. If the throttle fails, do not operate the watercraft until the source of the problem is found and corrected.

⚠ WARNING

After riding, remove the ignition switch key and engine shut-off lanyard key from the watercraft to avoid unauthorized use by children or others.

NOTICE

A discharged battery will not provide power to start the engine. To prevent the battery from discharging, always remove the ignition key after stopping the engine.

Starting the Engine

- Read the PRE-RIDE CHECK chapter in this manual and follow its instructions before putting the watercraft in the water.
- After transporting or refueling and before starting the engine, open the front storage compartment


80 OPERATING INSTRUCTIONS

lid and remove the seats for several minutes to ventilate the engine compartment.

⚠ WARNING

A concentration of gasoline fumes in the engine compartment can cause a fire or explosion. To prevent a fire or explosion, remove seat for several minutes to purge gasoline fumes from engine compartment.

- Place the watercraft in at least 0.8 m (2.6 ft) of water which is clear of weeds and debris. Make sure the area ahead of the watercraft is clear of swimmers, boats, and obstacles.

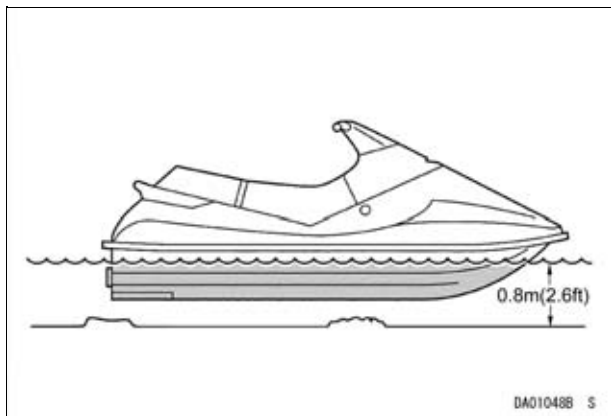

NOTICE

- When starting the engine or riding, the watercraft must be in water at least 0.8 m (2.6 ft) deep. Sand or debris from the bottom may be drawn into the jet pump and damage the pump and impeller, and possibly clog cooling lines.
- If operating in shallow or debris-laden water, objects or sand from the bottom can get sucked in damaging the impeller and possibly clogging cooling hoses which can cause severe engine damage from overheating.
- Avoid beaching the watercraft. Stones and sand can scratch the hull and be drawn into the jet pump, causing damage to the impeller.

- In the seated position push the lanyard key under the stop button and put your left hand through the other end of the lanyard to attach it to your wrist. Pull the lanyard to make sure it is securely attached and keep it free from the handlebars so that the engine stops if the driver falls off.


NOTE

- *The engine neither cranks nor starts with the lanyard key removed from the stop button.*
- Insert the ignition key into the key slot in the center storage case and press the key further in.

- If the engine is not started within three minutes, the ignition switch turns off automatically.

NOTE

- *This watercraft is equipped with two kinds of ignition keys, SLO and FPO. Choose an appropriate key depending on your skill. These keys are equipped with an immobilizer system. Only use coded and registered keys. Refer to the Ignition Switch section in GENERAL INFORMATION chapter for more details.*
- *The watercraft is equipped with a vehicle-down sensor, which causes the engine to stop automatically and the warning indicator light to illuminate and the engine warning indicator and the “FI” character blink when the watercraft has capsized and the start button is pushed in. If the watercraft has capsized and been righted within 3 minutes, push the start button to start the engine. If the watercraft has capsized for more than 3 minutes, after righting the watercraft, first push the key and then push the start button to start the engine.*
- Be sure to keep the key inserted in the slot while riding the watercraft. This is important because if you lose the keys at sea you will be unable to start the engine again and may end up being stranded.
- With your left hand, push the green start button and release it when the engine starts. If the engine does not start within 5 seconds, release the button. Wait 15 seconds before trying again. If the engine does not start after several attempts, see the IN AN EMERGENCY chapter.

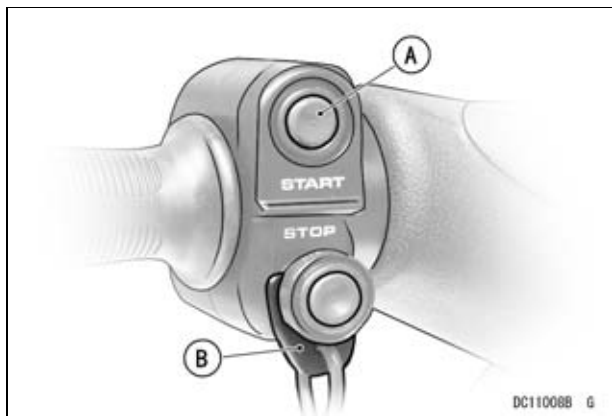

A. Start Button
B. Lanyard Key

NOTE

- Wait 15 seconds between each operation of the starter. This will extend battery and starter life significantly.


NOTICE

Do not push the “START” button while the engine is running or while the starter is still spinning as this causes premature starter wear and may cause it to jam.

- After the engine has started, allow it to warm up for about 1 minute. Apply a little throttle occasionally. Excessive idling can foul the spark plugs.

82 OPERATING INSTRUCTIONS

- Check that water comes out of the bypass outlet in the right side of the hull when the throttle is applied. This indicates that cooling water is circulating. If there is none, shut off the engine and find the source of the problem. When the exhaust system is dry, it can take up to 15 seconds for water to appear at the bypass outlet.

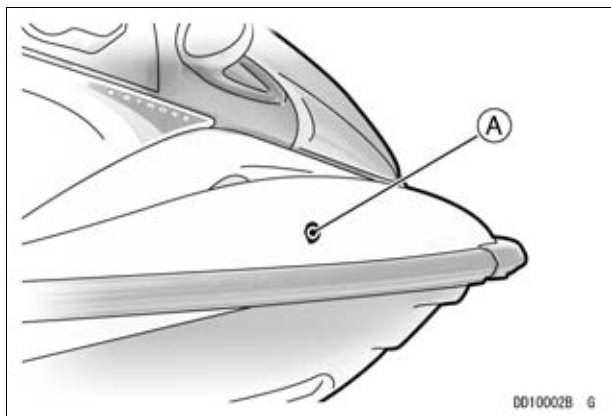

A. Bypass Outlet

Launching

Launching/Start

Launching

- Before putting the watercraft in the water, be sure you have followed the Pre-ride Checklist.
- Before launching, check the ramp for suitable surface conditions, inclination and width for both the trailer and tow vehicle.

<i>NOTICE</i>
Ensure the drain screws are securely tightened before launching to prevent flooding which may cause sinking or severe engine damage.

- Attach a bow line to the watercraft and detach the trailer tie-downs.
- Wait until it's your turn then back the trailer to the water.
- Unlock the winch and push the craft slowly off the trailer into the water.
- Move your watercraft to a docking or loading area and park your tow vehicle. Do not block the ramp.

Start

- Check that the shift lever is in the “F” position to go forward or “R” for reverse.
- When leaving the dock, either push the watercraft away from the dock or run at a slight angle away from it until there is enough room for the rear of

the craft to swing, since the watercraft turns at the stern and not at the bow.

- Check that your path is clear and move the handlebar in the direction you want to go.

WARNING

Failure to see other boats or obstructions in your path can cause an accident resulting in injury or death. To reduce the risk of accident, always observe your surroundings. This is especially critical during a new operator's first exciting ride.

- Apply the throttle to produce enough thrust from the jet pump to allow directional control over the watercraft.

NOTICE

Avoid quick turns or acceleration when leaving the dock, or you might hit the dock and damage the watercraft. The operator should make sure there is room for a turn before making any quick maneuvers.

- Accelerate gradually as you proceed into open water. Remember to observe "No Wake" zones and speed limits.
- As speed increases the watercraft will level out in the water. This is called planing.
- Once the watercraft is planing, you can back off the throttle and select your desired speed.

- Keep alert for other watercrafts, swimmers, or obstructions in your path.

Shallow Water Start

- Whenever possible, anchor the watercraft in shallow water instead of dragging it onto shore. This will reduce scratches to the hull and prevent sand and rocks from entering into the jet pump causing damage to the pump when restarting the engine.
- If the watercraft is beached, sand and rocks which are pushed into the jet pump by natural wave action can be flushed out by pushing down on the stern vigorously many times.

NOTICE

When starting the engine or riding, the watercraft must be in water at least 0.8 m (2.6 ft) deep. Sand or debris from the bottom may be drawn into the jet pump and damage the pump and impeller, and possibly clog cooling lines. If operating in shallow or debris-laden water, objects or sand from the bottom can get sucked in damaging the impeller and possibly clogging cooling hoses which can cause severe engine damage from overheating. Avoid beaching the watercraft. Stones and sand can scratch the hull and be drawn into the jet pump, causing damage to the impeller.

84 OPERATING INSTRUCTIONS

Stopping the JET SKI Watercraft

WARNING


This high-performance watercraft is capable of high speeds that can be hazardous when directly approaching any moving or stationary object. To avoid an accident, never directly approach any moving or stationary object closer than 100 meters (328 feet) when traveling at high speed. Always throttle down before approaching your intended stopping area.

This watercraft stops by using natural water drag to bring the craft to a halt.

1. Release the throttle before you reach your intended stopping area.
2. Coast towards the stopping area with the engine idling.


NOTICE

When starting the engine or riding, the watercraft must be in water at least 0.8 m (2.6 ft) deep. Sand or debris from the bottom may be drawn into the jet pump and damage the pump and impeller, and possibly clog cooling lines. If operating in shallow or debris-laden water, objects or sand from the bottom can get sucked in damaging the impeller and possibly clogging cooling hoses which can cause severe engine damage from overheating. Avoid beaching the watercraft. Stones and sand can scratch the hull and be drawn into the jet pump, causing damage to the impeller.

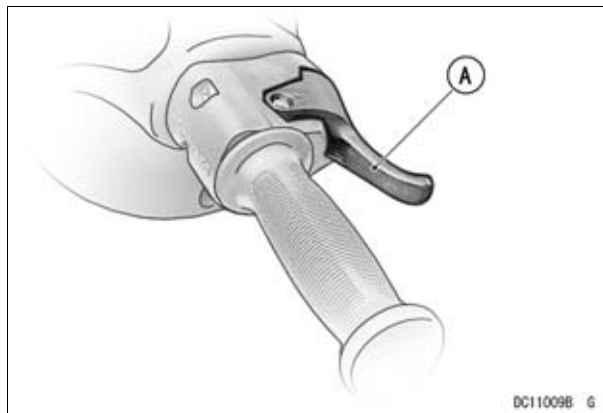

A. Throttle Lever

- Press the stop button or pull the lanyard key off the stop button to stop the engine.

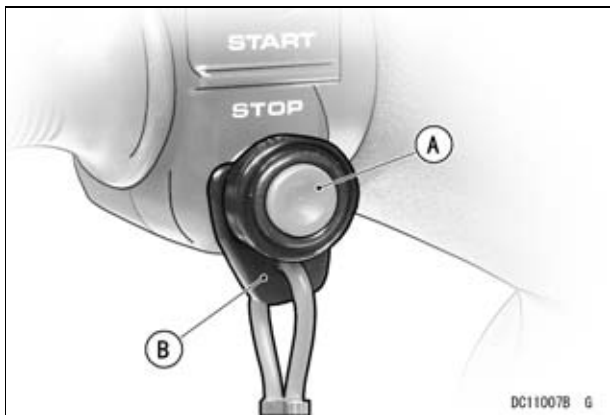

A. Stop Button
B. Lanyard Key

Releasing the throttle slows forward motion but the engine will still be running, so you can steer the boat after reapplying the throttle. In this manner you can turn and move away from any obstacles.

Push the stop button when you are approaching the shore and intend to stop. The engine stops immediately, so it prevents sand or debris from entering and damaging the jet pump. Never run the engine in water less than 0.8 m (2.6 ft) deep.

Stopping Skills

Stopping distance depends partially on rider and passenger weight and position, idle set speed, and operating speed. Experienced operators can usually

shorten stopping distance by using various riding techniques. Turning the boat sharply (using the throttle) while stopping is a method which can be used to decrease stopping distance.

Minimum Stopping Distances

The minimum stopping distance of this watercraft with the operator and passengers from maximum speed is 86 m (282 ft). (Obtained under controlled conditions, actual stopping distances may vary depending on vehicle load and water conditions.)

Turning the JET SKI Watercraft

Turning the watercraft requires a combination of two actions:

- Turning the handlebar
- Using the throttle


⚠ WARNING

A JET SKI watercraft requires throttle (thrust) to steer. Releasing the throttle completely reduces the ability to steer and stopping the engine eliminates the ability to steer. Either operation may cause you to hit an object you are trying to avoid, causing injury or death. To avoid collisions do not stop the engine while riding; maintain or apply throttle as needed to maintain thrust at the jet nozzle to initiate a turn.

86 OPERATING INSTRUCTIONS

Point the handlebar to
the left for a left turn

Point the handlebar to
the right for a right turn

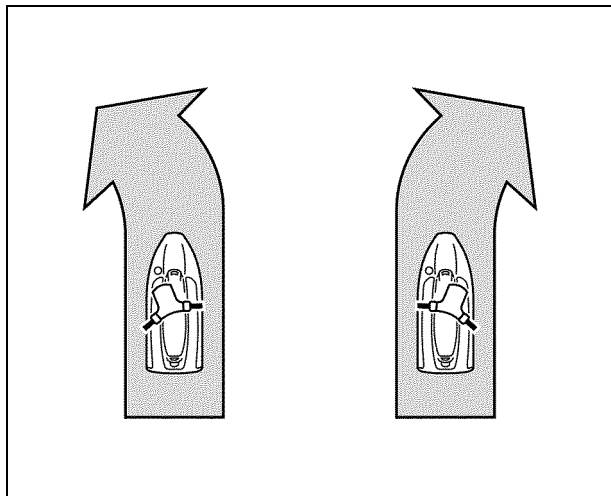


LEFT

RIGHT


Using the throttle is another important part of turning maneuvers. Applying the throttle produces thrust from the jet pump giving you directional control over the watercraft.

High thrust from the jet pump makes the boat turn more sharply.

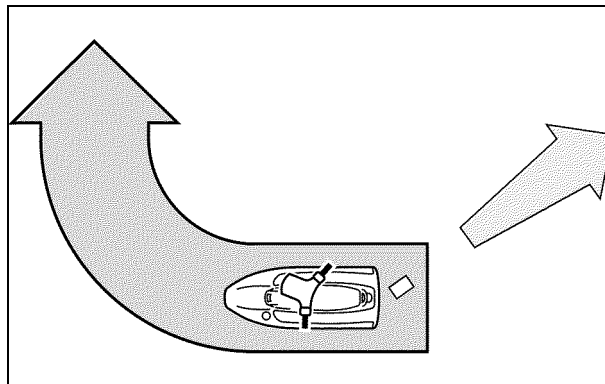


OPERATING INSTRUCTIONS 87

Less thrust from the jet pump makes the boat turn less sharply.

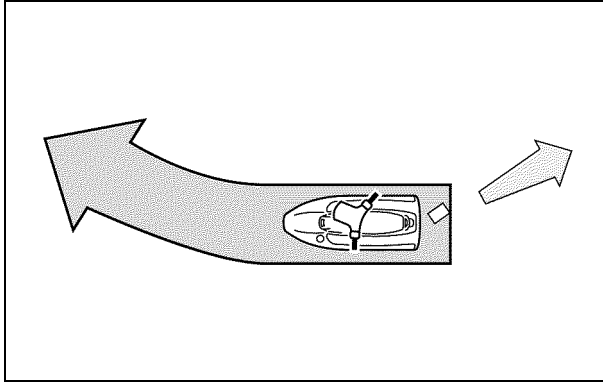


If you release the throttle completely, there is little thrust from the jet pump. The boat turns slowly and steering ability is reduced.

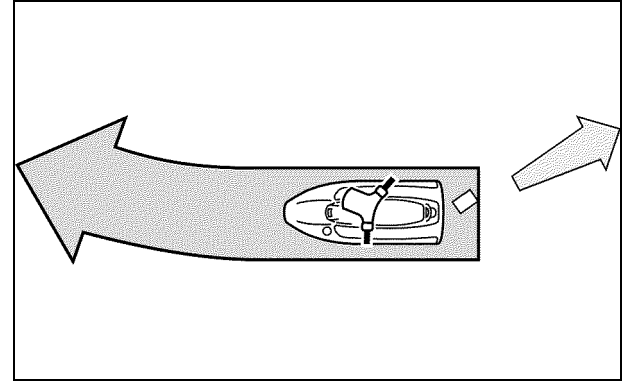

IDLE = SLOW, GRADUAL TURN

88 OPERATING INSTRUCTIONS

If you stop the engine while riding, there is no thrust from the jet pump. The boat will go straight ahead even though the handlebar is turned.

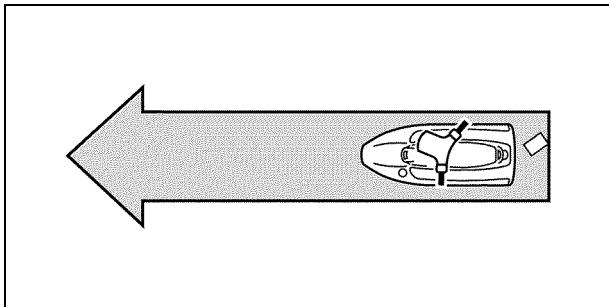

NO THRUST = NO TURN

This is one characteristic of jet drive boats which is important to remember when you make an emergency maneuver: **YOU MUST HAVE THRUST TO TURN**, so keep the throttle on or apply throttle as needed to maintain thrust at the jet nozzle.

- Throttle down before entering a turn.

WARNING

This is a very maneuverable, sport watercraft and quick turns or sudden acceleration can cause the passengers to fall overboard, causing an accident with other boats resulting in injury or death. To help prevent passengers from falling overboard, avoid making quick turns and sudden accelerations when carrying passengers. Look carefully for other boats before making any maneuvers. Advise passengers to hold on at all times.

Before making a turn, always look over your shoulder to make sure no other watercraft is coming from behind. Do not rely solely on the rear view mirror; you may misjudge a watercraft's direction, distance or speed, or you may not see it at all.

The Kawasaki Smart Steering™ (KSS™) system on your JET SKI watercraft assists you in learning to negotiate turns and maneuver. Refer to the Controls section in the GENERAL INFORMATION chapter.

Operating the JET SKI Watercraft in Reverse

- If possible, please do not use reverse except for the cases where it is unavoidable, such as maneuvering to a dock or the shore.
- Be sure to slow the watercraft to a stop before shifting to reverse. Release the throttle lever completely. Pause until the watercraft slows down, then move the shift lever into the "R" position.

⚠ WARNING

Suddenly shifting into reverse at high speed can cause the bow to suddenly dive into the water, throwing the occupants forward which can cause severe injury. To avoid injury, do not shift into reverse while going forward and do not use reverse as a brake. Slow the watercraft to a stop and alert any passengers before shifting to reverse.

- Turn around and look behind you before backing up to be sure there are no other boats, swimmers, or obstructions in your path. Do not rely solely on the rear view mirrors; you may not see objects clearly, or at all.
- Gradually open the throttle and begin backing up cautiously.

Docking the JET SKI Watercraft

- When docking use the throttle efficiently both to control the craft's speed and to keep directional control over the craft.
- When you are approaching the shore where you intend to land, push the stop button to prevent sand from entering the jet pump and the impeller. Do not operate the engine in water shallower than 0.8 m (2.6 ft).

NOTICE

When starting the engine or riding, the watercraft must be in water at least 0.8 m (2.6 ft) deep. Sand or debris from the bottom may be drawn into the jet pump and damage the pump and impeller, and possibly clog cooling lines. If operating in shallow or debris-laden water, objects or sand from the bottom can get sucked in damaging the impeller and possibly clogging cooling hoses which can cause severe engine damage from overheating. Avoid beaching the watercraft. Stones and sand can scratch the hull and be drawn into the jet pump, causing damage to the impeller.

- Remember that stopping the engine causes you to lose steering control, so cut the engine only after you have reduced speed and maneuvered into your final approaching position. You cannot make any emergency maneuvers with the engine stopped.

Fall Recovery

If the operator falls off the craft, the lanyard key is pulled off of the stop button and the engine is stopped immediately.

90 OPERATING INSTRUCTIONS

WARNING

Maintaining hold of the handlebar during a fall may cause you strike the watercraft, resulting in injury. To avoid injury during a fall, release your grip on the handlebar.

- Reboard from the rear of the craft. Push the lanyard key under the stop button, and push the start button to start the engine.

Righting the Capsized Watercraft

If the watercraft should capsize, the engine will be stopped either by the lanyard key being pulled off the stop button by the operator or by the vehicle down sensor detecting that the craft has exceeded the bank limit for an extended time. Use the following procedure immediately to right the craft.

WARNING

This watercraft will not self-right if capsized, leaving the operator and passengers stranded. To avoid being stranded in the case of capsizing, be sure you know the proper righting procedure.

- Make sure the engine is stopped. If it is not stopped, immediately pull the lanyard key off the stop button or push the stop button to stop the engine.


NOTICE

To prevent severe engine damage, immediately stop the engine if the craft capsizes. If it continues running while capsized, water can enter the throttle body and engine, locking the engine and causing severe and immediate damage to internal engine parts.

Do not operate the watercraft with water in the engine.

Do not try to start the engine until it is completely empty of water; internal engine parts could be severely and immediately damaged. If water gets into the engine, follow the procedure described in the After Submerging section.

- Swim to the rear corner of the capsized craft.
- Push down on the port side of the craft with one hand and reach across the hull and grasp the rear of the deck with the other, as though trying to pull yourself up onto the bottom of the hull.

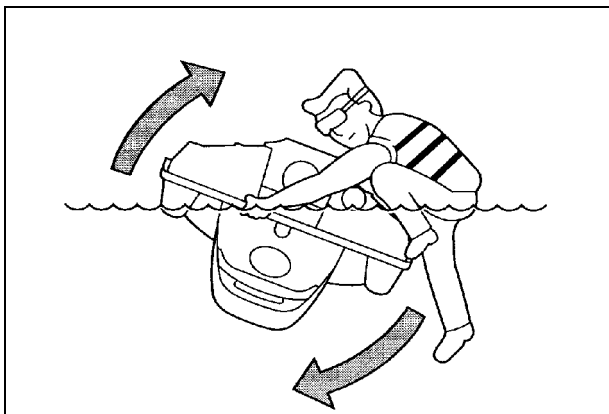

- Now, push down on the rear corner of the hull with one foot, using your body weight to roll the capsized craft toward you.
- As the craft rolls over toward you, reach for the far side of the hull, if needed, and pull it on over.


NOTICE

Rolling the capsized watercraft counterclockwise (to its **STARBOARD** side) can cause water in the exhaust system to run into the engine, with possible engine damage. Always turn the capsized boat clockwise so that the **PORT** side always faces downward.

- After the watercraft has capsized and if it was not immediately righted, it may have water in the engine compartment. Carefully go back aboard from

the rear, trying not to let more water into the engine compartment under the seats.

- If the bottom of the seat is sufficiently above the waterline, carefully remove it and check for water in the engine compartment.
- If more than 51 mm (2 in.) of water is present, as measured from the bottom of the engine compartment, it may have entered the intake tract and will cause severe engine damage. Do not attempt to start the engine. Tow the watercraft slowly to shore, drain the water out of the engine compartment and follow the procedure described in the After Submerging section.

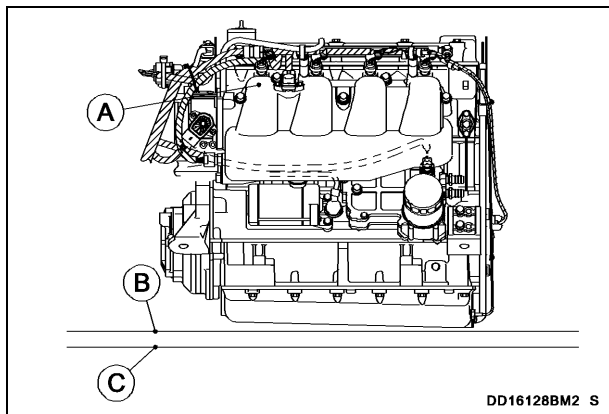

DD16128BM2 S

- A. Engine
- B. Water Level
- C. Bottom of Engine Compartment

92 OPERATING INSTRUCTIONS

NOTE

○ *If you have a passenger, he or she may want to return to shore on another watercraft to decrease the load on yours, and prevent it from taking on more water.*

- If the watercraft was correctly righted to its starboard side and there is less than 51 mm (2 in.) of water in the hull, start the engine so that the bilge pump can help remove water from the engine compartment.
- Push the lanyard key under the stop button, and push the start button to start the engine.
- If the engine runs properly, slowly ride the watercraft back to shore. Check to be sure the bilge pump is removing any water in the hull and that the craft rides properly on the water. Once ashore drain any water remaining in the engine compartment.
- If the engine does not run properly or the craft rides incorrectly on the water, tow the watercraft slowly to shore, beach it, and drain the water out of the engine compartment. This will help prevent getting water in the engine, which could cause severe and immediate damage to internal engine parts.

After Submerging


NOTICE

If water enters the engine it will cause severe damage. Do not operate the watercraft with water in the engine. Do not try to start the engine until it is completely empty of water. If water gets into the engine, follow this procedure immediately! If water is left in the engine more than a few hours, it will destroy the crankshaft bearings and damage other internal engine parts.

If the watercraft is swamped, water may enter the engine through the throttle body. Water also may enter the fuel tank.

You need systematic inspections and remedies for a swamped watercraft. The following procedure explains the necessary steps you must take. Carefully read the summary of the procedure first, and then the detailed steps.

Summary of the procedure

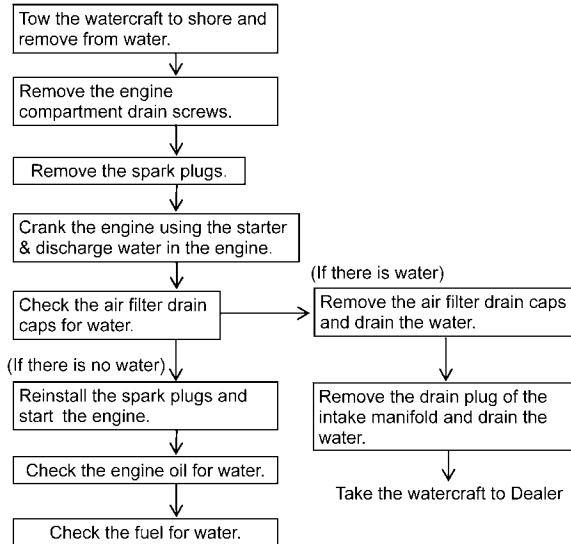

DD16112B F

Details of the steps

1. Remove the craft from the water, and remove the seat.
2. Remove the drain screws in the stern to drain water out of the engine compartment.

3. Disconnect the two connectors on the primary ignition cables located in front of the ignition coil.



A. Cable Connectors

4. Remove the center storage case for obtaining access for the above work.

94 OPERATING INSTRUCTIONS




A. Center Storage Case

5. Remove all the spark plug caps.
6. Remove all spark plugs.
7. Insert the ignition key, push the lanyard key under the stop button, and push the start button.
8. If there is any water in the engine, it will be pumped out of the spark plug holes. Do not operate the starter for longer than 5 seconds. Wait 15 seconds before using it again. Be sure that all the water is out of the engine.

⚠ WARNING

A water and gasoline mixture will be forcibly ejected from the spark plug holes and could injure your eyes. To prevent eye injury, do not lean over the engine when performing this procedure. If gas does get in your eyes, immediately wash them with plenty of clean, fresh water and consult a physician as soon as possible.

9. Remove the rear storage case, and check the air filter drain caps for water.

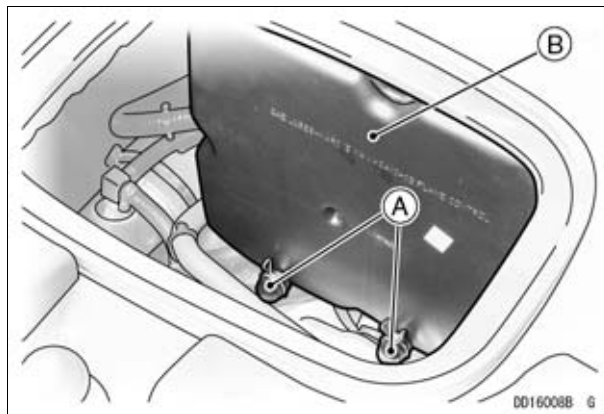

- A. Drain Caps**
B. Air Filter

10. If you see water in the caps, then remove both caps and drain the water. Be sure to have a rag


or cloth underneath for possible oily water. And proceed to the next step (item 11). If there is no water in the air filter inspection caps, then proceed to item 12.

NOTE

- If you see water in the drain caps, there is a strong possibility that water has entered the intake manifold. Take the watercraft to a Kawasaki dealer for service that requires removing some adjacent components for access.
- 11. Remove the drain plug of the intake manifold and drain water, if any, into a rag or cloth. Then take the watercraft to the Dealer.
- 12. Spray the spark plugs clean with air and then install them with their plug caps.
- 13. Reconnect the primary cable ignition connectors.

NOTE

- Reconnect the primary ignition coil cable connectors noting #1 & #4 coil connector (A) and #2 & #3 coil connector (B). The #1 & #4 connector has red/white and green/blue cables from the main harness. The #2 & #3 coil connector has red/white and green cables from the main harness.
- Before reconnecting apply a high quality waterproof marine grease to the connectors.

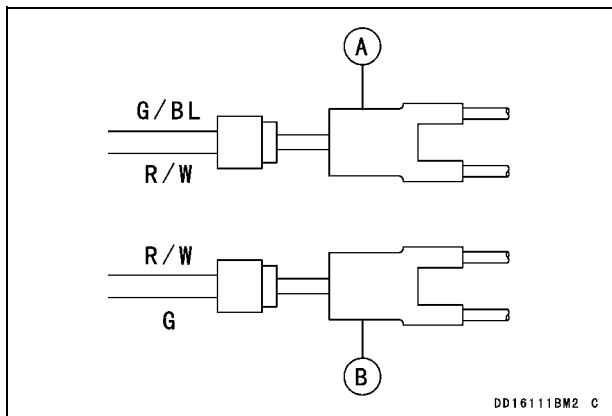

A. #1 & #4 coil connector

B. #2 & #3 coil connector

- 14. Start the engine by pressing the starter button and run for less than 15 seconds.

NOTICE

To prevent overheating resulting in engine and exhaust system damage, do not run the engine with the watercraft out of the water for more than 15 seconds at a time. Never operate the engine at maximum speed out of the water.

- 15. Remove the dipstick and check for the presence of water in the engine oil. (If there is water in it, oil looks milky.)

96 OPERATING INSTRUCTIONS

16. If the oil looks milky, then change the oil and repeat items 14 & 15 until the oil no longer appears milky.
17. If the engine does not start, there may be water in the fuel system.
18. If the fuel tank has water in it, it must be emptied by pump or siphon. Refill the tank with fresh fuel. Dispose of the contaminated fuel at an appropriate hazardous waste site.

WARNING

Gasoline is extremely flammable and can be explosive under certain conditions. To avoid a possible fire or explosion, pull the lanyard key off the stop button. Do not smoke. Make sure the area is well-ventilated and free from any source of flame or sparks; this includes any appliance with a pilot light.

WARNING

Gasoline is toxic and pollutes the environment. To protect the environment, do not discard gasoline; always return it to an authorized recycling center.

19. Continued problems may require cleaning of the fuel line to drain water.
20. Reinstall the seat and secure it.
21. Reinstall the drain screws in the stern.
22. Finally, run the watercraft IN WATER for at least 10 minutes to dry any remaining water and blow

any foreign matter (like salt) out through the exhaust.

NOTE

○ If this procedure seems difficult and beyond your mechanical abilities, see your authorized Kawasaki dealer.

End of the Day Checklist

NOTICE

Since JET SKI personal watercraft are not designed to be docked in the water for extended periods, prolonged immersion in water will cause the hull paint to bubble and peel, as well as electrolytic erosion of some metal parts in the jet pump. To prevent this, remove your JET SKI watercraft from the water at the end of each day's use; do not leave it in the water overnight. Your JET SKI watercraft will last longer and look better.

Drain the Exhaust System

- Remove the watercraft from the water.
- Start the engine and run it for several seconds to purge the exhaust system of excess water. Rev the engine repeatedly, until water stops coming out of the exhaust at the stern.


NOTICE

To prevent overheating resulting in engine and exhaust system damage, do not run the engine with the watercraft out of the water for more than 15 seconds at a time. Never operate the engine at maximum speed out of the water.

- After each use in salt water, flush the cooling system with fresh water (see the Cooling System Flushing section in the MAINTENANCE AND ADJUSTMENTS chapter). This will help prevent build up of salt deposits and eventual cooling system blockage.

Clean the Engine Compartment

- Remove the seats.
- If water has accumulated in the engine compartment, remove the drain screws in the stern to drain water out of the compartment.
- When the watercraft has been used at sea, rinse the engine compartment with fresh water.
- Be sure to reinstall the drain screws after draining.

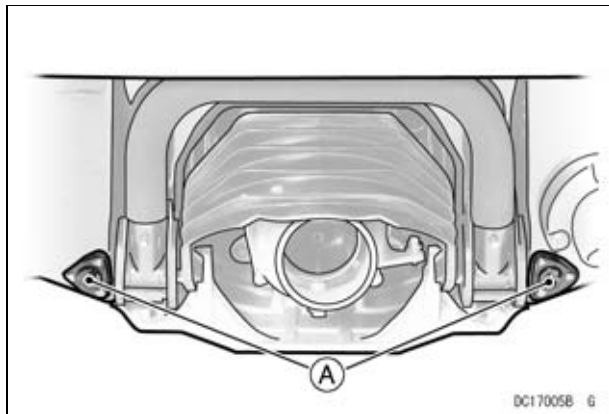

A. Drain Screws

98 OPERATING INSTRUCTIONS

NOTICE

Water can enter the engine through the airbox and cause severe engine damage, and shorts in electrical equipment. To prevent water damage, cover the air intake hole and do not spray electrical equipment.

- If you won't be using the watercraft for more than a week, lubricate the internal engine components to help prevent corrosion.
- If you won't be using the watercraft for more than two weeks, remove the battery and keep fully charged using a maintenance charger (see the Battery section in the MAINTENANCE AND ADJUSTMENT chapter).
- Wipe the engine compartment dry, and install the seats.
- When the watercraft is ready for storage, leave the seats off, or block them up with 10 mm (one half inch) spacers to aid air circulation and prevent condensation from forming.

Clean the Outside Hull

- Wash the hull, deck, water intake, and propulsion system with fresh water.

Clearing Clogged Impeller

Occasionally, weeds or other debris may lodge in the impeller/jet pump, severely impairing performance. This foreign matter must be completely cleaned out for the jet pump to function properly.

- Shut off the engine, and beach the craft.


WARNING

The jet pump contains moving parts that can cause severe injury. To prevent injury, never attempt to clear the jet pump of debris while the engine is running. Stop the engine and pull the lanyard key off the stop button before checking the pump for debris.


- Pull the lanyard key off the stop button.
- Place a protective pad next to the boat.
- Tip the boat on its **port side** and remove the jet pump grate and cover, if necessary.

NOTICE

Rolling the watercraft to its **STARBOARD side can cause water in the exhaust system to run into the engine, with possible engine damage. Always turn the boat on its **PORT** side.**

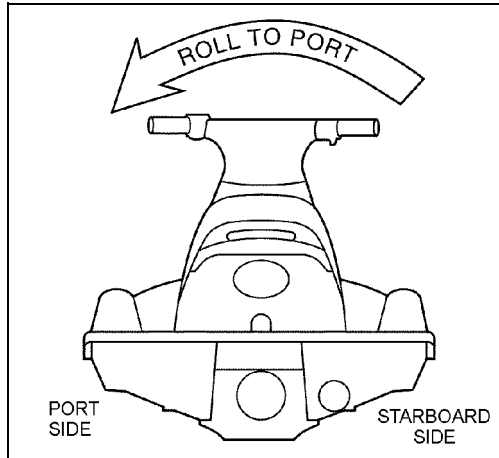

- Clean the water intake, drive shaft, impeller, jet pump housing, outlet, and steering nozzle of any seaweed, grass, or other debris.

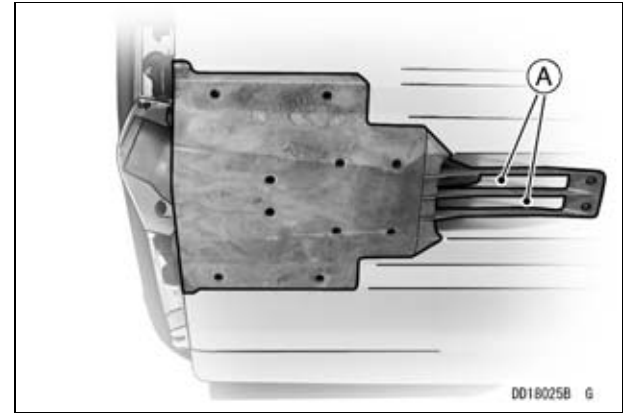

A. Water Intake

NOTICE

Engine cooling water is supplied by the jet pump, and any loss of pump performance may cause overheating resulting in severe engine damage. To prevent overheating, be sure the pump area and all its components are completely clear.

- Reinstall the jet pump cover and grate, apply non-permanent locking agent to the bolts before securely tightening.

Bolts Tightening Torque:
7.8 N·m (0.80 kgf·m, 69 in·lb)

TRANSPORTING AND STORAGE

Transporting

- When transporting the watercraft on a trailer, observe the trailer laws and regulations in your area.
- Be sure the trailer matches with the craft's weight and hull design.
- Securely fasten the watercraft to prevent movement between the craft and trailer.


NOTICE

Do not use the handrail to lift the craft or attach tie-downs as this can damage the handrail and/or hull.

After transporting and before starting the engine, open the front storage compartment and remove the seats for several minutes to ventilate the engine room (see Seat Latches and Storage Compartment sections in the GENERAL INFORMATION chapter).

WARNING

A concentration of gasoline fumes in the engine compartment can cause a fire or explosion. To prevent a fire or explosion, remove the seat to vent the engine compartment.

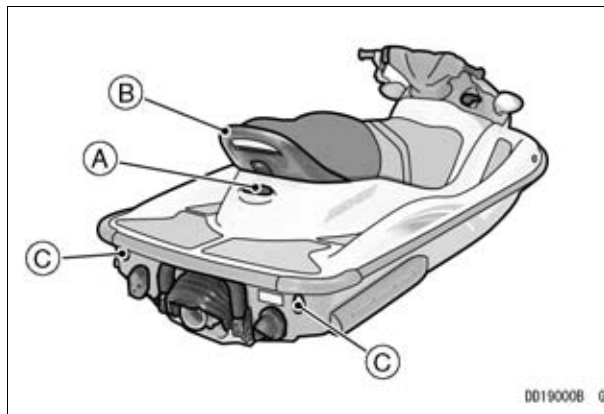

- A. Ski Tow Hook**
- B. Handrails**
- C. Stern Eyes**

STORAGE

During the winter, or whenever your watercraft will not be in use for more than 30 days, proper storage is essential. It consists of checking and replacing missing or worn parts; lubricating parts to ensure that they do not corrode and, in general, preparing the watercraft so that when the time comes to use it again, it will be in top condition. See your Kawasaki JET SKI watercraft dealer for this service or do the following.



A. Bow Eye

NOTICE

Only use the bow and stern eyes when fastening the watercraft to the trailer.

NOTICE

Since JET SKI personal watercraft are not designed to be docked in water for extended periods, prolonged immersion in water will cause the hull paint to bubble and peel, as well as electrolytic erosion of some metal parts in the jet pump. To prevent this, remove your JET SKI watercraft from the water at the end of each day's use; do not leave it in the water overnight. Your JET SKI watercraft will last longer and look better.

Preparation for Storage

Cooling System

- Clean the cooling system (see the Cooling System Flushing section in the MAINTENANCE AND ADJUSTMENTS chapter).

102 TRANSPORTING AND STORAGE


- When storing the watercraft in an area where the temperature drops below freezing, perform the following.

Discharging water in the exhaust system


NOTICE

Water remaining in the exhaust system during cold weather could freeze and damage the exhaust pipe. To prevent exhaust system damage, discharge water from the exhaust system after flushing the cooling system.

- After flushing, disconnect the cooling water hose from the fitting on the engine output cover at the rear of the engine. Lead the hose to the lowest level in the engine compartment so that water remaining in the exhaust pipe drains out.

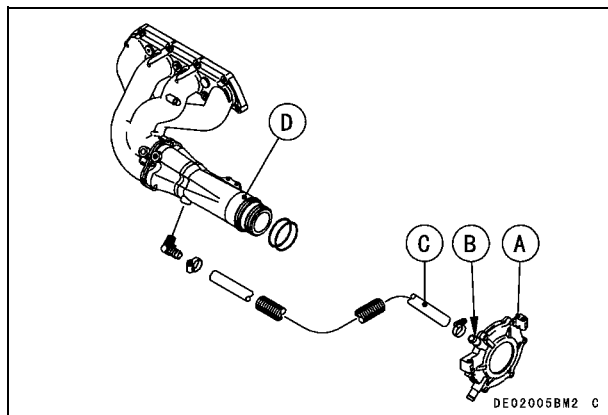

- A. Engine Output Cover**
- B. Fitting**
- C. Cooling Water Hose**
- D. Exhaust Pipe**

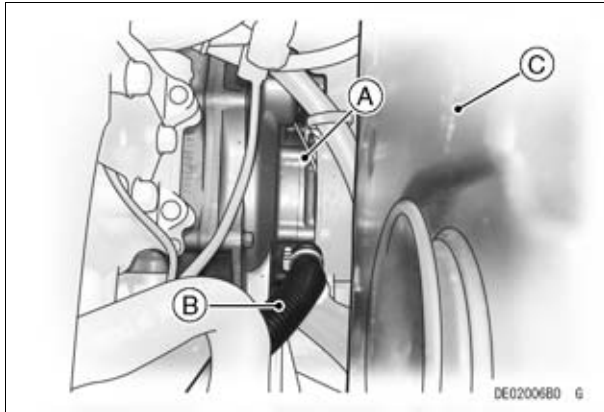

- A. Engine Output Cover
- B. Cooling Water Hose
- C. Air Filter Box


- Connect the hose to the fitting on the output cover and tighten the clamp securely.

NOTICE

If the cooling water hose comes off during operation, water could swamp the boat, causing it to sink or severe engine damage. Connect the hose securely to the fitting. If you are not confident you can perform storage procedures, ask your Kawasaki JET SKI watercraft dealer for this service.

Bilge System

- Clean the bilge system (see the Bilge System Flushing section in the MAINTENANCE AND ADJUSTMENTS chapter), and before reconnecting the four hoses to the plastic breather fittings, blow air through the hoses to force all water out of the bilge system.

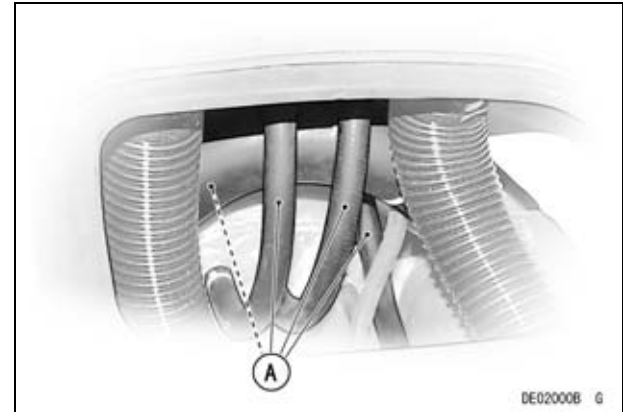

- A. Blow air through all four hoses.

Engine Oil

- Change the engine oil. See MAINTENANCE AND ADJUSTMENT chapter for detailed information.

Fuel System and Engine

- Wash the engine compartment with fresh water and remove the drain screws in the stern to drain the water. Wipe up any water left in the compartment.

104 TRANSPORTING AND STORAGE

⚠ WARNING

Gasoline is extremely flammable and can be explosive under certain conditions. To avoid a possible fire or explosion, pull the lanyard key off the stop button. Do not smoke. Make sure the area is well ventilated and free from any source of flame or sparks; this includes any appliance with a pilot light.

- Lift the stern upward a little so that fuel and water in the bottom of the fuel tank flow toward the fuel filler so you can completely drain the fuel tank. This should be done with a siphon or pump.

⚠ WARNING

Gasoline is toxic and pollutes the environment. To protect the environment, do not discard gasoline; always return it to an authorized recycling center.

- Inspect/clean the fuel pump screen. (See the Fuel System in the MAINTENANCE AND ADJUSTMENT chapter.)
- Refill the fuel tank with fresh fuel approximately 10 L (2.6 gal U.S.).
- Insert the ignition switch key.
- Push the lanyard key under the stop button, start the engine, and run it in fifteen seconds bursts until the fuel in the fuel system is replaced with the fresh fuel. Wait five minutes between each 15 seconds burst.

NOTICE


To prevent overheating resulting in engine and exhaust system damage, do not run the engine with the watercraft out of the water for more than 15 seconds at a time. Never operate the engine at maximum speed out of the water.

- Drain the fuel tank as previously described.
- Leave the fuel filler cap loose to prevent condensation in the tank.
- Remove the center storage case to obtain access for the next job.



A. Center Storage Case

- Disconnect the two connectors on the primary ignition cables located in front of the ignition coil.

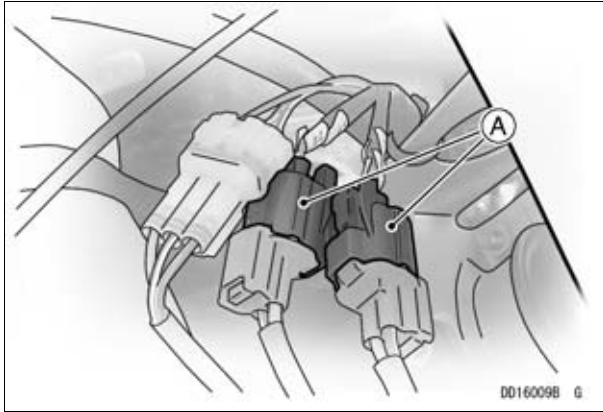

A. Cable Connectors

- Remove the spark plugs.
- Spray fogging oil directly into each cylinder.
- Turn the engine over several times with the start button to coat the cylinder walls.

⚠ WARNING

An air/oil mist will be forcibly ejected from the spark plug holes and could injure your eyes. To prevent eye injury, do not lean over the engine when performing this procedure. If gas does get in your eyes, immediately wash them with plenty of clean, fresh water and consult a physician as soon as possible.

- Spray the spark plugs with fogging oil, and reinstall them.


Spark Plugs Tightening Torque:
13 N·m (1.3 kgf·m, 115 in·lb)

- Pull the lanyard key off the stop button and the ignition switch key.
- Reinstall the spark plug caps.
- Connect the primary ignition cable connectors.

NOTE

- *Reconnect the primary ignition coil cable connectors noting #1 & #4 coil connector (A) and #2 & #3 coil connector (B). The #1 & #4 connector has red/white and green/blue cables from the main harness. The #2 & #3 coil connector has red/white and green cables from the main harness.*
- *Before reconnecting apply a high quality water-proof marine grease to the connectors.*

106 TRANSPORTING AND STORAGE

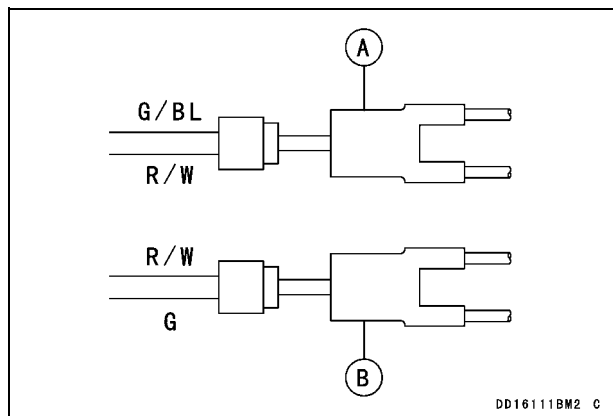

A. #1 & #4 coil connector

B. #2 & #3 coil connector

- Install the front storage pocket in place.

Battery

- Remove the battery (see the Battery section in the MAINTENANCE AND ADJUSTMENTS chapter).
- Clean the exterior with a solution of baking soda and water (one heaping tablespoon of baking soda in one cup of water). Rinse thoroughly with water.

NOTICE

Removing the sealed cap can damage the battery. To prevent battery damage, never remove the sealed cap.

- Coat both battery terminals with grease.
- Store the battery in a cool, dry place. Do not expose it to freezing temperatures. During storage it should be given a slow charge (one ampere or less) about once a month. Keep the battery well charged especially during cold weather.

Engine Mount Bracket Bolts

- Tighten all engine mount bracket bolts.

NOTE

○ *We recommend that you have this service done by your authorized dealer since it requires special tools.*

Jet Pump Bearings/Seals

NOTICE

Major engine damage can occur if the jet pump bearings fail due to lack of maintenance or if water remains in the pump during prolonged storage and corrodes the bearings. To prevent premature jet pump bearing failure, follow the service schedule and have the bearings serviced prior to prolonged storage.

Have your Kawasaki dealer inspect the jet pump bearings and seals after the first 25 hours of use or one year, whichever comes first; and then every 50 hours or every year, whichever comes first. The jet pump bearings should also be serviced before any prolonged storage to prevent any water that may be

left in the pump from corroding the bearings and causing premature failure.

Cleaning

- Wash the exterior and dry it thoroughly.

NOTICE

Harsh cleaning solvents may attack the surface or smear the colors. To preserve the finish, use only a mild detergent in water to wash the watercraft.

- Lightly spray all exposed metal parts with a penetrating rust inhibitor, such as WD40 or BEL-RAY 6 in 1 to prevent corrosion.
- Remove the seats, or block up with 10 mm (one half inch) spacers to insure adequate ventilation and prevent condensation from forming.
- Cover the watercraft and store it in a clean, dry place.

NOTICE

Water left in the footwells can cause the paint to bubble and peel, and the mat to peel off the deck. Do not allow water to collect in the footwells during storage. If the watercraft is left outside, even covered, water can collect in the footwells on either side of the seat. If the watercraft is left on a trailer, raise the trailer tongue so that water cannot accumulate in the footwells.

Semi-gloss Finish

To clean the semi-gloss finish:

- When washing the watercraft, always use a mild neutral detergent and water.
- The semi-gloss finish effect may be lost if the finish is excessively rubbed.
- If in any doubt, consult an authorized Kawasaki dealer.

Lubrication

- Carry out all recommended lubrication procedures (see the Lubrication section in the MAINTENANCE AND ADJUSTMENTS chapter).

Removal from Storage

The following procedure explains the steps necessary to put the watercraft back in service following a storage period. See your Kawasaki JET SKI watercraft dealer for this service, or do the following. See the MAINTENANCE AND ADJUSTMENTS chapter for detailed procedures.

- Carry out all recommended lubrication procedures (see the Lubrication section).
- Check for binding or sticking throttle, steering or shift mechanism. The throttle lever must return fully when released.
- Clean and gap spark plugs (see the Spark Plugs section).
- Check all rubber hoses for weathering, cracking, or looseness.
- Turn the craft on **port side** on a protective pad, and remove the jet pump cover. Check cooling

108 TRANSPORTING AND STORAGE

and bilge hoses for weathering, cracking or looseness.

- Replace them if necessary. Reinstall the cover, apply non-permanent locking agent to the bolts before tightening securely.

Bolts Tightening Torque:

7.8 N·m (0.80 kg·m, 69 in·lb)

- Check that the drain screws in the stern are securely tightened.
- Clean the terminals of the battery and charge if necessary. Install the battery (see the Battery section).
- Check the fire extinguisher for a full charge.
- Fill the fuel tank with fuel and close the filler cap securely.

WARNING

Gasoline is extremely flammable and can be explosive under certain conditions. To avoid a possible fire or explosion, pull the lanyard key off the stop button. Do not smoke. Make sure the area is well ventilated and free from any source of flame or sparks; this includes any appliance with a pilot light.

- After transporting or refueling and before starting the engine, open the front storage case lid and remove the seats for several minutes to ventilate the engine compartment.

WARNING

A concentration of gasoline fumes in the engine compartment can cause a fire or explosion. To prevent a fire or explosion, remove the seat to vent the engine compartment.

- Check for fuel leaks. Repair if necessary.
- Check the engine oil level. Fill with specified oil if necessary.

DANGER

Exhaust gas contains carbon monoxide, a colorless, odorless poisonous gas. Inhaling carbon monoxide can cause serious brain injury or death. DO NOT run the engine in enclosed areas. Operate only in a well-ventilated area.

- Start the engine and run it for 15 seconds. Check for fuel, oil and exhaust leaks. Any leaks must be repaired.

NOTICE

To prevent overheating resulting in engine and exhaust system damage, do not run the engine with the watercraft out of the water for more than 15 seconds at a time. Never operate the engine at maximum speed out of the water.

- Install the seats, making sure that they are locked in place.

MAINTENANCE AND ADJUSTMENTS

The maintenance and adjustments outlined in this chapter must be carried out in accordance with the Periodic Maintenance Chart to keep the watercraft in good running condition. **The initial maintenance is vitally important and must not be neglected.**

With a basic knowledge of mechanics and the proper use of tools, you should be able to carry out many of the maintenance items described in this chapter. If you lack proper experience or doubt your ability, all adjustments, maintenance, and repair work should be completed by a qualified technician.

Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect or improper adjustment made by the owner.

EMISSION CONTROL INFORMATION

Emission Control Information

To protect the environment in which we all live, Kawasaki has incorporated an exhaust emission and noise control systems in compliance with the requirements of the Recreational Craft Directive 2003/44/EC.

Exhaust Emission Control System

This system reduces the amount of pollutants discharged into the atmosphere by the exhaust of this engine. The fuel, ignition and exhaust systems of this engine have been carefully designed and constructed to ensure an efficient engine with low exhaust pollutant levels.

Fuel Information

THIS ENGINE IS CERTIFIED TO OPERATE ON UNLEADED GASOLINE ONLY.

A minimum of RON 91 is recommended.

Noise Emission Control System

This system reduces the amount of noise discharged into the atmosphere from this engine.

The intake and exhaust silencing systems have been carefully designed and constructed to ensure to give optimum performance while maintaining a low noise level.

Please do not tamper with the following noise emission related parts.

Propeller
Exhaust Manifold
Exhaust Pipe
Muffler
Inlet Manifold
Flame Arrester

Maintenance and Warranty

Proper maintenance is necessary to ensure that your watercraft will continue to have low emission levels. This Owner's Manual contains those maintenance recommendations for your engine. Those items identified by the Periodic Maintenance Chart are necessary to ensure compliance with the applicable standards.

112 MAINTENANCE AND ADJUSTMENTS

As the owner of the Personal Watercraft, you have the responsibility to make sure that the recommended maintenance is carried out according to the instructions in this Owner's Manual at your own expense.

The Kawasaki Limited Emission Control System Warranty requires that you return your Personal Watercraft to an authorized Kawasaki Personal Watercraft dealer for remedy under warranty. Please read the warranty carefully, and keep it valid by complying with the owner's obligations it contains.

Tampering with Emission Control System Prohibited

Do not tamper with the original emission related parts.

- * The Electronic Control Unit (ECU)
- * Fuel Pump
- * Spark Plugs
- * Fuel Injectors
- * Throttle Body

Periodic Maintenance Chart

NOTE

Complete the Pre-Ride Checklist before each outing.

Frequency		Initial 10 Hours	Every 25 Hours	Every 50 Hours	Every 100 Hours
Description					
	Inspect all hoses, hose clamps, nuts, bolts, and fasteners	●	●		
*	Lube jet pump bearings and seals; inspect and replace bearings/-seals if necessary	Initial 25 hours or one year whichever comes first, then every 50 hours or every year whichever comes first			
	Lubricate throttle body cable fitting at throttle body		●		
	Lubricate throttle control cable and throttle cable fitting at throttle case		●		
○	Clean and gap spark plugs (replace if necessary)		●		
	Lubricate steering cable/shift cable ball joints and steering nozzle/reverse bucket pivots		●		
*	Lubricate handlebar pivot (disassemble)		●		
○*	Clean fuel pump screen		●		
○*	Inspect/adjust valve clearances				●
	Inspect/clean air filter drain caps		●		
*	Inspect/clean air filter			● (or every year)	

114 MAINTENANCE AND ADJUSTMENTS

Description	Frequency	Initial 10 Hours	Every 25 Hours	Every 50 Hours	Every 100 Hours
Replace engine oil				● (or every year)	
Replace engine oil filter					●
* Inspect/tighten engine mount bolts				● (or every year)	
* Inspect fuel vent check valve			●		
○ Inspect throttle control system			●		
Flush bilge line and filter			●		
Flush cooling system (after each use in salt water)			●		
* Inspect impeller blades for damage (remove)					●
* Inspect/replace coupling damper					●
○* Inspect throttle shaft spring (replace throttle body if necessary)					●
* Inspect steering cable/shift cable					●
Inspect hull drain screws (replace if necessary)				●	
Inspect battery terminals			●		
* Replace fuel hoses		Every 5 years			

MAINTENANCE AND ADJUSTMENTS 115

- *: These items must be performed with the proper tools. See an authorized Kawasaki JET SKI watercraft dealer for service, unless you have the proper equipment and mechanical proficiency (refer to the Service Manual).
- : Emission Related


116 MAINTENANCE AND ADJUSTMENTS

Control Cables

Throttle Cable Play Inspection

There must be free play in the throttle mechanism.


- Measure the distance the throttle lever moves before the engine begins to pick up speed. Free play should be about 2 mm (0.08 in.).
- If there is improper play, adjust it.

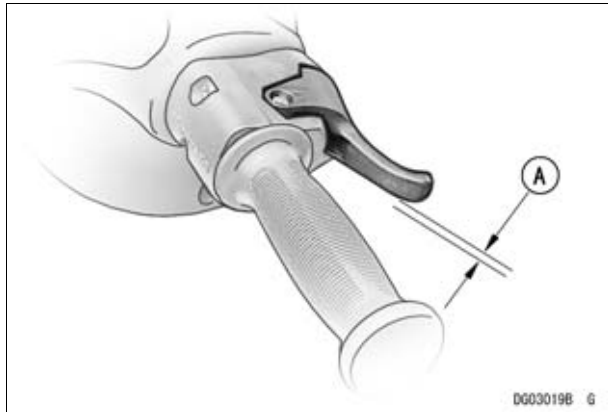

A. about 2 mm (0.08 in.)

Throttle Cable Play Adjustment

- Loosen and turn the locknuts at the end of the throttle cable until the suitable free play is obtained.
- Tighten the locknuts securely.

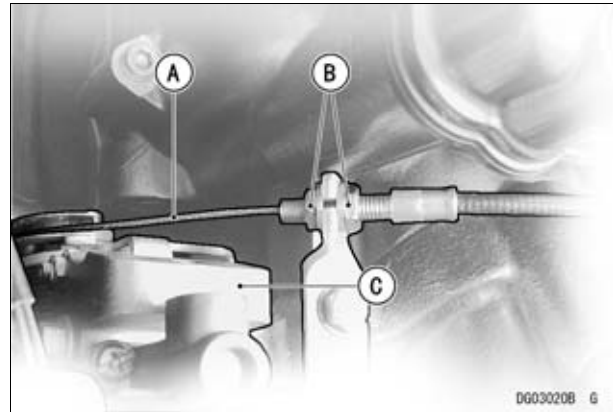


- A. Throttle Cable**
- B. Locknuts**
- C. Throttle Assembly**


Steering Cable Adjustment

- Center the handlebars in a straight ahead steering position.


MAINTENANCE AND ADJUSTMENTS 117

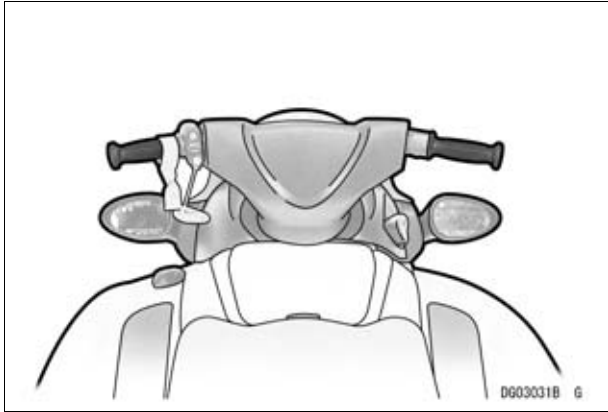

- Check that the steering nozzle is at the same distance from each side of the pump cavity.

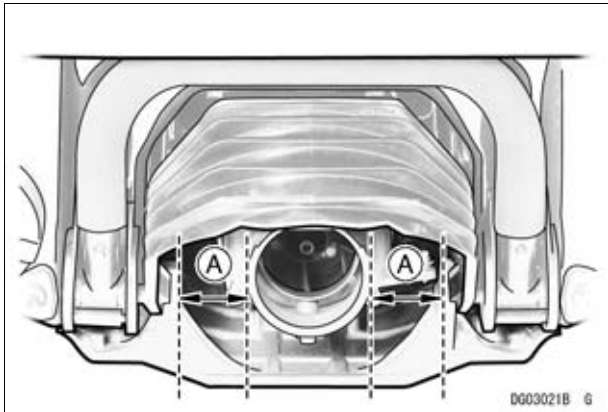


A. Equal

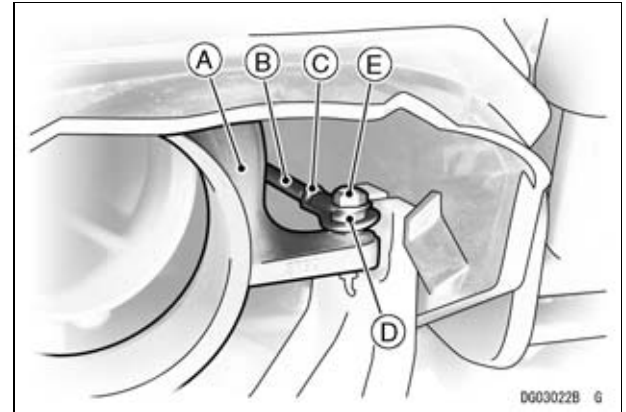

- A. Steering Nozzle**
- B. Steering Cable**
- C. Locknut**
- D. Joint**
- E. Bolt**

- Remove the bolt and disconnect the cable joint from the steering nozzle.
- Center the handlebars in a straight ahead steering position.
- Turn the joint on the cable to adjust the steering.

118 MAINTENANCE AND ADJUSTMENTS

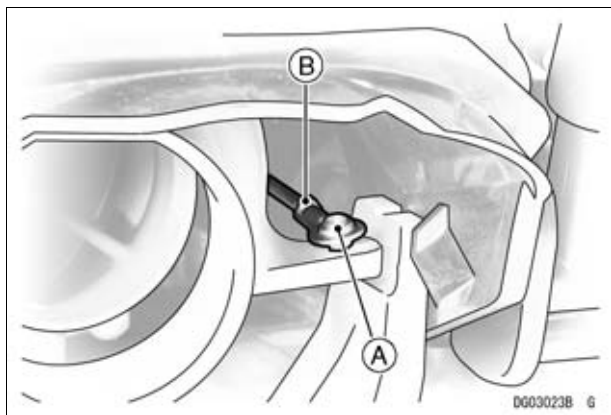

A. Joint


B. Locknut

- Reattach the joint and check cable adjustment again.
- Apply non-permanent locking agent to the bolt before tightening it and locknut if adjusted correctly.

Bolt Tightening Torque:

9.8 N·m (1.0 kgf·m, 87 in·lb)

- As an additional check, turn the handlebar all the way to the left and right, and measure the distance between the nozzle and the edge of the pump cavity. It should be equal at both extremes.

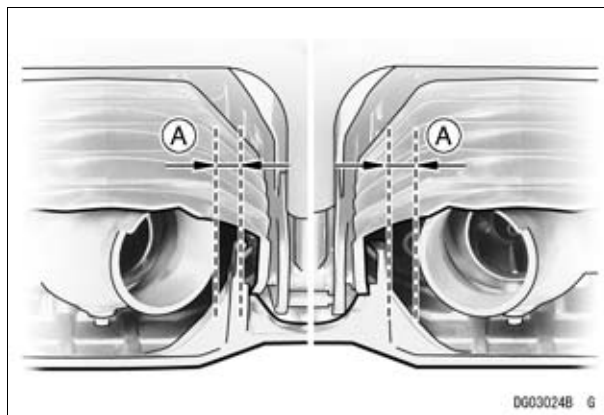

A. Equal

Steering Cable Inspection


Steering cable inspection is best performed by your authorized Kawasaki JET SKI watercraft dealer. If the steering feels rough or "catchy," have your dealer inspect the steering cable.

NOTE

- *The steering cable is sealed at each end and does not require lubrication.*


Shift Cable Adjustment

- Put the shift lever in the "F (Forward)" position.

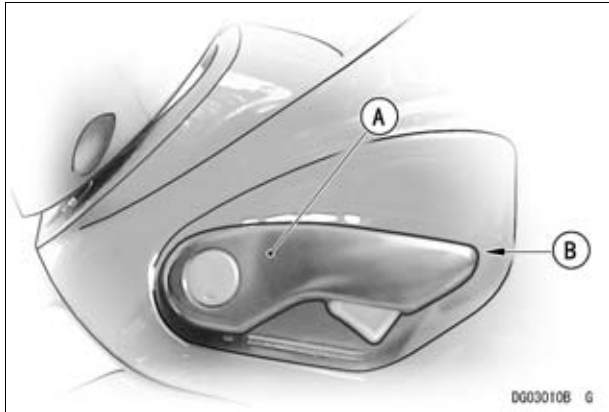

A. Shift Lever
B. "F" position


- The lower edge of the bucket should be held above the top of the steering nozzle with slight play so it doesn't interfere with the water flow from the jet pump.

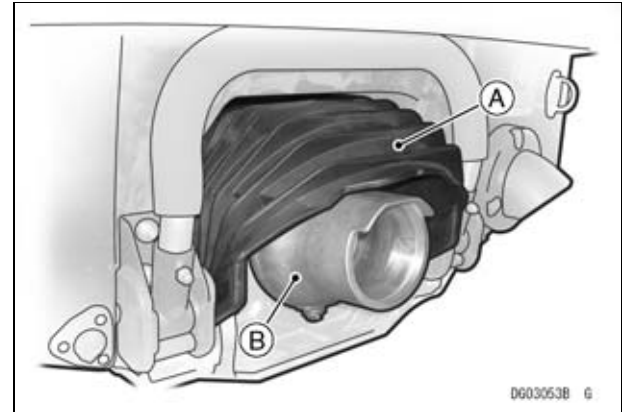

A. Reverse Bucket
B. Steering Nozzle


- Put the shift lever in the "R (Reverse)" position.

120 MAINTENANCE AND ADJUSTMENTS

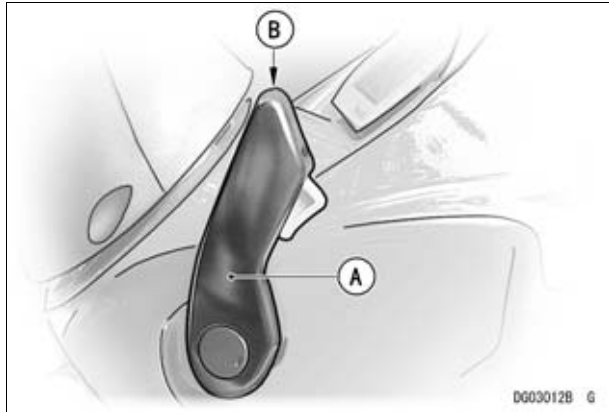


A. Shift Lever
B. "R" position

- The lower stopper on the bucket should rest against the bottom of the pump cover.

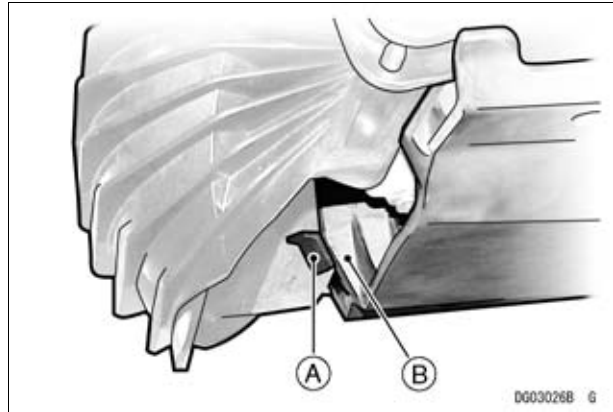

A. Stopper
B. Pump Cover

- If either position is incorrect, adjust the shift cable.
- Put the shift lever in Reverse.
- Loosen the locknut on the end of the shift link.

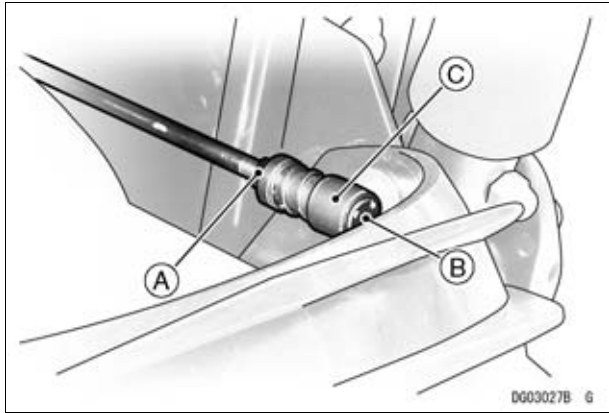


A. Locknut
B. Ball Joint
C. Sleeve

- Slide back the outer sleeve and take the ball joint off the ball.
- Turn the ball joint and reattach it so the lower edge of the bucket is held above the top of the nozzle allowing the bucket to have 2 ~ 3 mm (0.08 ~ 0.12 in.) of play when the shift lever is put in the "F" position.

NOTE

- The cable end must remain screwed into the rod more than 5 mm (0.20 in.) after the above adjustment.

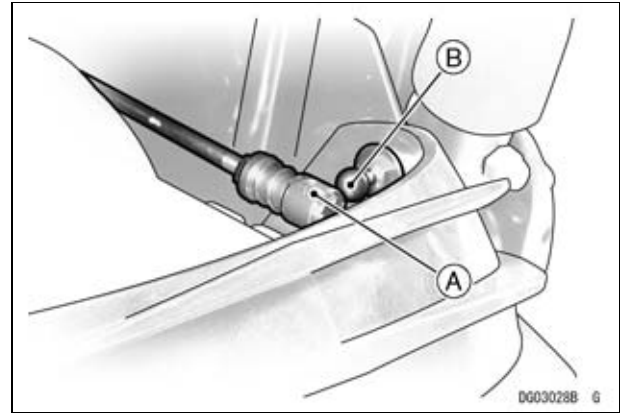

A. Hole
B. Ball

- Check the adjustment again.
- When adjustment is correct, tighten the locknut.

Shift Cable Inspection

Shift cable inspection is best performed by your authorized Kawasaki JET SKI watercraft dealer. If the shift lever feels rough or "catchy," have your dealer inspect the shift cable.

NOTE

- The shift cable is sealed at each end and does not require lubrication.

122 MAINTENANCE AND ADJUSTMENTS

Fuel System

Throttle Adjustments

Idle Speed

Idle speed adjustment is best performed by your authorized Kawasaki JET SKI watercraft dealer. If the idle speed is unstable have your dealer inspect the throttle body.

Idle Speed

1 300 $\pm$ 100 rpm - in water


1 300 $\pm$ 100 rpm - out of water

High Altitude Use

High altitude adjustment is not required as the E.C.U. (electronic engine control unit) controls the air/fuel mixture automatically.

Fuel Vent Check Valve

The fuel tank is equipped with a vent hose. A small plastic check valve mounted in the vent hose allows air to enter the tank, but minimizes fuel spillage when the craft is tipped over. Have the check valve inspected in accordance with the **Periodic Maintenance Chart** by your authorized Kawasaki JET SKI watercraft dealer.

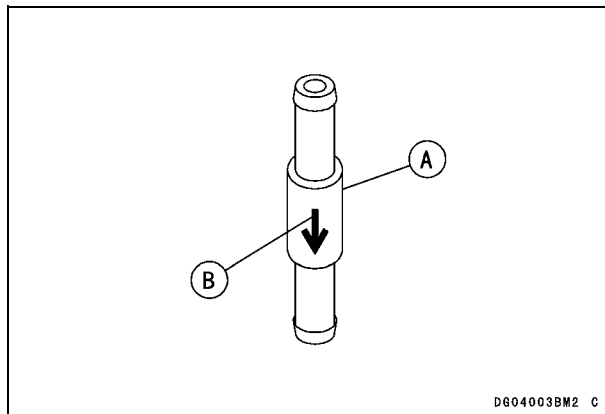

A. Check Valve

B. Flow Direction

Fuel Pump Screen

The watercraft is equipped with fuel pump screens on the fuel pump to prevent dirt or other foreign material from entering the fuel line.

Have your Kawasaki JET SKI watercraft dealer clean the fuel pump screen in accordance with the **Periodic Maintenance Chart**.

Fuel Hose

The rubber fuel hose deteriorates over time. Before boarding the watercraft, before prolonged storage and after prolonged storage, have your authorized JET SKI watercraft dealer check the fuel system.

WARNING

Fuel is extremely flammable and can cause fire or explosion under certain conditions. The fuel hose is always under high pressure while the watercraft is in operation. If there is a crack in the hose due to deterioration or if there is a loose hose connection, gasoline may gush out, resulting in a fire or explosion. Do not start the engine if the hose is damaged or loose.

Engine Oil

In order for the engine to function properly, maintain the engine oil at the proper level, and change the oil and replace the oil filter in accordance with the Periodic Maintenance Chart. Not only do dirt and metal particles collect in the oil, but the oil itself loses its lubricative quality if used too long.

Oil Requirements


Type:	API SG, SH, SJ, SL or SM with JASO MA, MA1 or MA2
Viscosity:	SAE10W-40
Capacity:	4.0 L (4.2 US qt) when filter is not removed. 4.2 L (4.4 US qt) when filter is removed. 5.0 L (5.3 US qt) when engine is completely dry.

NOTE

○ *Do not add any chemical additive to the oil. Oils fulfilling the above requirements are fully formulated and provide adequate lubrication the engine.*


Although 10W-40 engine oil is the recommended oil for most conditions, the oil viscosity may need to be changed to accommodate atmospheric conditions in your riding area.

124 MAINTENANCE AND ADJUSTMENTS

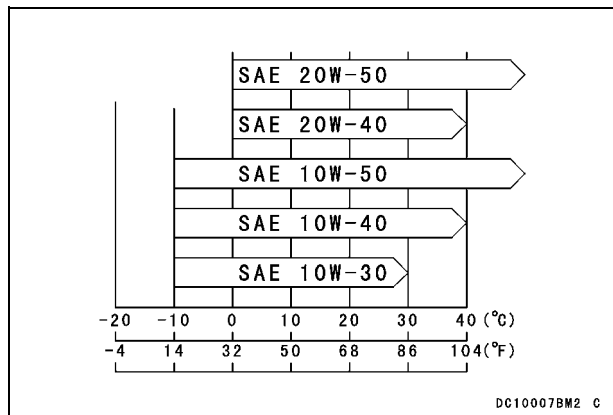

Oil Level Inspection

- Check the engine oil level each day before operating your watercraft and add oil if necessary. Refer to the Pre-Ride Check List in Operating Instruction chapter.
- Whenever you check the oil level, keep your watercraft level side to side and fore to aft as much as possible.

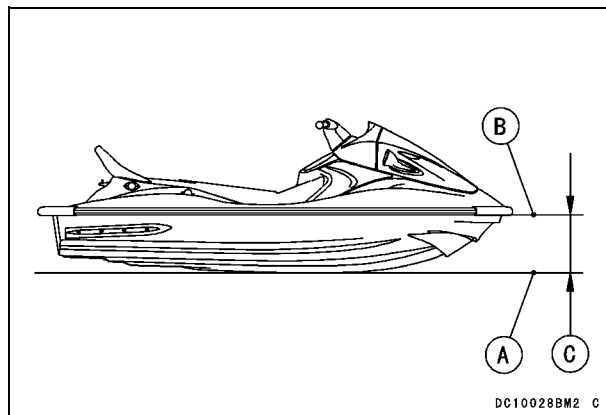


- A. Level Ground
- B. Side Bumper
- C. Parallel

- Remove the dipstick, wipe it dry and insert it back into the dipstick tube so that the finger grip is positioned toward the left side of the hull, and then remove it again to check the oil level.

NOTE

- An accurate oil level cannot be obtained if the dipstick is not installed in the correct direction.

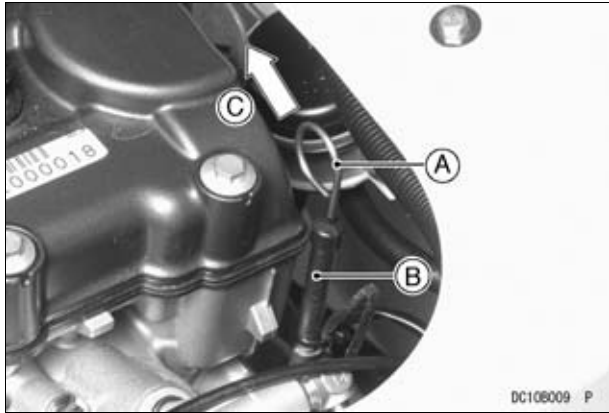


- A. Dipstick
- B. Dipstick Tube
- C. Left side

- The oil level must be between the “H” (High) and “L” (Low) level on the stick. Use the cold level mark.

NOTE

- Be careful when reading the dipstick as different level marks on the dipstick should be used depending if the oil is warm or cold. See the next illustration.

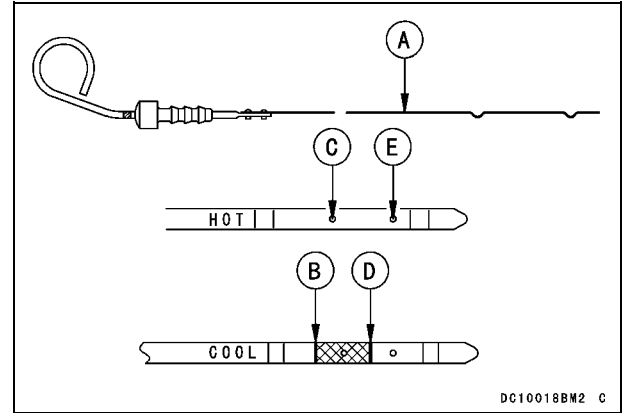

- A. Dipstick
- B. “H” (High) Level when cold
- C. “H” (High) Level when hot
- D. “L” (Low) Level when cold
- E. “L” (Low) Level when hot

- If the oil level is too low, add oil to reach the Low Level. Use the same type and brand of oil that is already in the engine.

NOTICE

Do not allow dirt or foreign materials to enter the engine as they can cause serious engine damage.

Oil and/or Oil Filter Changes

In accordance with the Maintenance Chart, change the engine oil and oil filter as follows:


126 MAINTENANCE AND ADJUSTMENTS

- Level the watercraft port to starboard as well as fore to aft.
- In a well-ventilated area, start the engine while flushing the cooling system.

NOTICE

The engine must be running before the water is turned on and the water must be turned off before the engine is stopped. Do not run the engine without cooling water flow for more than 15 seconds.

- Warm up the engine and stop it.
- Remove the oil filler cap and the dipstick.

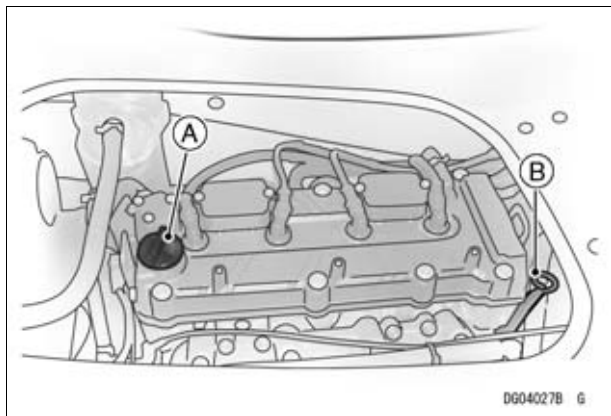

A. Oil Filler Cap
B. Dipstick

NOTICE


Do not allow dirt or foreign materials to enter the engine as they can cause serious engine damage.

- Drain the oil thoroughly from the dipstick tube using a commercially-available vacuum pump.

⚠ WARNING

Used engine oil is toxic and pollutes the environment. To protect the environment, do not discard used engine oil; always return it to an authorized recycling center.

- Put a rag or cloth under the oil filter to absorb any oil that may drip from the oil filter as it is removed.
- Remove the oil filter.

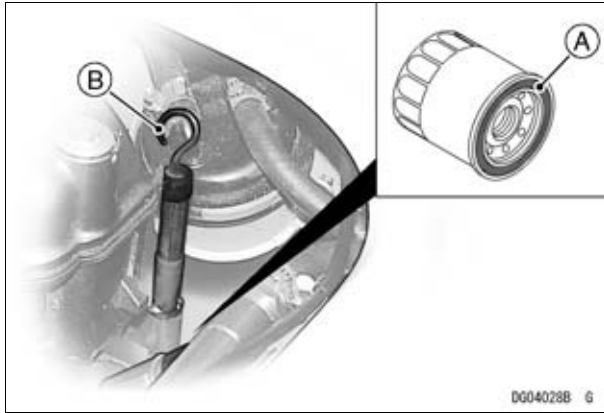

A. Oil Filter Cartridge
B. Dipstick

- Apply a thin film of oil to the gasket and tighten the new cartridge to the specified torque.

Cartridge Tightening Torque:
 18 N·m (1.8 kgf·m, 13 ft·lb)

- Fill the oil up to the “H” (High) level on the dipstick. (Use a cold level mark.)

NOTE

- *Be careful not to overfill. If you have overfilled, remove the excess oil.*
- Install the oil filler cap and dipstick securely.
- Run the engine for several minutes while flushing the cooling system (see the Cooling System Flushing section).

NOTICE

If the water is turned on before the engine is running, water may flow back through the exhaust pipe and into the engine, causing severe engine damage. To prevent engine damage, be sure the engine is running before turning the water on.


- The oil level must be between the “H” (High) and “L” (Low) level again on the stick.
- Check that there are no oil leaks in the engine compartment.

NOTE

- *This procedure requires mechanical skills and tools. If it is beyond your capability, ask your Kawasaki dealer for the service.*

After the oil is filled, measure the oil level carefully as follows:

128 MAINTENANCE AND ADJUSTMENTS

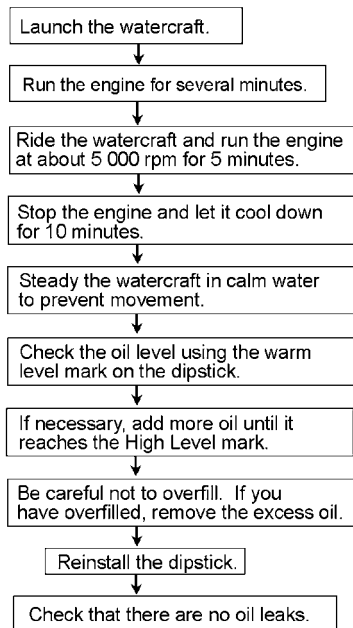

○ *This measuring procedure with the watercraft afloat should be followed if the oil level needs to be topped up.*

DC10029B F

NOTE

○ *Since the trim and list of the watercraft will significantly affect the oil level, be sure that the operator and/or cargo are not aboard the watercraft when measuring the oil level. Also fill up the fuel tank if it is not full.*

Valve Clearance

Valve and valve seats wear decreasing valve clearances, and upsetting valve timing.

NOTICE

If valve clearance is left unadjusted, wear will eventually cause the valves to remain partially open, which lowers performance, burns the valves and valve seats, and may cause serious engine damage. To maintain performance and prevent engine damage, have the valve clearance checked according to the periodic maintenance chart.

- Valve clearance for each valve should be checked and adjusted in accordance with the Periodic Maintenance Chart.
- Inspection and adjustment should be done by an authorized Kawasaki JET SKI watercraft dealer.

Valve Clearance

INTAKE	0.15 ~ 0.24 mm (0.0059 ~ 0.0094 in.)
EXHAUST	0.22 ~ 0.31 mm (0.0087 ~ 0.0122 in.)


Spark Plugs

Since the engine is water-cooled and is generally operated at a constant throttle opening, cylinder head temperature is relatively stable. For this reason, if the engine is in good condition and properly tuned, it should not be necessary to use a spark plug of a different heat range. Since a spark plug of the wrong heat range can cause extensive engine damage, only the standard spark plug is recommended.

Standard Spark Plug

Standard Plug	NGK CR9EKB
Terminal	Solid Post terminal
Plug Gap	0.7 ~ 0.8 mm (0.028 ~ 0.032 in.)
Tightening Torque	13 N·m (1.3 kgf·m, 115 in·lb)

130 MAINTENANCE AND ADJUSTMENTS

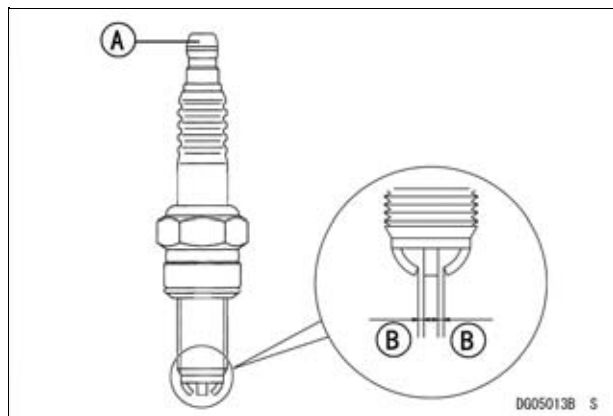

A. Terminal (Solid Post)
B. Plug Gap

Spark Plug Inspection and Replacement

- Remove the spark plugs and inspect the ceramic insulators. The appearance of the insulators reflects the efficiency of the combustion process. When the engine is operating properly, the plug insulators should be clean and show a light brown color. If the insulators look glazed or very white, if the electrodes appear overheated, or if there are gray metallic deposits on the plugs, combustion chamber temperatures are too high. Inspection should be done by an authorized Kawasaki JET SKI watercraft dealer.

NOTICE

Excessive operating temperature can cause serious engine damage. To prevent engine damage, the cause for any excessive operating temperature should be located and corrected immediately.

- A dry, sooty black deposit on the insulators indicates an overly rich fuel/air mixture. Check for correct throttle control cable adjustment. Inspection should be done by an authorized Kawasaki JET SKI watercraft dealer.
- Inspect the condition of the spark plug. If the spark plug electrodes are rounded, damaged, or the insulator is cracked, replace the plug.
- Measure the spark plug gap. Use a wire-type thickness gauge to prevent possible damage to the electrode.

NOTICE

Do not adjust the plug gap. If the plug gap is out of the specification, replace the spark plug.

NOTE

- *If the plug is oily or has carbon build-up, clean it by using a high flash-point solvent and nonmetal brush (nylon etc.).*

NOTICE

To prevent electrode damage do not use a wire brush when cleaning the spark plug.

Spark Plug Fitting

- Apply molybdenum disulfide grease to the threads of the spark plugs.
- Insert the plugs into the plug holes.
- Tighten the plugs with the specific torque.

Tightening Torque:

13 N·m (1.3 kgf·m, 115 in·lb)

- Install the spark plug caps onto the spark plugs securely.
- Pull the caps lightly to make sure they are firmly in place.

Battery

The battery is located under the seat and rear storage case.

The battery installed in this watercraft is a sealed type, and the sealing strip should not be removed at any time after the specified electrolyte has been installed in the battery for initial service. It is not necessary to check the battery electrolyte level or add distilled water.

DANGER

- **Battery acid generates hydrogen gas which is flammable and explosive under certain conditions. It is present within a battery at all times, even in a discharged condition. Keep all flames and sparks (cigarettes) away from the battery.**
- **Wear eye protection when working with a battery. In the event of battery acid contact with skin, eyes, or clothing, wash the affected areas immediately with water for at least five minutes. Seek medical attention.**


132 MAINTENANCE AND ADJUSTMENTS

NOTICE

Removing the sealed cap can damage the battery. To avoid damaging the battery, never remove the sealed cap. Using a conventional battery in this watercraft will cause the electrical system to malfunction. Do not install a conventional battery.

Make	Yuasa Battery
Type	YTX20L-BS

Battery Removal

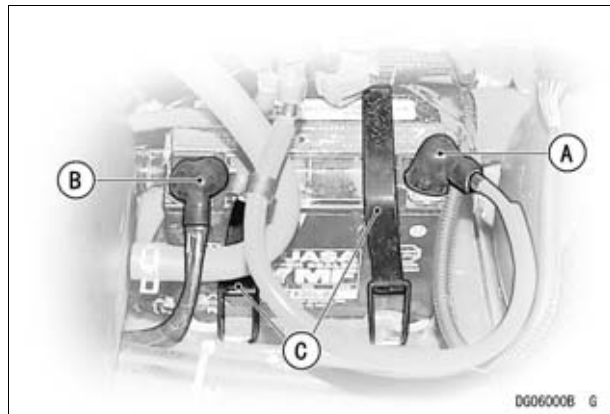


- A. Positive Cable (Red)
- B. Negative Cable (Black)
- C. Straps


Battery Cable Removal

- Turn the ignition switch off.

(1) Slide the rubber cap.

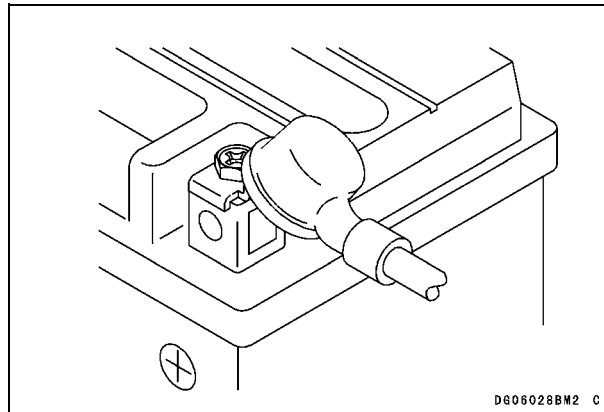


(2) Negative cable removal

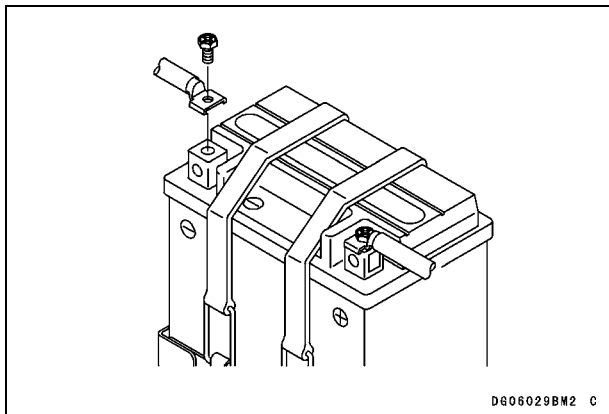

- First, disconnect the negative cable from the battery.


(3) Positive cable removal

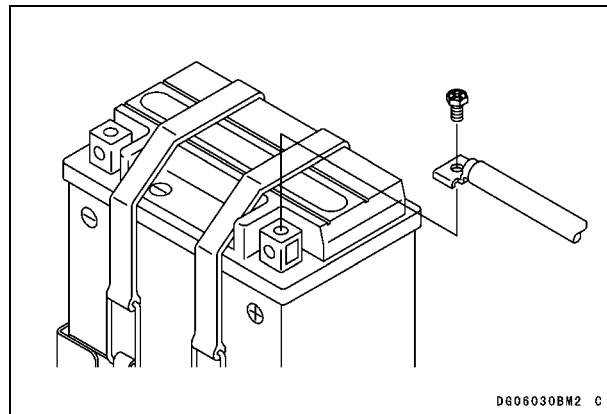

- Next, disconnect the positive cable from the battery.

134 MAINTENANCE AND ADJUSTMENTS


Battery Removal

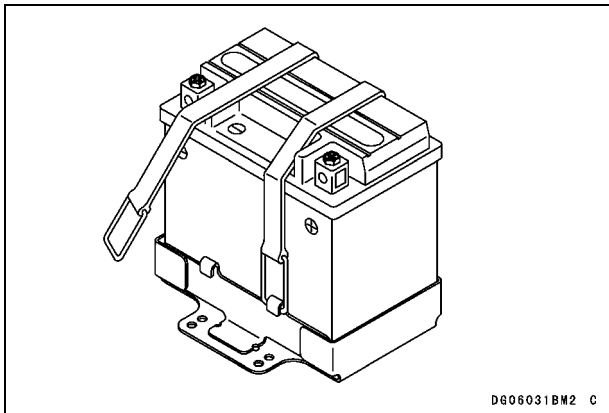

- Release the tags of the hold-down straps from the hooks.

Battery Inspection and Maintenance

(1) Battery terminal oxidation/corrosion (coated with patina/white powder)

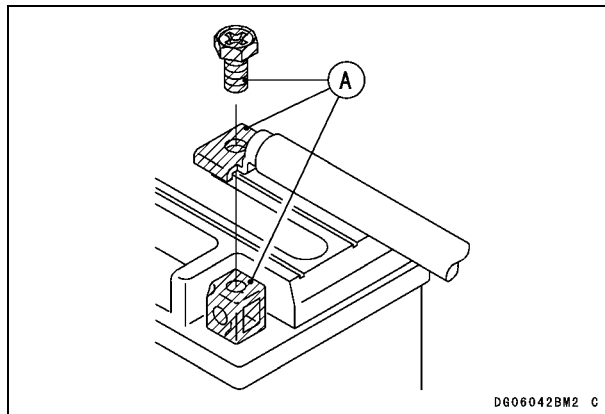


A. Oxidation/Corrosion

<Cleaning>

1. Apply a penetrating lubricating spray.
2. Leave it for five minutes.
3. Wipe off with a cloth or polish with a fine emery cloth or wire brush.


(2) Battery terminal damage (deformation, cracks, dents)

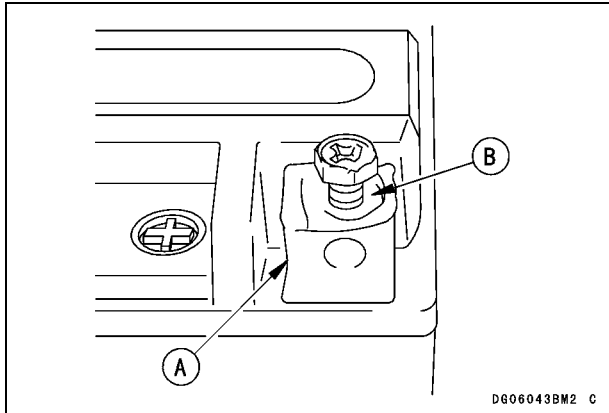

A. Deformation
B. Dents

- If there are any deformation, cracks, or dents, replace the battery.

Battery inspection

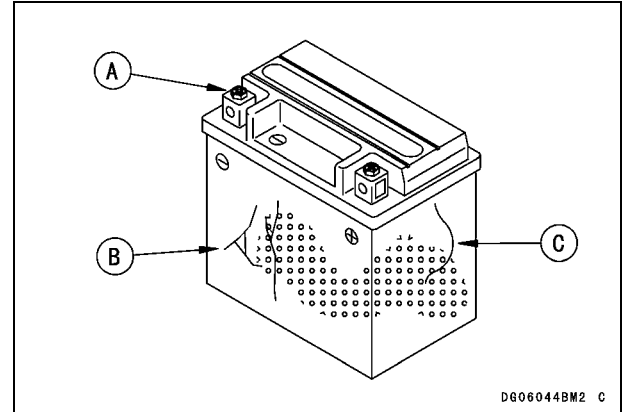


A. Loose
B. Cracks
C. Deformation

- Check the battery for deformation or cracks.


136 MAINTENANCE AND ADJUSTMENTS

(4) Hold-down strap inspection

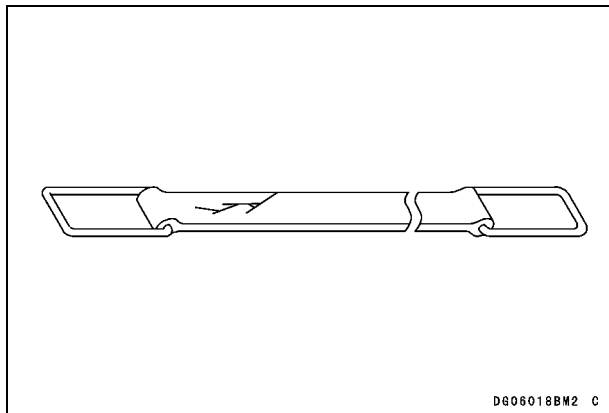

- Check the hold-down strap for deterioration such as cutting, cracking, or looseness.


(5) Battery tray cleaning

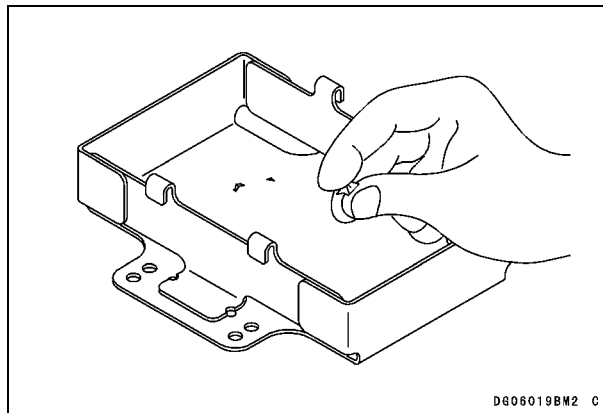

- Inspect the battery tray and remove dust.

Battery Installation

1. Battery installation and fixation

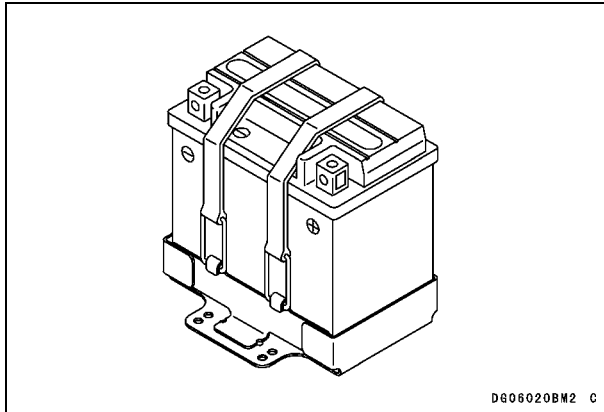


- Secure the battery with the straps and make sure that it is firmly fixed.

2. Cable connection

- Connect the positive cable to the battery first.

(1) Temporal Tightening

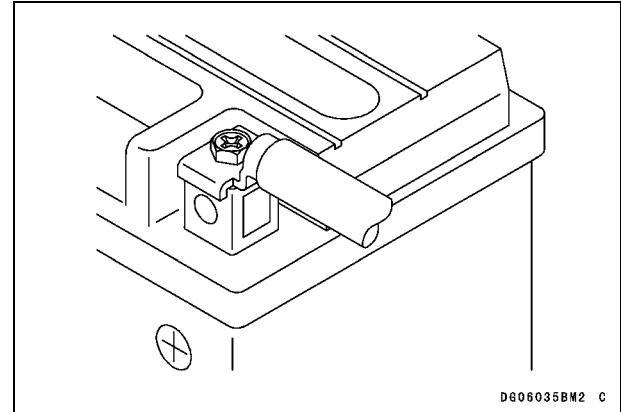

- Pay attention to the cable terminal direction and connect the cable so that the battery terminal and cable terminal are in close contact.

NOTICE

Reversing the battery connections will damage the electrical system. To prevent damage, be sure the battery connections are correct.


138 MAINTENANCE AND ADJUSTMENTS

(2) Tightening




- Tighten the terminal screws securely with a wrench.
- Tighten the positive terminal first, then tighten the negative terminal.

(3) Confirmation of battery cable fixation

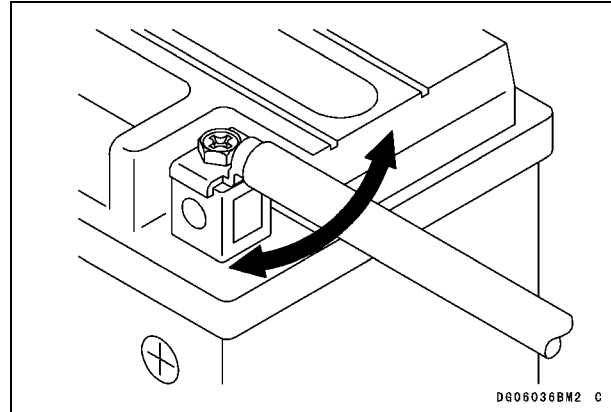

- After tightening both terminals securely, move the cable terminals from side to side and make sure that the cables are fixed and do not move.

(4) Anticorrosive treatment

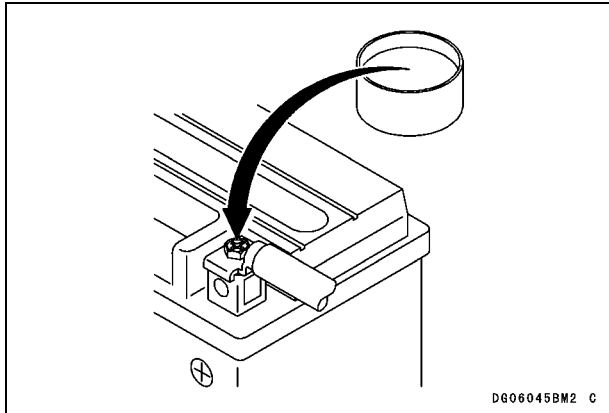

- Apply a grease or a penetrant lubricating spray to the terminals.

(5) Rubber cap installation




- Cover the terminal with the rubber cap completely.


140 MAINTENANCE AND ADJUSTMENTS

Precaution for connecting the cable

(1) To prevent a loose cable connection, do not use a long bolt.

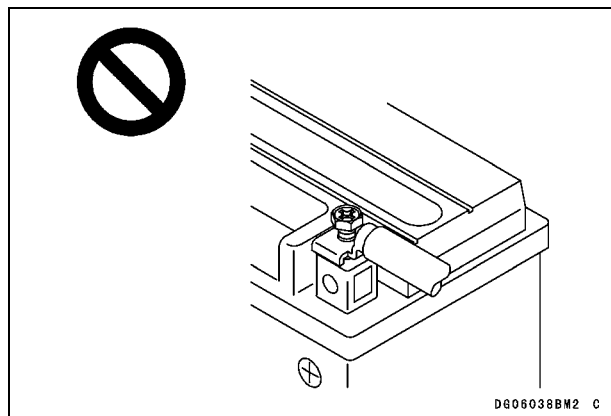


(2) To prevent a loose electrical connection, do not use a wire.

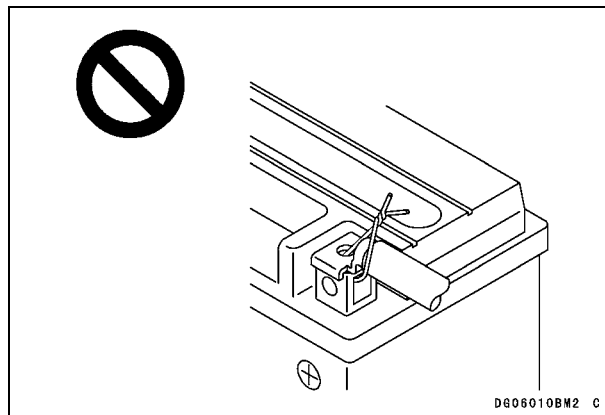


MAINTENANCE AND ADJUSTMENTS 141

(3) To prevent the terminals being deformed or damaged, do not hit the terminals with a hammer.

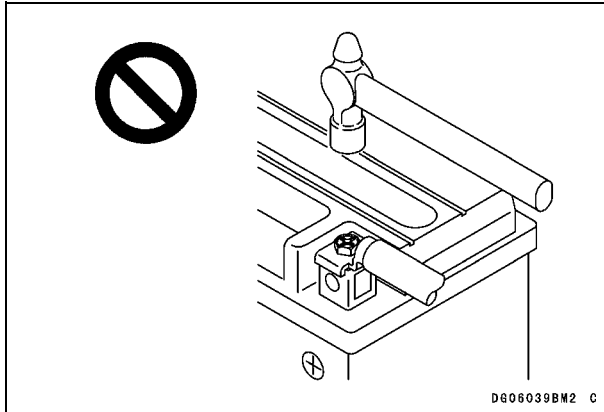

(4) To prevent the terminals from being disconnected by the vibrations during operation, do not use a one-touch coupler.

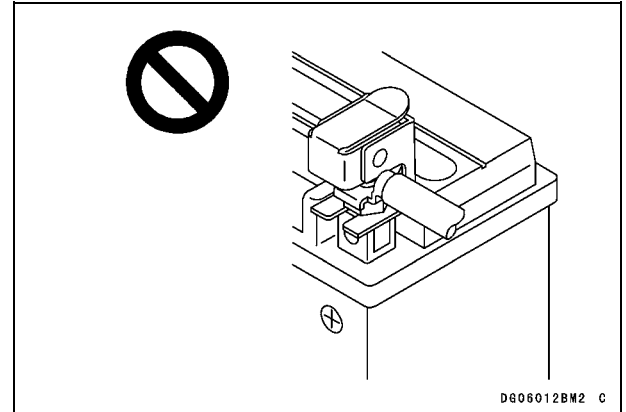

(5) When connecting multiple cable terminals, tighten the terminals securely so there is no clearance between the terminals.

WARNING

Loose battery cables can create sparks which can cause a fire or explosion resulting in injury or death. Make sure the battery terminal screws are tightened securely and the covers are installed over the terminals.

Battery Characteristics

The battery installed in this watercraft is a sealed type and it is not necessary to check the battery

142 MAINTENANCE AND ADJUSTMENTS

electrolyte level or add distilled water. The sealing strip should not be removed after the specified electrolyte has been added to the battery during initial service.

However, in order to maximize battery life and ensure that it will provide the power needed to start your watercraft, you must properly maintain the battery's charge. When used regularly, the charging system in your watercraft helps keep the battery fully charged. If your watercraft is only used occasionally or for short periods of time, the battery is more likely to discharge.

Due to their internal composition, batteries continually self discharge. The discharge rate depends on the type of battery and ambient temperature. As temperatures rise, so does the discharge rate. Every 15°C (59°F) doubles the rate.

Electrical accessories, such as digital clocks and computer memory, also draw current from the battery even when the key is switched off. Combine such "key-off" draws with hot temperatures, and a battery can go from fully charged to completely discharged in a matter of days.

Self-discharge		
Temperature	Approx. Number of Days from 100% Charged to 100% Discharged	
	Lead-Antimony Battery	Lead-Calcium Battery
40°C (104°F)	100 Days	300 Days
25°C (77°F)	200 Days	600 Days
0°C (32°F)	550 Days	950 Days

Current Drain		
Discharging Ampere	Days from 100% Charged to 50% Discharged	Days from 100% Charged to 100% Discharged
7 mA	60 Days	119 Days
10 mA	42 Days	83 Days
15 mA	28 Days	56 Days
20 mA	21 Days	42 Days
30 mA	14 Days	28 Days

In extremely cold weather the fluid in an inadequately charged battery can easily freeze, which can crack the case and buckle the plates. A fully charged battery can withstand sub-zero temperatures with no damage.

Battery Sulfation

A common cause of battery failure is sulfation.

Sulfation occurs when the battery is left in a discharged condition for an extended time. Sulfate is a

normal by product of the chemical reactions within a battery. But when continuous discharge allows the sulfate to crystallize in the cells, the battery plates become permanently damaged and will not hold a charge. Battery failure due to sulfation is not warrantable.

Battery Maintenance

It is the owner's responsibility to keep the battery fully charged. Failure to do so can lead to battery failure and leave you stranded.

If you are riding your watercraft infrequently, inspect the battery voltage weekly using a voltmeter. If it drops below 12.6 volts, the battery should be charged using an appropriate charger (check with your Kawasaki dealer or visit buyKawasaki.com) at a rate (amperage × hours) that is indicated on the battery. If it is not possible to read the rate, charge the battery at an amperage that is about 1/10th of the battery capacity.

If you will not be using your watercraft for longer than two weeks, the battery should be charged using an appropriate charger. Do not use an automotive-type quick charger that may overcharge the battery and damage it.

NOTE

○ *Leaving the battery connected causes the electrical components (clock etc) to discharge the battery and may even over discharge it. In this case, the repair or replacement of the battery is not included in the warranty. If you do not plan to drive for four weeks or more, disconnect the battery from the vehicle.*

Kawasaki-recommended chargers are:

- **Battery Mate 150-9**
- **OptiMate 4**
- **Yuasa MB-2040/2060**
- **Christie C10122S**

If the above chargers are not available, use an equivalent one.

For more details, ask your Kawasaki dealer.

Battery Charging

- Remove the battery from the watercraft (See Battery Removal).
- Set the battery charge timer to the position indicated by the tester.
- Follow the battery charger instructions and charge the battery.

NOTICE

**Removing the sealed cap can damage the battery. To avoid damaging the battery, never remove the sealed cap.
Using a conventional battery in this watercraft will cause the electrical system to malfunction. Do not install a conventional battery.**

NOTE

○ *If you charge the sealed type battery, follow the instructions on the battery label exactly.*


144 MAINTENANCE AND ADJUSTMENTS

Lubrication


As in all marine craft, adequate lubrication and corrosion protection is an absolute necessity to provide long, reliable service. Refer to the **Periodic Maintenance Chart** and **PRE-RIDE CHECK** chapter for the frequency of the following items:

- Lubricate the following with a penetrating rust inhibitor, such as WD40 or BEL-RAY 6 in 1:

Lubricate the Throttle Control Cable with a Pressure Cable Luber

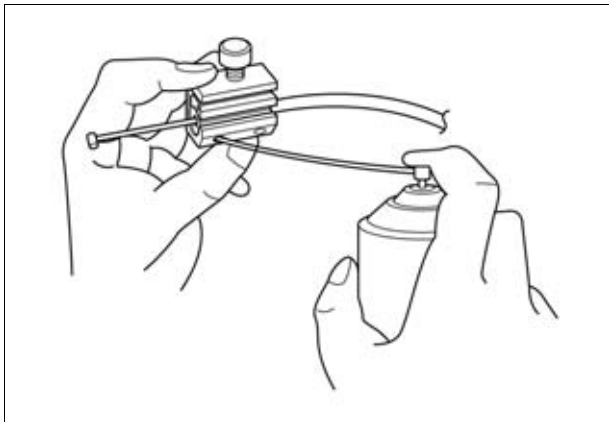

Steering Nozzle/Reverse Bucket Pivots

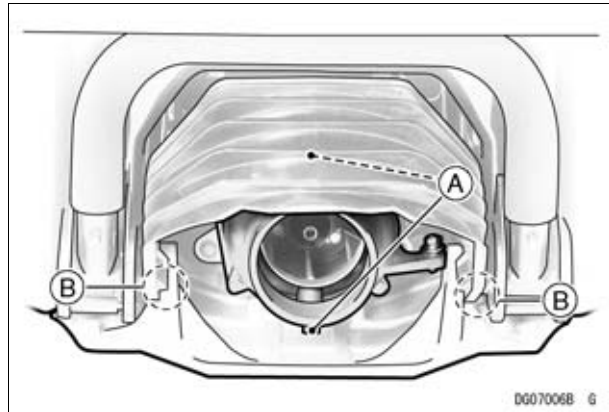


A. Steering Nozzle Pivot

B. Reverse Bucket Pivot


- Lubricate the following with a high quality waterproof marine grease.

Shift Link Ball Joint

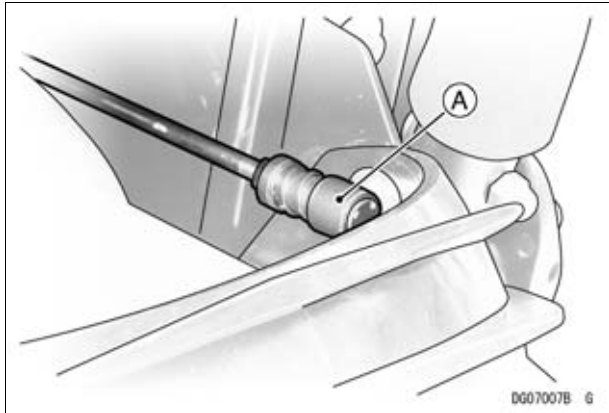

A. Shift Link Ball Joint

Steering Link Ball Joint

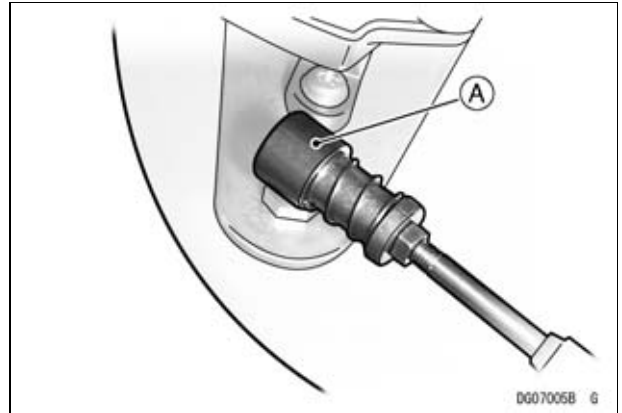


A. Steering Ball Joint at steering Shaft

- Lubrication of the other link joints should be performed by your Kawasaki JET SKI watercraft dealer.

146 MAINTENANCE AND ADJUSTMENTS

Throttle Cable Fitting at Throttle Case

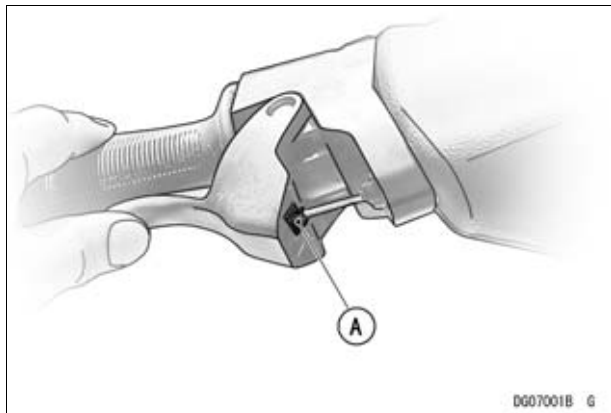

A. Apply grease.

NOTE


- *Disassemble and lubricate the handlebar pivot. This should be performed by your Kawasaki JET SKI watercraft dealer.*

Cooling System Flushing

To prevent sand or salt deposits from accumulating in the cooling system, it must be flushed occasionally. Flush the system according to the **Periodic Maintenance Chart**, after each use in salt water, or whenever there is reduced water flow from the bypass outlet on the right side of the hull.

This procedure is also used to provide auxiliary cooling when the craft is out of the water (for example during engine oil change).

- The auxiliary water supply ports are located at the brim of the front storage case.

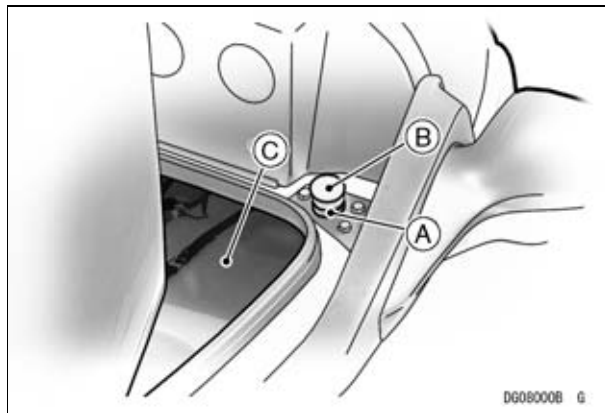

- A. Intake Fitting
- B. Cap
- C. Front Storage Case


To Flush the Engine Cooling System

- Remove the cap and connect a garden hose with a screw-in fitting on its end.
- Start the engine and allow it to idle **before turning on the water.**

NOTICE

If the water is turned on before the engine is running, water may flow back through the exhaust pipe and into the engine, causing severe engine damage. To prevent engine damage, be sure the engine is running before turning the water on.

- Immediately turn on the water and adjust the flow so that a little trickle of water comes out of the bypass outlet in the right side of the hull.

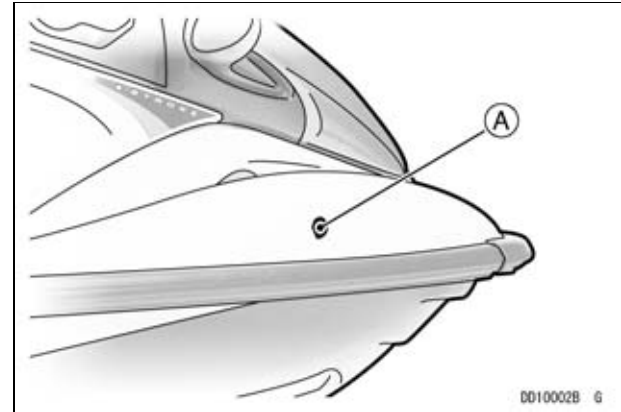

A. Bypass Outlet

- Let the engine idle for several minutes with the water running.
- Turn off the water. **Leave the engine idling.**
- Rev the engine a few times to clear the water out of the exhaust system.

NOTICE

Lack of cooling water causes overheating which will cause severe engine and exhaust system damage. Do not run the engine without cooling water flow for more than 15 seconds.


- Switch off the engine, and remove the garden hose, reinstall the cap securely.

148 MAINTENANCE AND ADJUSTMENTS

Bilge System Flushing

To prevent clogging, the bilge system should be flushed out according to the **Periodic Maintenance Chart**, or whenever you suspect it is blocked.


- Disconnect all bilge hoses at the plastic breather fittings. They are mounted on the rear upper corner in the engine compartment.

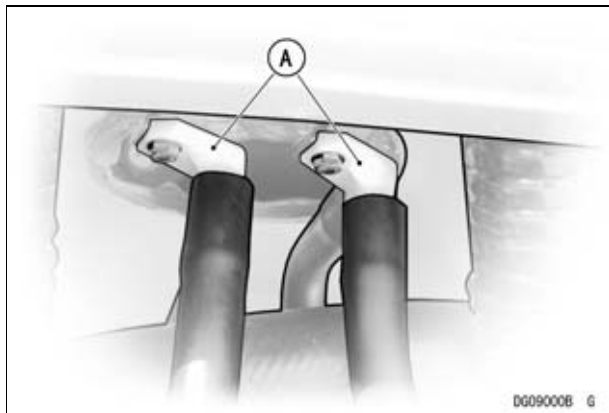

A. Breather Fittings

- Connect the bilge filter hose, which comes from the hull bottom, to the garden hose, turn the water on, and flush it out for about a minute. During this procedure, water will flow into the engine compartment. Do not allow a large amount of water to accumulate in the engine compartment. Remove the drain screws in the stern to drain the engine compartment.

- Connect the other hose to the garden hose, turn the water on, and flush it out for several minutes.
- Before reconnecting the hoses to each plastic breather fitting, make sure the small breather hole in the fittings is clear. If the hole is clogged, the engine compartment will fill with water when the engine stops or idles. It may be necessary to remove the fitting.

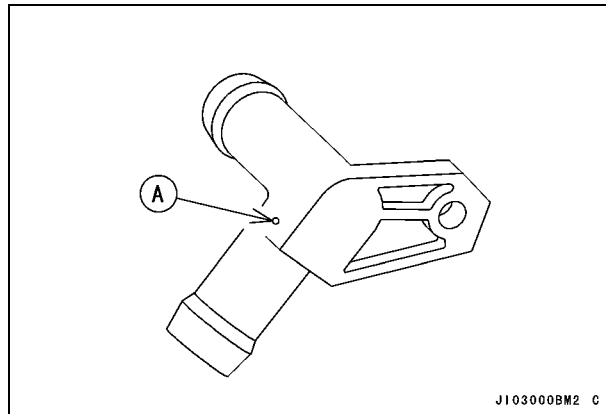

A. Breather Hole

- Reconnect the bilge hoses.

NOTE

- If your watercraft is to be stored, blow air through both hoses at each breather fitting before they are reconnected (see the **Storage** section in the **TRANSPORTING AND STORAGE** chapter).

Jet Pump Bearings/Seals


NOTICE

Major engine damage can result if the jet pump bearings fail due to lack of maintenance. To help prevent this, follow the periodic maintenance schedule for the jet pump bearings.

Have your Kawasaki dealer inspect the jet pump bearings and seals after the first 25 hours of use or one year, whichever comes first; and then every 50 hours or every year, whichever comes first. The jet pump bearings should also be serviced before any prolonged storage to prevent any water that may be left in the pump from corroding the bearings and causing premature failure.

Fuses

A 20 A main fuse is installed in the fuse case located on starboard side in the engine room. If a fuse fails during operation, inspect the electrical system to determine the cause, and then replace it with a new fuse of proper amperage.

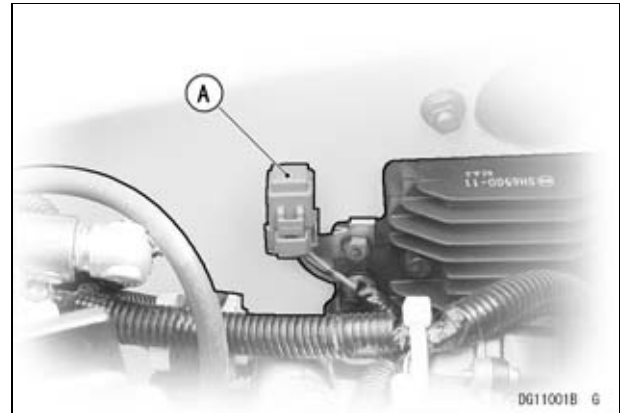


A. Fuse Case

NOTICE

Incorrect fuses can damage the electrical system and may lead to a fire. To prevent damage and fire, do not substitute fuses. Replace the blown fuse with a new one of the correct capacity, as specified on the electric case.

150 MAINTENANCE AND ADJUSTMENTS

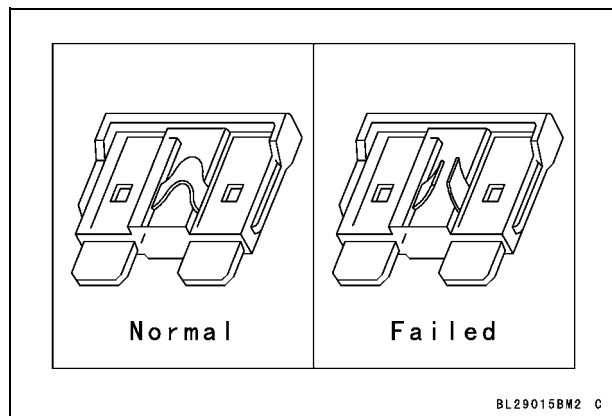

 IN AN EMERGENCY

Troubleshooting Guide

If this procedure does not identify your problem, see your JET SKI watercraft dealer or refer to the Service Manual.

152 IN AN EMERGENCY

PROBLEM	POSSIBLE CAUSE	REMEDY
Engine does not start Starter motor does not turn over Starter motor turns over	Ignition key	Not inserted Insert key
	Lanyard key	Not pushed under stop button Insert lanyard key under stop button
	Ignition switch	Ignition switch turned "OFF" and/or lanyard key not pushed under stop button Turn the ignition switch "ON" and/ or insert lanyard key under stop button
	Battery	Battery voltage low Charge the battery
		Battery connections loose Check the battery connections
	Fuse	Fuse is blown Inspect the wiring, and then replace fuse with a new one
	Fuel	Fuel tank low Refuel in fuel tank
		Fuel is old or dirty Inspect fuel by an authorized Kawasaki JET SKI watercraft dealer
	Fuel tank	Water and dust contained in the fuel tank Inspect fuel tank by an authorized Kawasaki JET SKI watercraft dealer
	Spark plug	Fouled or worn spark plug Inspect spark plug by an authorized Kawasaki JET SKI watercraft dealer
	Spark plug cap	Poor attachment Install spark plug cap properly and firmly
		Damage Inspect spark plug cap by an authorized Kawasaki JET SKI watercraft dealer

PROBLEM	POSSIBEL CAUSE		REMEDY
Engine misfires, runs rough	Spark plug	Fouled or worn spark plug	Inspect spark plug by an authorized Kawasaki JET SKI watercraft dealer
		Wrong heat range	Replace correct spark plug
	Spark plug cap	Poor attachment	Install spark plug cap properly and firmly
		Damage	Inspect spark plug cap by an authorized Kawasaki JET SKI watercraft dealer
	Fuel	Fuel tank low fuel level	Refuel in fuel tank
		Fuel is old or dirty	Inspect fuel by an authorized Kawasaki JET SKI watercraft dealer
	FI system	FI system malfunction	Inspect FI system by an authorized Kawasaki JET SKI watercraft dealer

PROBLEM	POSSIBEL CAUSE		REMEDY
Engine will not run above 3 000 RPM			
Warning indicator light goes on	Engine protection function	Engine protection function operates	See the table (Inspect engine protection function by an authorized Kawasaki JET SKI watercraft dealer)
Cooling water temperature gets high	Jet pump	Weeds or debris in jet pump	Clean jet pump water intake duct
	Cooling system	Cooling water line clogged	Inspect cooling system by an authorized Kawasaki JET SKI watercraft dealer
	Engine oil	Quantity of engine oil is insufficient	Add up to specified value
Steering hard or erratic	Steering pivot	No lubricant on steering pivot	Lubricate steering pivot
	Steering cable	Steering cable damaged	Replace any damaged steering cable
		Steering cable improperly routed	Rout steering cable properly

DH01111B F

WARNING

Faulty steering can cause an accident resulting in serious injury or death. To help prevent an accident, have any steering problems examined by an authorized Kawasaki JET SKI watercraft dealer.

In the Case of Emergency

Towing the JET SKI watercraft

Refer to the Towing (a wakeboarder, water skier, tuber, etc.) section in the GENERAL INFORMATION chapter.

Jump Starting

If your watercraft's battery is run down, it should be removed and charged. If this is not practical, a booster battery and jumper cables may be used to start the engine. The booster battery must be of the same voltage as the watercraft battery (12 V).

DANGER


Battery acid generates hydrogen gas which is flammable and explosive under certain conditions. It is present within a battery at all times, even in a discharged condition. Keep all flames and sparks (cigarettes) away from the battery. Wear eye protection when working with a battery. In the event of battery acid contact with skin, eyes, or clothing, wash the affected areas immediately with water for at least five minutes. Seek medical attention.

- Remove the ignition key.
- Remove the seat and take off the rear storage case.
- Connect a jumper cable between the positive (+) terminals of the two batteries.

- Connect one end of the remaining jumper cable to the negative (–) terminal of the booster battery.

NOTICE

Connecting two batteries in reverse polarity (+ to –) can seriously damage the electrical system. To prevent electrical system damage, be sure the cables are connected to the correct terminals.

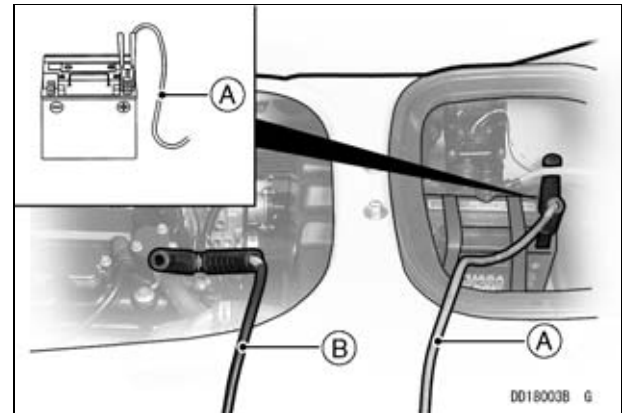

**A. Positive Cable
B. Negative Cable**

- Connect the other end of the remaining jumper cable to the exhaust pipe bolt.

** DANGER**

Batteries contain sulfuric acid that can cause burns and produce hydrogen gas which is highly explosive. Do not make this last connection at the throttle body, injector or battery. Take care not to touch the positive and negative cables together, and do not lean over the battery when making this last connection. Do not jump start a frozen battery, it could explode.

NOTICE

Do not operate the starter continuously for more than 5 seconds or the starter will overheat. Wait 15 seconds between each operation of the starter to let it cool.

- Start the watercraft engine following the standard engine starting procedure and then disconnect the jumper cables in the reverse of the sequence just described.

APPENDIX

ENVIRONMENTAL PROTECTION

To help preserve the environment, properly discard used batteries, oils and fluids, or other vehicle components that you might dispose of in the future. Consult your authorized Kawasaki dealer or local environmental waste agency for their proper disposal procedure. This also applies to disposal of the entire vehicle at the end of its life.

Do not contaminate beaches, coasts, and waters with spilled fuel or oil and take care to preserve natural habitats and living things.

SPECIFICATIONS

JET SKI WATERCRAFT - MODELS JT1500A CATEGORY C

Maximum Number of Riders and Load Limit:		
Maximum number of riders	3 persons (1 operator and 2 passengers) 2 persons (1 operator and 1 observer) when towing a water skier, wakeboarder, or tuber	
Load limit	225 kg including riders and cargo	496 lb
Engine:		
Type	4-stroke, 4-cylinder, DOHC, 4-valve, water-cooled	
Displacement	1 498 cm ³	91.4 cu in.
Bore and Stroke	83 × 69.2 mm	3.27 × 2.72 in.
Compression Ratio	10.6 : 1	
Ignition System	Digital transistor	
Lubrication System	Semi-drysump	
Fuel System	Digital fuel injection	
Research Octane Number (RON)	Minimum Rating 91	
Starting System	Electric starter	
Tuning Specifications:		
Spark Plug	NGK CR9EKB	
Gap	0.7 ~ 0.8 mm	0.028 ~ 0.032 in.
Terminal	Solid post terminal	

Ignition Timing		3° ATDC @1 300 r/min (rpm) ~ 32° BTDC @3 000 r/min (rpm)	
Idle Speed		1 300 ±100 r/min (rpm) - in water 1 300 ±100 r/min (rpm) - out of water	
Drive System:			
Coupling		Direct drive from engine	
Jet Pump:	Type	Axial flow, single stage	
	Thrust	4 130 N (421 kgf)	928 lb
Steering		Steerable nozzle	
Braking		Water drag	
*Performance:			
Maximum Engine Power		112 kW (152 PS) @7 500 r/min (rpm)	
Minimum Turning Radius		4.0 m	13.1 ft
Fuel Consumption		43 L/h at full throttle	11.4 gal (U.S.)/hr
Cruising Range		134 km at full throttle 1 hour and 26 minutes	83.3 mi
Dimensions:			
Overall length		3 120 mm	122.8 in.
Overall width		1 180 mm	46.5 in.
Overall Height		1 050 mm	41.3 in.
Curb Mass		383 kg	845 lb
Air Draft (1)		780 mm	30.7 in.
Maximum Draft (2)		370 mm	14.6 in.


160 APPENDIX

Fuel Tank Capacity	62 L	16.38 gal (U.S.)
Engine Oil:		
Type	API SG, SH, SJ, SL or SM with JASO MA, MA1 or MA2	
Viscosity	SAE10W-40	
Oil Capacity	5.0 L	5.3 qt (U.S.)
Electrical Equipment:		
Battery	12 V 18 Ah (10 HR)	

- (1) Vertical distance between the floating plane in the light craft condition and the highest point of the craft structure, namely the handle top.
- (2) Draft in the fully loaded craft condition.
- * The information shown here represents results under controlled conditions, and the information may not be correct under other conditions.


Serial Numbers

The craft and engine identification numbers are used to register the boat. They are the only means of identifying your particular machine from others of the same model. These serial numbers may be needed by your dealer when ordering parts. In the event of theft, investigating authorities will require both numbers as well as the model number and any unique features of your machine that could help identify it. Record these numbers here.

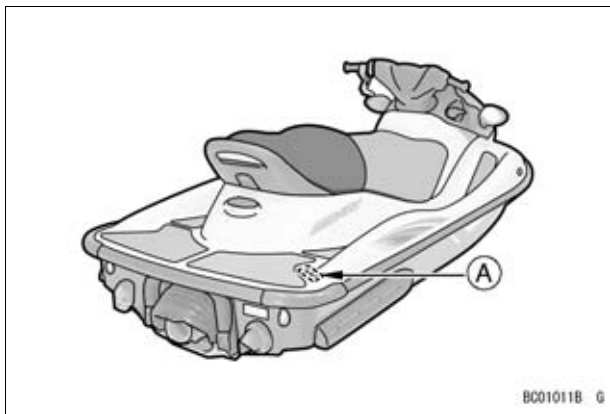

A. Craft Identification Number (CIN)

C.I.N.	
--------	--

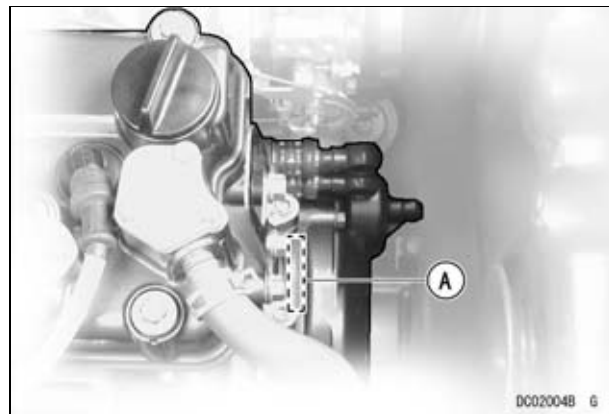


A. Engine Number

Eng. No.	
----------	--


The engine number can also be confirmed by the label on the engine top.

Registration Numbers

The graphic design of your JET SKI watercraft provides a specific location on each side for the registration numbers and validation decals.

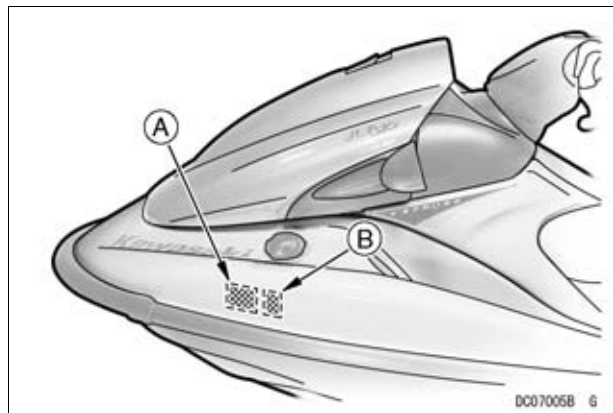

A. Location for Registration Number
B. Location for Validation Decal

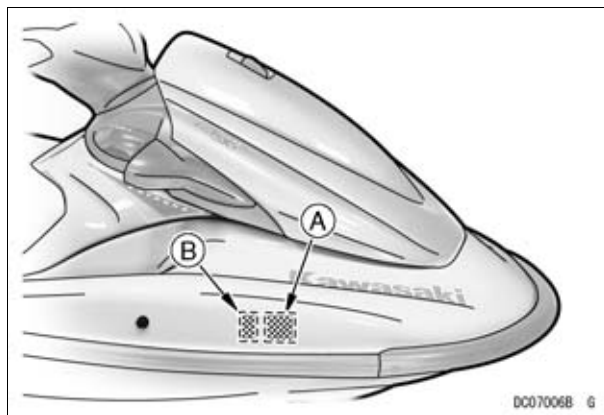

A. Location for Registration Number
B. Location for Validation Decal


The registration numbers must read from left to right on both sides of the watercraft. Typically, the validation decal must be placed 3 inches (76.2 mm) beyond, and level with the first or last letter of the identification number.

NOTE

○ *Requirements for registration numbers and validation decals may vary from those given here for your state. Always follow the directions provided at the time you register your watercraft.*

Registration numbers must be block characters no less than 3 inches (76.2 mm) in height. They should be a color contrasting with the background. The spaces between the numerals and the

prefix/suffix letters must be equal to the width of any letter except "I" or any number except "1."

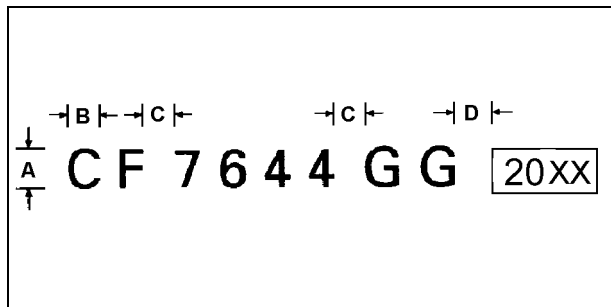

A = 3 inches (76.2 mm) minimum

B = C

D = 3 inches (76.2 mm)

Warranty Start Date

[illegible]

[illegible]

11

[illegible]

[illegible]

JT1500AJ



Kawasaki Heavy Industries, Ltd. Motorcycle & Engine Company

Printed in Japan

GB

DE

FR